

8-BIT SINGLE-CHIP MICROCONTROLLER

DESCRIPTION

The μ PD780001 is a product of the 78K/0 Series of microcontrollers, and features internal 8-bit resolution A/D converters, timers, serial interface units, interrupt controllers, and many other incorporated peripheral hardware.

A one-time PROM or EPROM version (μ PD78P018F) and various development tools for the μ PD780001 are available. The μ PD78P018F is capable of operating in the same power supply voltage range as the μ PD780001.

Functions are described in detail in the following User's Manuals. They should be read before starting design.

μ PD780001 User's Manual : In preparation

78K/0 Series User's Manual—Instruction : IEU-1372

FEATURES

- Internal ROM and RAM
 - Internal ROM : 8 Kbytes
 - Internal high-speed RAM : 192 bytes
- Two types of packages are provided:
 - 64-pin plastic shrink DIP (750 mil)
 - 64-pin plastic QFP (14 × 14 mm)
- Instruction execution time can be varied from high-speed (0.4 μ s) to low-speed (6.4 μ s)
- I/O ports : 39
- 8-bit resolution A/D converter : 8 channels
- Serial interface : 1 channel
 - 3-wire serial I/O mode : 1 channel
- Timer : 3 channels
- Supply voltage : $V_{DD} = 2.7$ to 5.5 V

APPLICATIONS

Telephones, VCRs, audio equipment, cameras, air conditioners, home appliances, pagers, etc.

ORDERING INFORMATION


Part Number	Package
μ PD780001CW-xxx	64-pin plastic shrink DIP (750 mil)
μ PD780001GC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)

Remark xxx indicates ROM code suffix.

The information in this document is subject to change without notice.

★ 78K/0 Series Development

The following shows the 78K/0 series products development. Subseries names are shown inside frames.

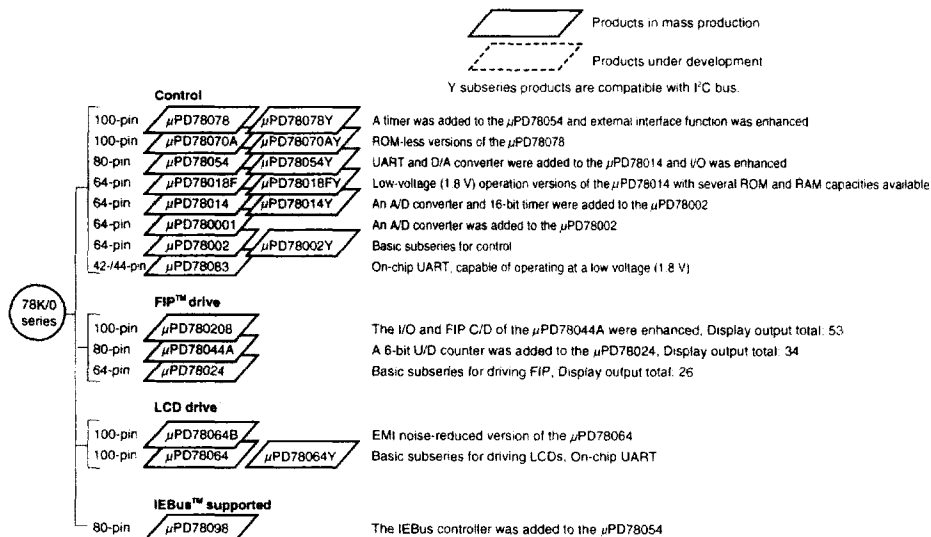

The following table shows the differences among subseries functions.

Part Number	Function	ROM Capacity	Timer				8-bit A/D	8-bit D/A	Serial Interface	I/O	V _{DD} MIN. Value	External Expansion
			8-bit	16-bit	Watch	WDT						
Control	μPD78078	32 K-60 K	4ch	1ch	1ch	1ch	8ch	2ch	3ch (UART: 1ch)	88	1.8 V	Available
	μPD78070A	—	2ch	—	—	—	—	—	—	61	2.7 V	
	μPD78054	16 K-60 K								69	2.0 V	
	μPD78018F	8 K-60 K								53	1.8 V	
	μPD78014	8 K-32 K	—	—	—	—	—	—	1ch	—	2.7 V	Not available
	μPD780001	8 K								39	—	
	μPD78002	8 K-16 K								53	—	Available
	μPD78083	—	—	—	—	—	8ch	—	1ch (UART: 1ch)	33	1.8 V	Not available
FIP drive	μPD780208	32 K-60 K	2ch	1ch	1ch	1ch	8ch	—	2ch	74	2.7 V	Not available
	μPD78044A	16 K-40 K	—	—	—	—	—	—	—	68	—	
	μPD78024	24 K-32 K								54	—	
LCD drive	μPD78064B	32 K	2ch	1ch	1ch	1ch	8ch	—	2ch (UART: 1ch)	57	2.0 V	Not available
	μPD78064	16 K-32 K	—	—	—	—	—	—	—	—	—	
IEBus supported	μPD78098	32 K-60 K	2ch	1ch	1ch	1ch	8ch	2ch	3ch (UART: 1ch)	69	2.7 V	Available


FUNCTION DESCRIPTION

Item		Function
Internal memory	ROM	8 Kbytes
	Internal high-speed RAM	192 bytes
	Memory space	64 Kbytes
General register		8 bits × 32 registers (8 bits × 8 registers × 4 banks)
Instruction cycles		Instruction execution time variable function is integrated. 0.4 μs/0.8 μs/1.6 μs/3.2 μs/6.4 μs (@ 10.0 MHz operation with main system clock)
Instruction set		• 18-bit operation • Multiply/divide (8 bits × 8 bits, 16 bits ÷ 8 bits) • Bit manipulate (set, reset, test, Boolean operation) • BCD adjust, etc.
I/O ports		Total : 39 • CMOS input : 4 • CMOS input/output : 35
A/D converter		• 8-bit resolution × 8 channels • Operable over a wide power supply voltage range: $V_{DD} = 2.7$ to 5.5 V
Serial interface		3-wire serial I/O mode: 1 channel
Timer		• 8-bit timer/event counter: 2 channels • Watchdog timer: 1 channel
Timer output		2
Clock output		39.1 kHz, 78.1 kHz, 156 kHz, 313 kHz, 625 kHz, 1.25 MHz (@ 10.0 MHz operation with main system clock)
Buzzer output		2.4 kHz, 4.9 kHz, 9.8 kHz (@ 10.0 MHz operation with main system clock)
Vectored interrupts	Maskable interrupts	Internal: 5, External: 3
	Non-Maskable interrupt	Internal: 1
	Software interrupt	Internal: 1
Test input		External: 1
Supply voltage		$V_{DD} = 2.7$ to 5.5 V
Operating ambient temperature		$T_A = -40$ to $+85^{\circ}\text{C}$
Package		• 64-pin plastic shrink DIP (750 mil) • 64-pin plastic QFP (14 × 14 mm)

1. PIN CONFIGURATION (Top View)


- 64-Pin Plastic Shrink DIP (750 ml)

μ PD780001CW-xxx

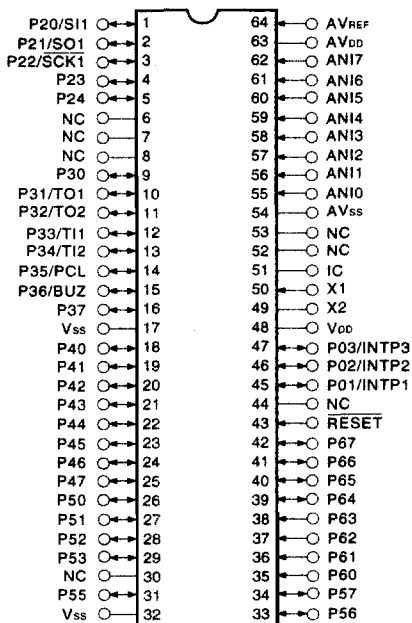

- Cautions**
1. Always connect the IC (Internally Connected) pin to V_{SS} directly.
 2. Always connect the NC (Non-connection) pin to V_{SS} (However, can also be left open).
 3. Always connect the AV_{DD} pin to V_{DD}.
 4. Always connect the AV_{SS} pin to V_{SS}.


- 64-Pin Plastic QFP (14 x 14 mm)
- μPD780001GC-xxx-AB8

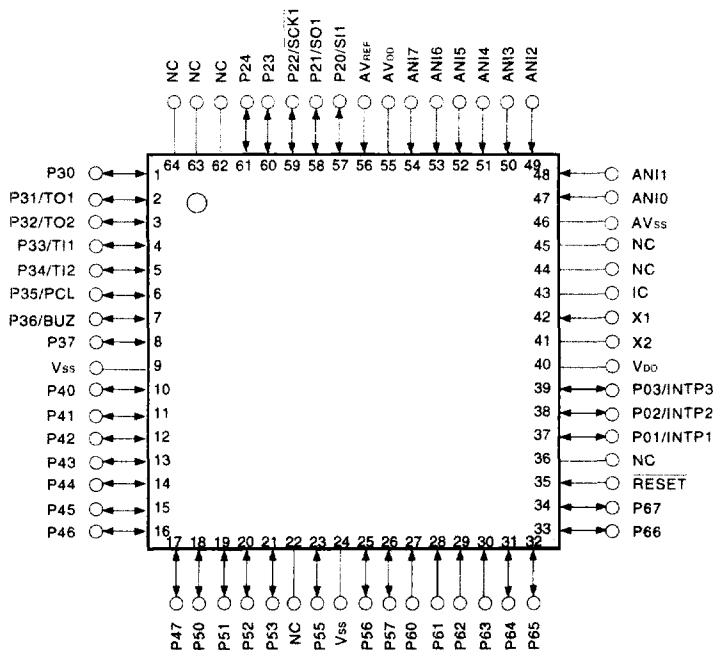

- Cautions**
1. Always connect the IC (Internally Connected) pin to Vss directly.
 2. Always connect the NC (Non-connection) pin to Vss (However, can also be left open).
 3. Always connect the AVDD pin to VDD.
 4. Always connect the AVss pin to Vss.

P01-P03	: Port 0	PCL	: Programmable Clock
P20-P24	: Port 2	BUZ	: Buzzer Clock
P30-P37	: Port 3	X1, X2	: Crystal
P40-P47	: Port 4	RESET	: Reset
P50-P53, P55-P57	: Port 5	ANI0-ANI7	: Analog Input
P60-P67	: Port 6	AV _{DD}	: Analog Power Supply
INTP1-INTP3	: Interrupt from Peripherals	AV _{SS}	: Analog Ground
TI1, TI2	: Timer Input	AV _{REF}	: Analog Reference Voltage
TO1, TO2	: Timer Output	V _{DD}	: Power Supply
SI1	: Serial Input	V _{SS}	: Ground
SO1	: Serial Output	IC	: Internally Connected
SCK1	: Serial Clock	NC	: Non-Connection

2. BLOCK DIAGRAM

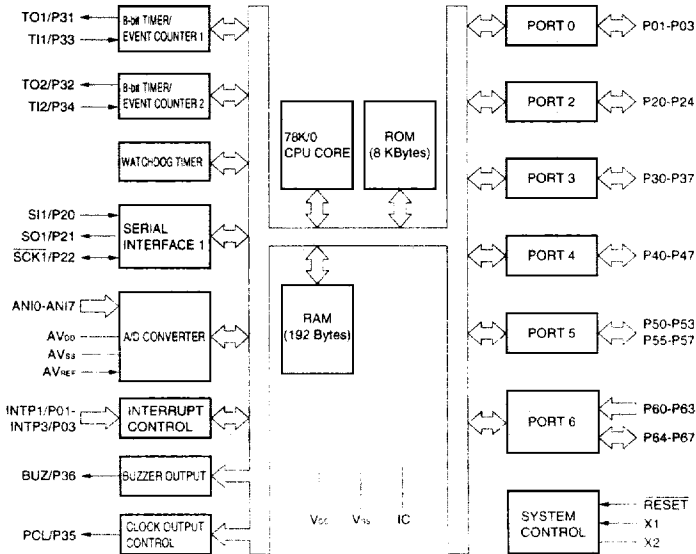

3. PIN FUNCTIONS

3.1 Port Pins

Pin Name	I/O	Function	After Reset	Alternate Function	
P01-P03	Input/ output	Port 0 3-bit input/output port. Input/output can be specified bit-wise. When used as an input port, pull-up resistor can be connected by software.	Input	INTP1- INTP3	
P20	Input/ output	Port 2	Input	SI1	
P21		5-bit input/output port.		SO1	
P22		Input/output can be specified bit-wise.		SCK1	
P23, 24		When used as an input port, pull-up resistor can be connected by software.		—	
P30	Input/ output	Port 3	Input	—	
P31		8-bit input/output port.		TO1	
P32		Input/output can be specified bit-wise.		TO2	
P33		When used as an input port, pull-up resistor can be connected by software.		TI1	
P34				TI2	
P35				PCL	
P36				BUZ	
P37				—	
P40-P47	Input/ output	Port 4 8-bit input/output port. Input/output can be specified in 8-bit units. When used as an input port, pull-up resistor can be connected by software. Test input flag (KRIF) is set to 1 by falling edge detection.	Input	—	
P50-P53, P55-P57	Input/ output	Port 5 7-bit input/output port. LEDs can be driven directly. Input/output can be specified bit-wise. When used as an input port, pull-up resistor can be connected by software.	Input	—	
P60-P63	Input	Port 6	Input only.	Input	—
P64-P67	Input/ output	8-bit input/output port.	Input/output can be specified bit-wise. When used as an input port, pull-up resistor can be connected by software.	Input	—

3.2 Non-port Pins

Pin Name	I/O	Function	After Reset	Alternate Function
INTP1	Input	External interrupt input by which the effective edge (rising edge, falling edge, or both rising edge and falling edge) can be specified.	Input	P01
INTP2				P02
INTP3		Falling edge detection external interrupt input.		P03
SI1	Input	Serial interface serial data input.	Input	P20
SO1	Output	Serial interface serial data output.	Input	P21
SCK1	Input/output	Serial interface serial clock input/output.	Input	P22
TI1	Input	External count clock input to 8-bit timer (TM1).	Input	P33
TI2		External count clock input to 8-bit timer (TM2).		P34
TO1	Output	8-bit timer output.	Input	P31
TO2				P32
PCL	Output	Clock output (for main system clock trimming).	Input	P35
BUZ	Output	Buzzer output.	Input	P36
ANI0-ANI7	Input	A/D converter analog input.	Input	—
AVREF	Input	A/D converter reference voltage input.	—	—
AVDD	—	A/D converter analog power supply. Connected to VDD.	—	—
AVSS	—	A/D converter ground potential. Connected to VSS.	—	—
RESET	Input	System reset input.	—	—
X1	Input	Main system clock oscillation crystal connection.	—	—
X2			—	—
VDD	—	Positive power supply.	—	—
VSS	—	Ground potential.	—	—
IC	—	Internally connected. Connected to VSS directly.	—	—
NC	—	Not internally connected. Connected to VSS (Also can be left open).	—	—

3.3 Pin I/O Circuits and Recommended Connection of Unused Pins

The input/output circuit type of each pin and recommended connection of unused pins are shown in Table 3-1.


For the input/output circuit configuration of each type, see Figure 3-1.

Table 3-1. Types of Pin Input/Output Circuit

Pin Name	Input/Output Circuit Type	Input/Output	Recommended Connection when Not Used
P01/INTP1	8-A	Input/output	Independently connected to Vss through resistor.
P02/INTP2			
P03/INTP3			
ANI0-ANI7	7	Input	Connected to VDD or Vss.
P20/SI1	8-A	Input/output	Independently connected to VDD or Vss through resistor.
P21/SO1	5-A		
P22/SCK1	8-A		
P23	5-A		
P24	8-A		
P30	5-A		
P31/TO1	8-A		
P32/TO2			
P33/TI1			
P34/TI2	5-A		
P35/PCL			
P36/BUZ			
P37			
P40-P47	5-E	Input/output	Independently connected to VDD through resistor.
P50-P53	5-A	Input/output	Independently connected to VDD or Vss through resistor.
P55-P57			
P60-P63	2-B	Input	Connected to VDD or Vss.
P64-P67	5-A	Input/output	Independently connected to VDD or Vss through resistor.
RESET	2	Input	—
AVREF	—	—	Connected to Vss.
AVDD			Connected to VDD.
AVss			Connected to Vss.
IC			Connected to Vss directly.
NC			Connected to Vss (Also can be left open).

Caution The connection of the NC pin differs from that of the PROM version (μ PD78P018F).


Figure 3-1. Pin Input/Output Circuits

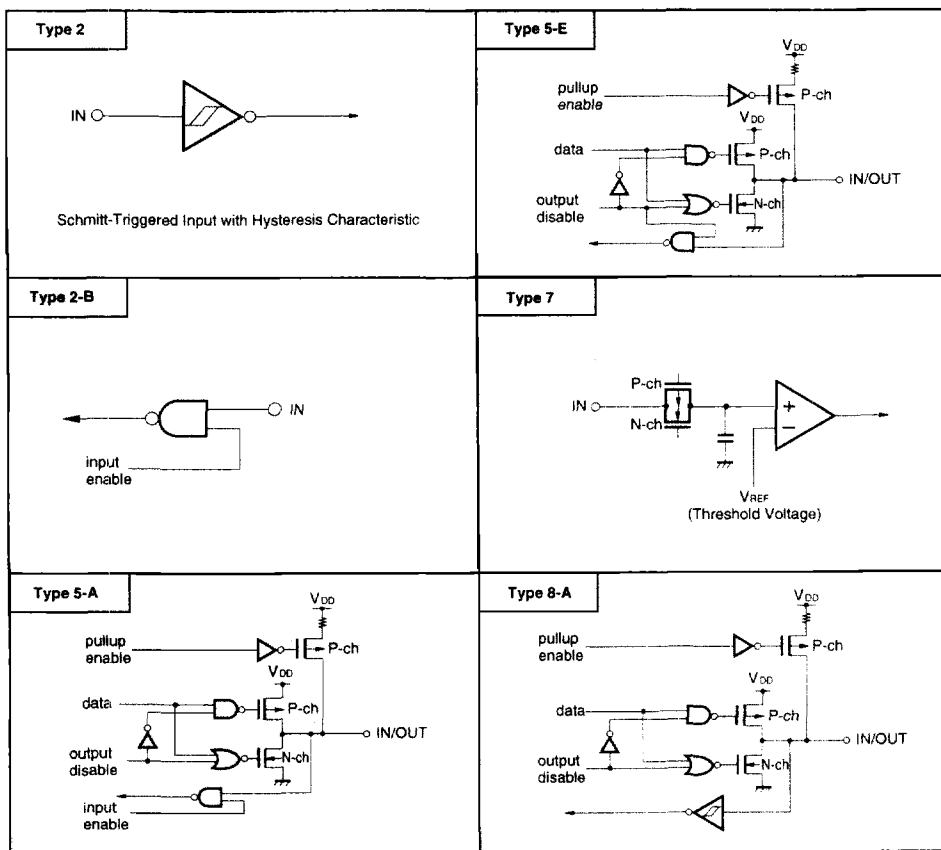

4. MEMORY SPACE

The memory map of the μPD780001 is shown in Figure 4-1.

Figure 4-1. Memory Map

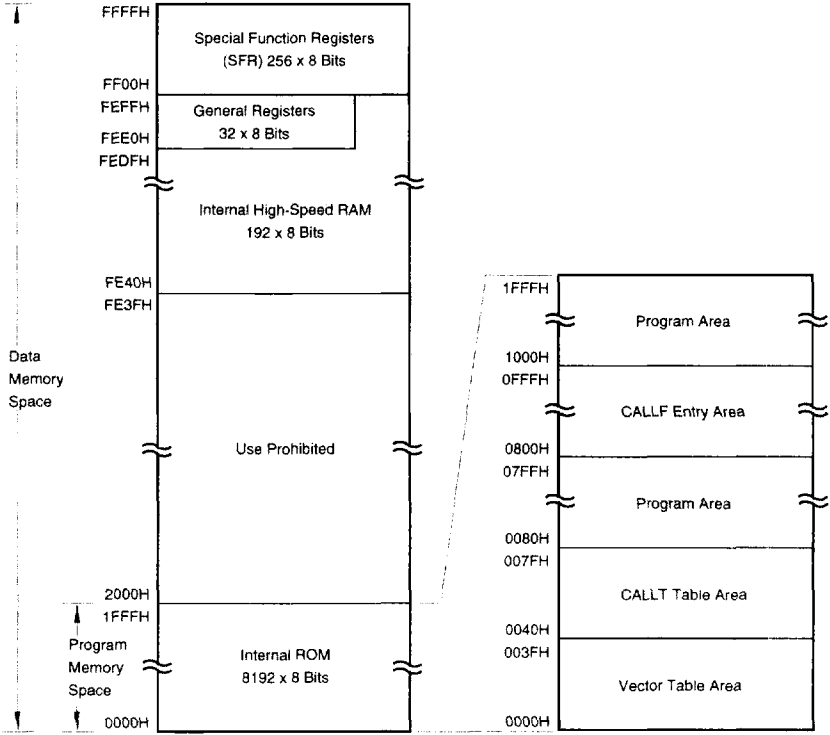

5. PERIPHERAL HARDWARE FUNCTION FEATURES

5.1 Ports

The following two types of I/O ports are provided.

- CMOS input (P60-P63) : 4
 - CMOS input/output (port 0, port 2-port 5, P64-P67) : 35
-
- Total : 39

Table 5-1. Functions of Ports

Port Name	Pin Name	Function
Port 0	P01-P03	Input/output ports. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be connected by software.
Port 2	P20-P24	Input/output ports. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be connected by software.
Port 3	P30-P37	Input/output ports. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be connected by software.
Port 4	P40-P47	Input/output ports. Input/output can be specified in 8-bit units. When used as an input port, on-chip pull-up resistor can be connected by software. Test input flag (KRIF) is set to 1 by falling edge detection.
Port 5	P50-P53, P55-P57	Input/output ports. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be connected by software. LEDs can be driven directly.
Port 6	P60-P63	Input-only port.
	P64-P67	Input/output ports. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be connected by software.


5.2 Clock Generator

An on-chip main system clock generator is provided.

The instruction execution time can be changed.

- 0.4 μ s/0.8 μ s/1.6 μ s/3.2 μ s/6.4 μ s (Main system clock: at 10.0-MHz operation)

Figure 5-1. Clock Generator Block Diagram

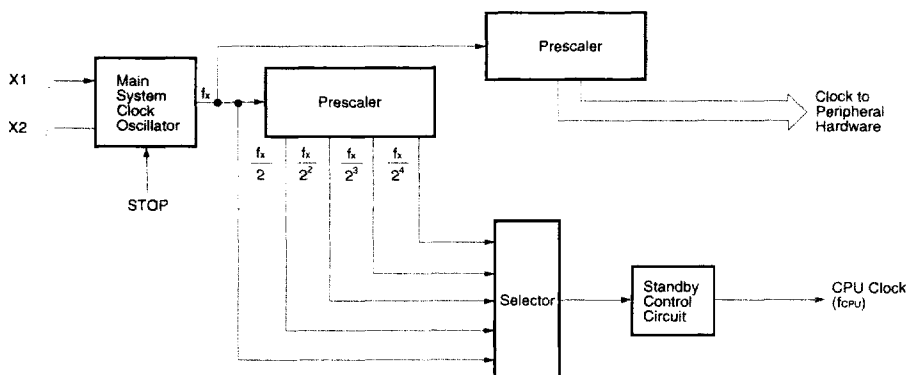

5.3 Timer/Event Counter

The following three channels are incorporated in the timer/event counter.

- 8-bit timer/event counter : 2 channels
- Watchdog timer : 1 channel

Table 5-2. Types and Functions of Timer/Event Counter

		8-bit Timer/Event Counter	Watchdog Timer
Type	Interval timer	2 channels	1 channel
	External event counter	2 channels	—
Functions	Timer output	2 outputs	—
	Square wave output	2 outputs	—
	Interrupt request	2	1

Figure 5-2. 8-bit Timer/Event Counter Block Diagram

★


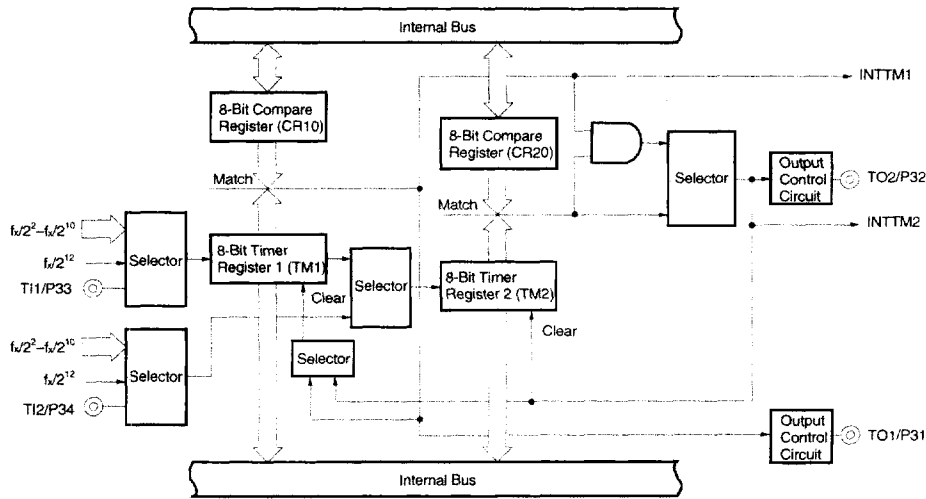


Figure 5-3. Watchdog Timer Block Diagram

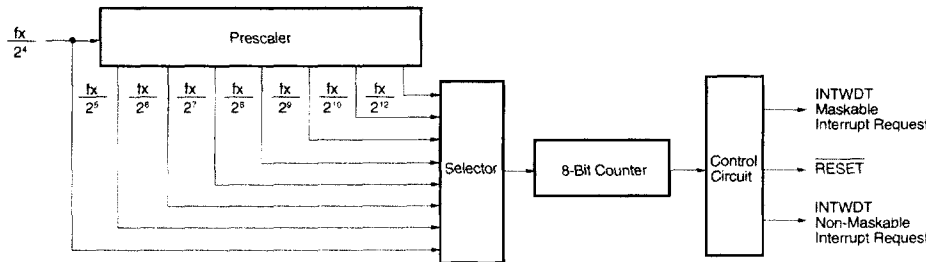


5.4 Clock Output Control Circuit

The clock with the following frequencies can be output for clock output.

- 39.1 kHz/78.1 kHz/156 kHz/313 kHz/625 kHz/1.25 MHz (Main system clock: at 10.0-MHz operation)

Figure 5-4. Clock Output Control Circuit Block Diagram

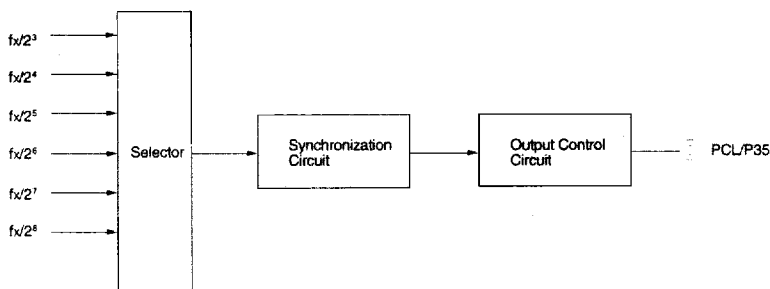


5.5 Buzzer Output Control Circuit

A clock with the following frequencies can be output for buzzer output.

- 2.4 kHz/4.9 kHz/9.8 kHz (Main system clock: at 10.0-MHz operation)

Figure 5-5. Buzzer Output Control Circuit Block Diagram

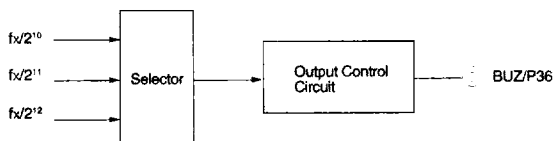


5.6 A/D Converter

The A/D converter has on-chip eight 8-bit resolution channels.

There are the following two methods to start A/D conversion.

- Hardware starting
- Software starting

Figure 5-6. A/D Converter Block Diagram

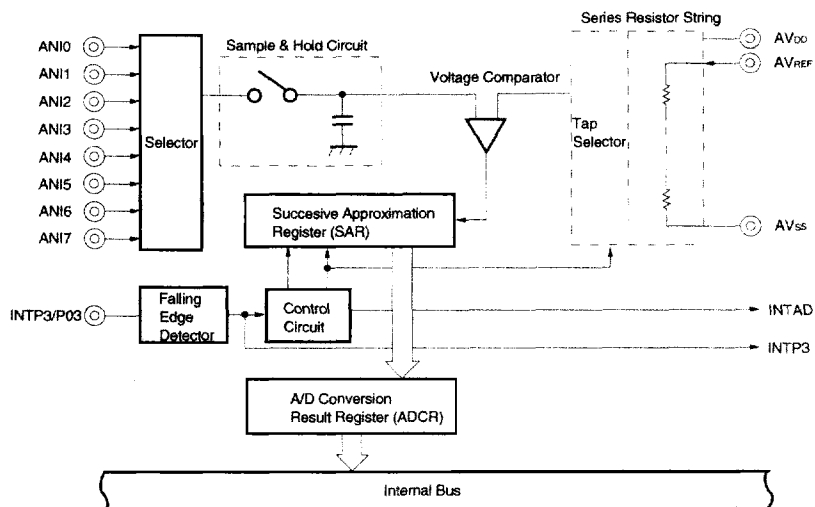


5.7 Serial Interface

One on-chip clocked serial interface is provided.

Serial interface channel 1 operates in MSB/LSB-first switchable 3-wire serial I/O mode.

Figure 5-7. Serial Interface Channel 1 Block Diagram

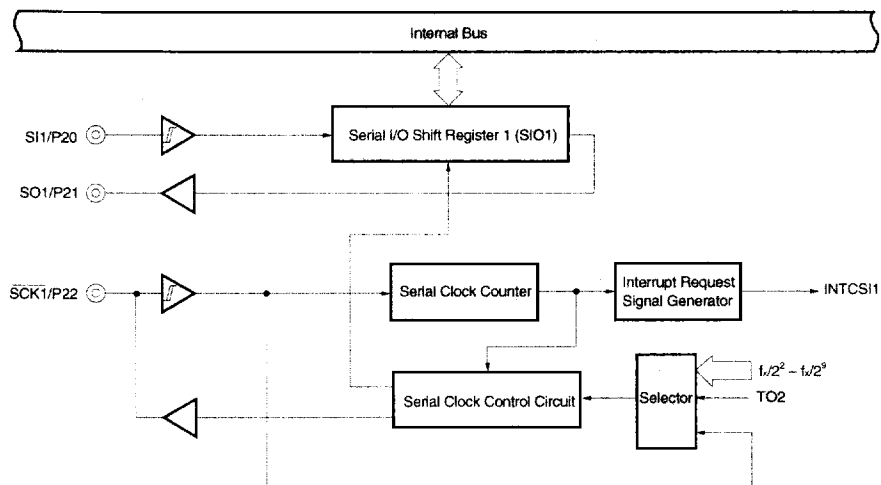

6. INTERRUPT FUNCTIONS AND TEST FUNCTION

6.1 Interrupt Functions

There are 10 interrupt functions of 3 different kinds as shown below.

- Non-maskable interrupt : 1
- Maskable interrupts : 8
- Software interrupt : 1

Table 6-1. Interrupt Source List


Interrupt Type	Default Priority ^{Note 1}	Interrupt Source		Internal/ External	Vector Table Address	Basic ^{Note 2} Configuration Type
		Name	Trigger			
Non-maskable	—	INTWDT	Watchdog timer overflow (with watchdog timer mode 1 selected)	Internal	0004H	(A)
Maskable	0	INTWDT	Watchdog timer overflow (with interval timer mode selected)			(B)
	1	INTP1	Pin input edge detection	External	0008H	(C)
	2	INTP2			000AH	
	3	INTP3			000CH	
	4	INTCSI1	Serial interface channel 1 transfer end	Internal	0010H	(B)
	5	INTTM1	8-bit timer/event counter 1 match signal generation		0016H	
	6	INTTM2	8-bit timer/event counter 2 match signal generation		0018H	
	7	INTAD	A/D converter conversion end		001AH	
Software	—	BRK	BRK instruction execution	Internal	003EH	(D)

Notes 1. The default priority is the priority applicable when more than one maskable interrupt is generated. 0 is the highest priority and 7, the lowest.


2. Basic configuration types (A) - (D) correspond to those on Figure 6-1.

Figure 6-1. Interrupt Function Basic Configuration (1/2)

(A) Internal Non-Maskable Interrupt

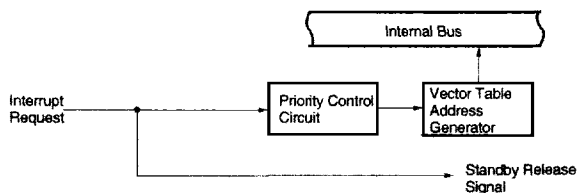

(B) Internal Maskable Interrupt

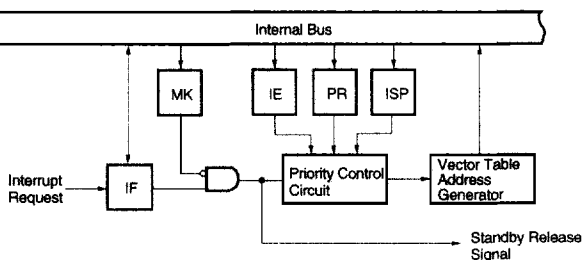

(C) External Maskable Interrupt


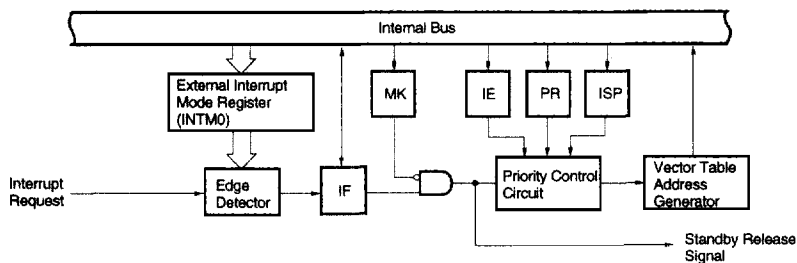


Figure 6-1. Interrupt Function Basic Configuration (2/2)

(D) Software Interrupt

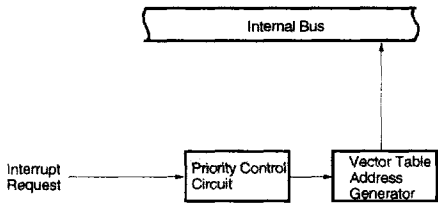


- IF : Interrupt request flag
- IE : Interrupt enable flag
- ISP : In-service priority flag
- MK : Interrupt mask flag
- PR : Priority specification flag

6.2 Test Function

The following one test function is provided.

Test Source		Internal/External
Name	Trigger	
INTPT4	Port 4 falling edge detection	External

Figure 6-2. Test Function Basic Configuration

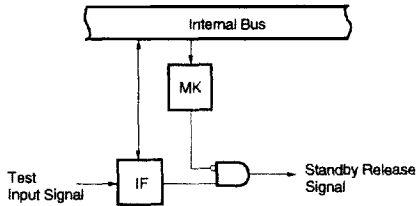


- IF : Test input flag
- MK : Test mask flag

7. STANDBY FUNCTIONS

There are the following two standby functions to reduce the current consumption.

- **HALT mode** : The CPU operating clock is stopped. The average current consumption can be reduced by intermittent operation in combination with the normal operating mode.
- **STOP mode** : The main system clock oscillation is stopped. The whole operation by the main system clock is stopped, so that the system operates with ultra-low power dissipation.

Figure 7-1. Standby Functions

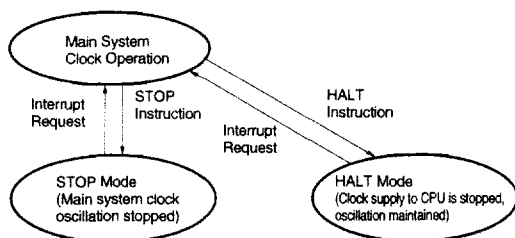

8. RESET FUNCTIONS

There are the following two reset methods.

- External reset input by $\overline{\text{RESET}}$ pin.
- Internal reset by watchdog timer runaway time detection.

9. INSTRUCTION SET

(1) 8-Bit Instruction

MOV, XCH, ADD, ADDC, SUB, SUBC, AND, OR, XOR, CMP, MULU, DIVUW, INC, DEC, ROR, ROL, RORC, ROLC, ROR4, ROL4, PUSH, POP, DBNZ

2nd Operand	#byte	A	Note	sfr	saddr	laddr16	PSW	[DE]	[HL]	[HL+byte] [HL+B] [HL+C]	\$addr16	1	None
A	ADD ADDC SUB SUBC AND OR XOR CMP	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP		ROR ROL RORC ROLC	
r	MOV ADD ADDC SUB SUBC AND OR XOR CMP	MOV ADD ADDC SUB SUBC AND OR XOR CMP											INC DEC
r1											DBNZ		
sfr	MOV MOV	MOV MOV											
saddr	MOV ADD ADDC SUB SUBC AND OR XOR CMP	MOV MOV									DBNZ		INC DEC
laddr16		MOV											
PSW	MOV MOV	MOV MOV											PUSH POP
[DE]		MOV											
[HL]		MOV											ROR4 ROL4
[HL+byte] [HL+B] [HL+C]		MOV											
X													MULU
C													DIVUW

Note Except r=A

(2) 16-Bit Instruction

MOVW, XCHW, ADDW, SUBW, CMPW, PUSH, POP, INCW, DECW

2nd Operand 1st Operand	#word	AX	rp ^{Note}	sfrp	saddrp	laddr16	SP	None
AX	ADDW SUBW CMPW		MOVW XCHW	MOVW	MOVW	MOVW	MOVW	
rp	MOVW	MOVW ^{Note}						INCW, DECW PUSH, POP
sfrp	MOVW	MOVW						
saddrp	MOVW	MOVW						
laddr16		MOVW						
SP	MOVW	MOVW						

Note Only when rp=BC, DE, HL.

(3) Bit Manipulation Instruction

MOV1, AND1, OR1, XOR1, SET1, CLR1, NOT1, BT, BF, BTCLR

2nd Operand 1st Operand	A.bit	sfr.bit	saddr.bit	PSW.bit	[HL].bit	CY	\$addr16	None
A.bit						MOV1	BT BF BTCLR	SET1 CLR1
sfr.bit						MOV1	BT BF BTCLR	SET1 CLR1
saddr.bit						MOV1	BT BF BTCLR	SET1 CLR1
PSW.bit						MOV1	BT BF BTCLR	SET1 CLR1
[HL].bit						MOV1	BT BF BTCLR	SET1 CLR1
CY	MOV1 AND1 OR1 XOR1	MOV1 AND1 OR1 XOR1	MOV1 AND1 OR1 XOR1	MOV1 AND1 OR1 XOR1	MOV1 AND1 OR1 XOR1			SET1 CLR1 NOT1

(4) Call Instruction/Branch Instruction

CALL, CALLF, CALLT, BR, BC, BNC, BZ, BNZ, BT, BF, BTCLR, DBNZ

2nd Operand 1st Operand	AX	laddr16	laddr11	[addr5]	\$addr16
Basic instruction	BR	CALL, BR	CALLF	CALLT	BR, BC, BNC, BZ, BNZ
Compound instruction					BT, BF, BTCLR, DBNZ

(5) Other Instruction

ADJBA, ADJBS, BRK, RET, RETI, RETB, SEL, NOP, EI, DI, HALT, STOP

10. ELECTRICAL SPECIFICATIONS

*

Absolute Maximum Ratings (T_A = 25 °C)

Parameter	Symbol	Test Conditions	Ratings	Unit	
Supply voltage	V _{DD}		−0.3 to +7.0	V	
	AV _{DD}		−0.3 to V _{DD} +0.3	V	
	AV _{REF}		−0.3 to V _{DD} +0.3	V	
	AV _{SS}		−0.3 to +0.3	V	
Input voltage	V _I	P01-P03, P20-P24, P30-P37, P40-P47, P50-P53, P55-P57, P60-P67, X1, X2	−0.3 to V _{DD} +0.3	V	
Output voltage	V _O		−0.3 to V _{DD} +0.3	V	
Analog input voltage	V _{AN}	ANI0-ANI7 Analog input pins	AV _{SS} − 0.3 to AV _{REF} + 0.3	V	
Output current, high	I _{OH}	Per pin	−10	mA	
		Total for P20-P24, P30-P37	−15	mA	
		Total for P01-P03, P40-P47, P50-P53, P55-P57, P64-P67	−15	mA	
Output current, low	I _{OL} Note	Per pin	Peak value	30	mA
			r.m.s. value	15	mA
		Total for P40-P47, P50-P53, P55	Peak value	100	mA
			r.m.s. value	70	mA
		Total for P01-P03, P56, P57, P64-P67	Peak value	100	mA
			r.m.s. value	70	mA
		Total for P01-P03, P64-P67	Peak value	50	mA
			r.m.s. value	20	mA
		Total for P20-P24, P30-P37	Peak value	50	mA
			r.m.s. value	20	mA
Operating ambient temperature	T _A		−40 to +85	°C	
Storage temperature	T _{Opt}		−65 to +150	°C	

Note The r.m.s. value should be calculated as follows: [r.m.s. value] = [Peak value] × √Duty




Caution Exposure to Absolute Maximum Ratings for extended periods may affect device reliability; exceeding the ratings could cause permanent damage. The parameters apply independently. The device should be operated within the limits specified.

Capacitance (T_A = 25 °C, V_{DD} = V_{SS} = 0 V)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Input capacitance	C _{IN}	f = 1 MHz, unmeasured pins returned to 0 V.			15	pF
I/O capacitance	C _{IO}	f = 1 MHz, unmeasured pins returned to 0 V.			15	pF
		P01-P03, P20-P24, P30-P37, P40-P47, P50-P53, P55-P57, P64-P67				

Remark Unless otherwise specified, dual-function pin characteristics are the same as port pin characteristics.

Main System Clock Oscillator Characteristics ($T_A = -40$ to $+85$ °C, $V_{DD} = 2.7$ to 5.5 V)

Resonator	Recommended Circuit	Parameter	Test Conditions	MIN.	TYP.	MAX.	Unit
Ceramic resonator		Oscillation frequency (f_x) ^{Note 1}	V_{DD} = Oscillation voltage range	1		10	MHz
		Oscillation stabilization time ^{Note 2}	After V_{DD} came to MIN. of oscillation voltage range			4	ms
Crystal resonator		Oscillation frequency (f_x) ^{Note 1}		1	8.38	10	MHz
		Oscillation stabilization time ^{Note 2}	$V_{DD} = 4.5$ to 5.5 V			10	ms
External clock		X1 input frequency (f_x) ^{Note 1}		1.0		10.0	MHz
		X1 input high- and low-level widths (t_{H1} , t_{L1})		42.5		500	ns

- Notes** 1. Only the oscillator characteristics are shown. For the instruction execution time, refer to AC Characteristics.
 2. Time required for oscillation to stabilize after a reset or the STOP mode has been released.

Caution When using the oscillation circuit of the main system clock, wire the portion enclosed in dotted lines in the figures as follows to avoid adverse influences on the wiring capacitance:

- Keep the wiring length as short as possible.
- Do not cross the wiring over other signal lines.
- Do not route the wiring in the vicinity of lines through which a high fluctuating current flows.
- Always keep the ground point of the capacitor of the oscillation circuit at the same potential as V_{SS} .
- Do not connect the power source to a ground pattern through which a high current flows.
- Do not extract signals from the oscillation circuit.

DC Characteristics ($T_A = -40$ to $+85$ °C, $V_{DD} = 2.7$ to 5.5 V)

Parameter	Symbol	Test Conditions		MIN.	TYP.	MAX.	Unit
Input voltage, high	V_{IH1}	P21, P23, P30-P32, P35-P37, P40-P47, P50-P53, P55-57, P60-P67		$0.7V_{DD}$		V_{DD}	V
	V_{IH2}	P01-P03, P20, P22, P24, P33, P34, RESET		$0.8V_{DD}$		V_{DD}	V
	V_{IH3}	X1, X2		$V_{DD}-0.5$		V_{DD}	V
Input voltage, low	V_{IL1}	P21, P23, P30-P32, P35-P37, P40-P47, P50-P53, P55-57, P60-P67		0		$0.3V_{DD}$	V
	V_{IL2}	P01-P03, P20, P22, P24, P33, P34, RESET		0		$0.2V_{DD}$	V
	V_{IL3}	X1, X2		0		0.4	V
Output voltage, high	V_{OH}	$V_{DD} = 4.5$ to 5.5 V, $I_{OH} = -1$ mA		$V_{DD}-1.0$			V
		$I_{OH} = -100$ μ A		$V_{DD}-0.5$			V
Output voltage, low	V_{OL1}	P50-P53, P55-P57	$V_{DD} = 4.5$ to 5.5 V, $I_{OL} = 15$ mA		0.4	2.0	V
		P01-P03, P20-24, P30-P37, P40-P47, P64-P67	$V_{DD} = 4.5$ to 5.5 V, $I_{OL} = 1.6$ mA			0.4	V
		$I_{OL} = 400$ μ A				0.5	V
Input leakage current, high	I_{IH1}	$V_{IN} = V_{DD}$	P01-P03, P20-24, P30-P37, P40-P47, P50-P53, P55-P57, P60-P67, ANI0-ANI7, RESET			3	μ A
	I_{IH2}		X1, X2			20	μ A
Input leakage current, low	I_{IL1}	$V_{IN} = 0$ V	P01-P03, P20-24, P30-P37, P40-P47, P50-P53, P55-P57, P60-P67, ANI0-ANI7, RESET			-3	μ A
	I_{IL2}		X1, X2			-20	μ A
Output leakage current, high	I_{LOH}	$V_{OUT} = V_{DD}$				3	μ A
Output leakage current, low	I_{LOL}	$V_{OUT} = 0$ V				-3	μ A
Software pull-up resistance	R	$V_{IN} = 0$ V, P20-P24, P30-P37, P40-P47, P50-P53, P55-P57, P64-P67	$4.5 \leq V_{DD} \leq 5.5$ V	15	40	90	k Ω
			$2.7 \leq V_{DD} < 4.5$ V	20		500	k Ω

Remark Unless otherwise specified, dual-function pin characteristics are the same as port pin characteristics.

DC Characteristics ($T_A = -40$ to $+85$ °C, $V_{DD} = 2.7$ to 5.5 V)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Supply current ^{Note 1}	I _{DD1}	8.38-MHz crystal oscillation operating mode	$V_{DD} = 5.0\text{ V} \pm 10\%$ ^{Note 2}	6.5	19.5	mA
			$V_{DD} = 3.0\text{ V} \pm 10\%$ ^{Note 3}	0.7	2.1	mA
	I _{DD2}	8.38-MHz crystal oscillation HALT mode	$V_{DD} = 5.0\text{ V} \pm 10\%$	1.4	4.2	mA
			$V_{DD} = 3.0\text{ V} \pm 10\%$	550	1650	μA
	I _{DD3}	STOP mode	$V_{DD} = 5.0\text{ V} \pm 10\%$	0.1	20	μA
			$V_{DD} = 3.0\text{ V} \pm 10\%$	0.05	10	μA

Notes 1. Not including AV_{REF} current and port current.

2. High-speed mode operation (when processor clock control register (PCC) is set to 00H).

3. Low-speed mode operation (when PCC is set to 04H).

Remark Unless otherwise specified, dual-function pin characteristics are the same as port pin characteristics.

AC Characteristics (TA = -40 to +85 °C, VDD = 2.7 to 5.5 V)

(1) Basic Operation



Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Cycle time (minimum instruction execution time)	TCY	VDD = 4.5 to 5.5 V	0.4		64	μs
			0.96		64	μs
T11, T12 input frequency	fT1	VDD = 4.5 to 5.5 V	0		4	MHz
			0		275	kHz
T11, T12 input high-/low-level width	tTH, tTL	VDD = 4.5 to 5.5 V	100			ns
			1.8			μs
Interrupt input high-/low-level width	tINTH, tINTL	INTP1-INTP3	10			μs
		KR0-KR7	10			μs
RESET low-level width	tASL		10			μs

μPD780001

μPD78P018F (Reference)

TCY vs VDD (Main System Clock Operation)

TCY vs VDD (Main System Clock Operation)

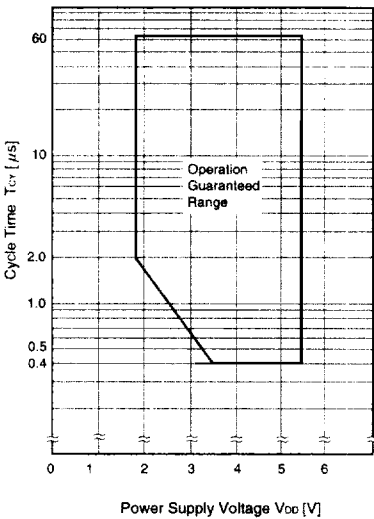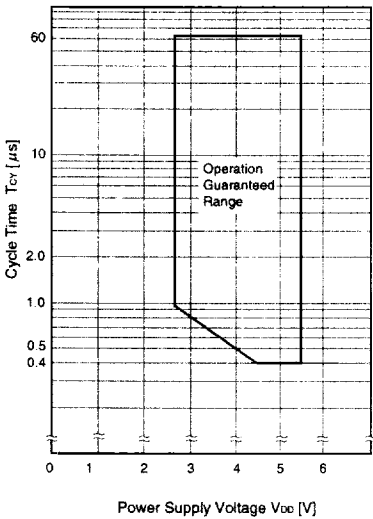

Caution The operation guaranteed range of the μPD780001 is different from that of the μPD78P018F.

(2) Serial Interface ($T_A = -40$ to $+85$ °C, $V_{DD} = 2.7$ to 5.5 V)

(a) 3-wire serial I/O mode (SCK1 ... internal clock output)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
SCK1 cycle time	t_{CKY1}	$V_{DD} = 4.5$ to 5.5 V	800			ns
			1600			ns
SCK1 high-/low-level width	$t_{KH1},$	$V_{DD} = 4.5$ to 5.5 V	$t_{CKY1}/2-50$			ns
	t_{KL1}					ns
SI1 setup time (to SCK1 ↑)	t_{SIK1}	$V_{DD} = 4.5$ to 5.5 V	100			ns
			150			ns
SI1 hold time (from SCK1 ↑)	t_{KSI1}		400			ns
SCK1 ↓ → SO1 output delay time	t_{KSO1}	$C = 100$ pF ^{Note}			300	ns


Note C is the SO1 output line load capacitance.

(b) 3-wire serial I/O mode (SCK1 ... external clock input)


Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
SCK1 cycle time	t_{CKY2}	$V_{DD} = 4.5$ to 5.5 V	800			ns
			1600			ns
SCK1 high-/low-level width	$t_{KH2},$	$V_{DD} = 4.5$ to 5.5 V	400			ns
	t_{KL2}		800			ns
SI1 setup time (to SCK1 ↑)	t_{SIK2}		100			ns
						ns
SI1 hold time (from SCK1 ↑)	t_{KSI2}		400			ns
SCK1 ↓ → SO1 output delay time	t_{KSO2}	$C = 100$ pF ^{Note}			300	ns
SCK1 rise, fall time	t_R, t_F	$V_{DD} = 4.5$ to 5.5 V			1000	ns

Note C is the SO1 output line load capacitance.


AC Timing Test Point (Excluding X1 Input)



Clock Timing

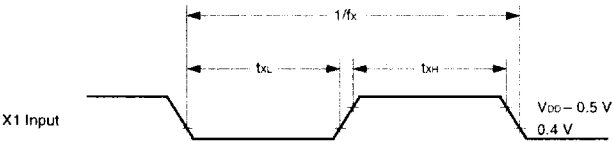


T1 Timing

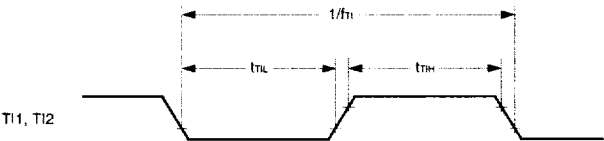

Serial Transfer Timing

3-wire serial I/O mode:

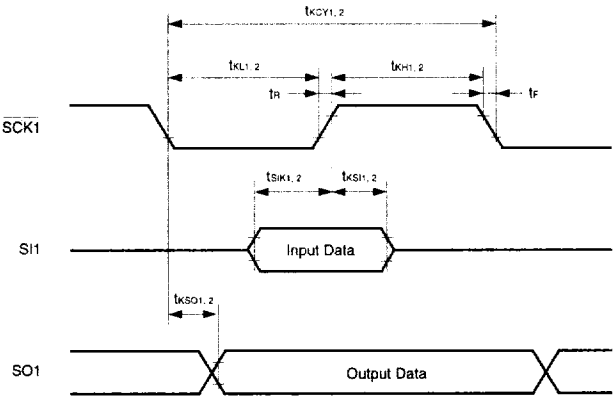

A/D Converter Characteristics ($T_A = -40$ to $+85$ °C, $AV_{DD} = V_{DD} = 4.2$ to 5.5 V, $AV_{SS} = V_{SS} = 0$ V)
($T_A = -10$ to $+85$ °C, $AV_{DD} = V_{DD} = 4.0$ to 5.5 V, $AV_{SS} = V_{SS} = 0$ V)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Resolution			8	8	8	bit
Total error ^{Note}					0.6	%
Conversion time	t_{CONV}		19.1		200	μs
Sampling time	t_{SAMP}		24/ f_x			μs
Analog input voltage	V_{IAN}		AV_{SS}		AV_{REF}	V
Reference voltage	AV_{REF}		2.7		AV_{DD}	V
AV_{REF} - AV_{SS} resistance	RA_{REF}		4	14		kΩ


Note Excluding quantization error ($\pm 1/2$ LSB). Shown as a percentage of the full scale value.

Data Memory STOP Mode Low Supply Voltage Data Retention Characteristics ($T_A = -40$ to $+85$ °C)


Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Data retention supply voltage	V_{DDDR}		2.0		5.5	V
Data retention supply current	I_{DDDR}	$V_{DDDR} = 2.0$ V		0.1	10	μA
Release signal setup time	t_{SREL}		0			μs
Oscillation stabilization wait time	t_{WAIT}	Release by RESET		2 ¹⁹ / f_x		ms
		Release by interrupt		Note		ms

Note 2¹³/ f_x or 2¹⁵/ f_x -2¹⁸/ f_x can be selected by bit 0-bit 2 (OSTS0-OSTS2) of oscillation stabilization time selection register (OSTS).


Data Retention Timing (STOP mode released by RESET)

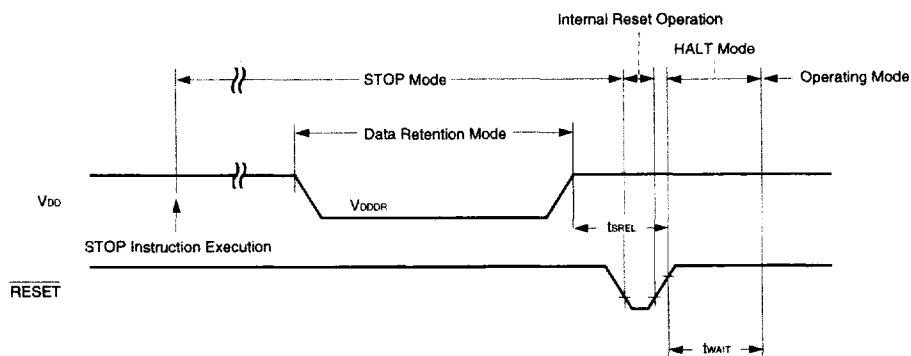


Data Retention Timing (Standby release signal: STOP mode released by interrupt signal)

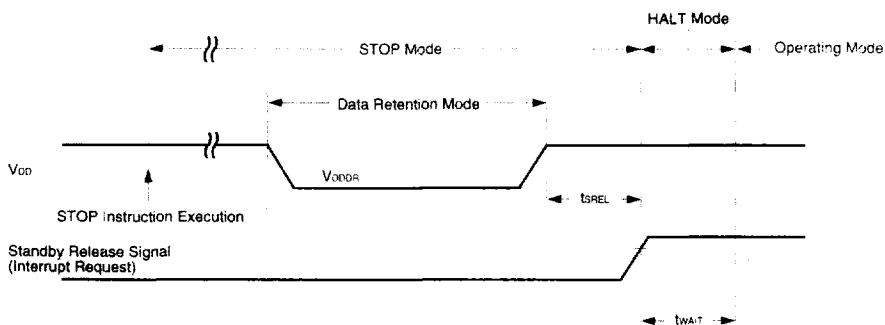

Interrupt Input Timing

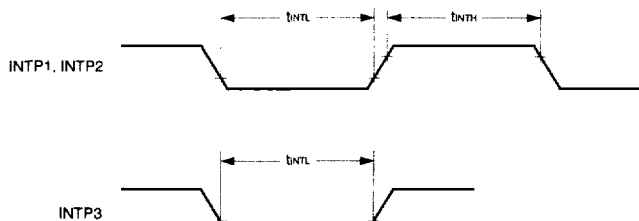


RESET Input Timing



11. PACKAGE DRAWINGS

64 PIN PLASTIC SHRINK DIP (750 mil)

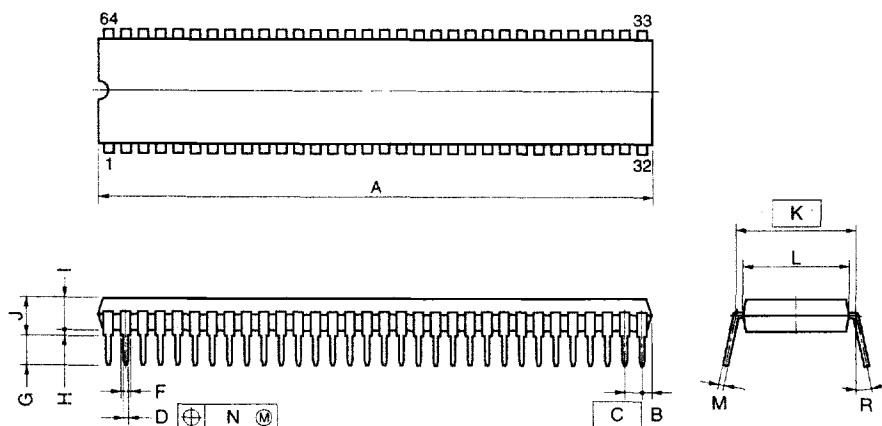

NOTE


- Each lead centerline is located within 0.17 mm (0.007 inch) of its true position (T.P.) at maximum material condition.
- Item "K" to center of leads when formed parallel.

ITEM	MILLIMETERS	INCHES
A	58.68 MAX.	2.311 MAX.
B	1.78 MAX.	0.070 MAX.
C	1.778 (T.P.)	0.070 (T.P.)
D	0.50±0.10	0.020 ^{+0.004} _{-0.005}
F	0.9 MIN.	0.035 MIN.
G	3.2±0.3	0.126±0.012
H	0.51 MIN.	0.020 MIN.
I	4.31 MAX.	0.170 MAX.
J	5.08 MAX.	0.200 MAX.
K	19.05 (T.P.)	0.750 (T.P.)
L	17.0	0.669
M	0.25 ^{+0.10} _{-0.05}	0.010 ^{+0.004} _{-0.003}
N	0.17	0.007
R	0-15°	0-15°

P64C-70-750A,C-1

Remark The shape and material of the ES product is the same as those of the mass-produced product.

64 PIN PLASTIC QFP (□14)

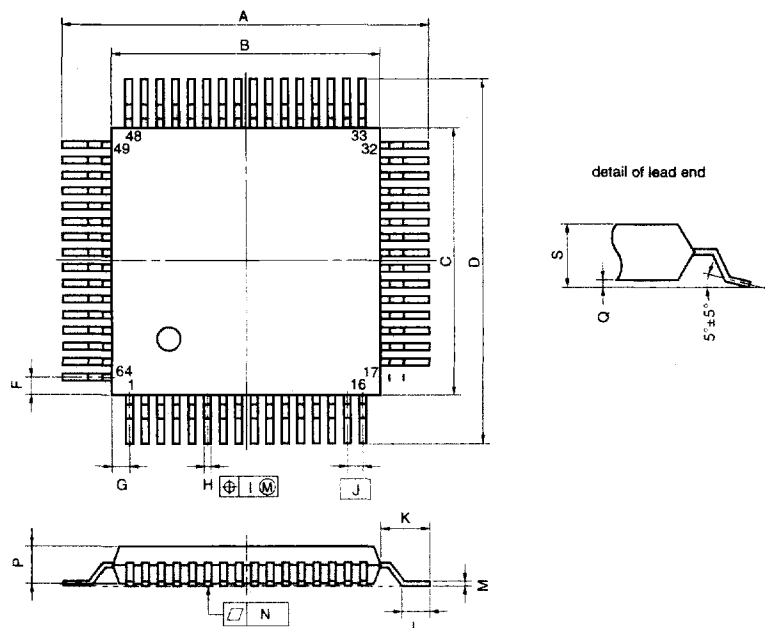

NOTE

Each lead centerline is located within 0.15 mm (0.006 inch) of its true position (T.P.) at maximum material condition.

P64GC-80-AB8-3

ITEM	MILLIMETERS	INCHES
A	17.6±0.4	0.693±0.016
B	14.0±0.2	0.551 ^{+0.009} _{-0.008}
C	14.0±0.2	0.551 ^{+0.009} _{-0.008}
D	17.6±0.4	0.693±0.016
F	1.0	0.039
G	1.0	0.039
H	0.35±0.10	0.014 ^{+0.004} _{-0.005}
I	0.15	0.006
J	0.8 (T.P.)	0.031 (T.P.)
K	1.8±0.2	0.071±0.008
L	0.8±0.2	0.031 ^{+0.009} _{-0.008}
M	0.15 ^{+0.10} _{-0.05}	0.006 ^{+0.004} _{-0.003}
N	0.10	0.004
P	2.55	0.100
Q	0.1±0.1	0.004±0.004
S	2.85 MAX.	0.112 MAX.

Remark The shape and material of the ES product is the same as those of the mass-produced product.

★ 12. RECOMMENDED SOLDERING CONDITIONS

It is recommended that the μPD780001 be soldered under the following conditions.

For details on the recommended soldering conditions, refer to information document "Semiconductor Device Mounting Technology Manual" (IEI-1207).

For soldering methods and conditions other than those recommended, please contact an NEC sales representative.

Table 12-1. Surface Mount Type Soldering Conditions

μPD780001GC-XXX-AB8: 64-pin plastic QFP (14 × 14 mm)

Soldering Method	Soldering Conditions	Symbol
Infrared ray reflow	Package peak temperature: 235°C, Time: 30 seconds max. (210°C min.), Number of times: 2 max. < Cautions > (1) Wait for the device temperature to return to normal after the first reflow before starting the second reflow. (2) Do not perform flux cleaning with water after the first reflow.	IR35-00-2
VPS	Package peak temperature: 215°C, Time: 40 seconds max. (200°C min.), Number of times: 2 max. < Cautions > (1) Wait for the device temperature to return to normal after the first reflow before starting the second reflow. (2) Do not perform flux cleaning with water after the first reflow.	VP15-00-2
Wave soldering	Solder temperature: 260°C max., Time: 10 seconds max., Number of times: 1, Preheating temperature: 120 °C max. (package surface temperature)	WS60-00-1
Partial heating	Pin temperature: 300°C max. Time: 3 seconds max. (per device side)	—

Caution Do not use different soldering methods together (except for partial heating method).

Table 12-2. Through-Hole Type Soldering Conditions

μPD780001CW-XXX: 64-pin plastic shrink DIP (750 mil)

Soldering Method	Soldering Conditions
Wave soldering (pin only)	Solder temperature: 260°C max., Time: 10 seconds max.
Partial heating	Pin temperature: 300°C max., Time: 3 seconds max. (per pin)

Caution Apply wave soldering only to the pins and be careful so as not to bring solder into direct contact with the package.