


CMLT6427E

**ENHANCED SPECIFICATION
SURFACE MOUNT, PICOmini™
SILICON NPN DARLINGTON
TRANSISTOR**

**Central™
Semiconductor Corp.**

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMLT6427E is an Enhanced Specification, **PICOmini™**, NPN Silicon Darlington Transistor. High DC Current gains, coupled with a Low Saturation Voltage, make this an excellent choice for industrial/consumer applications where operational efficiency and small size are top priority.

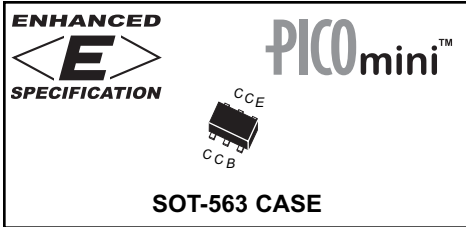

MARKING CODE : C64

FEATURES:

APPLICATIONS:

- MOTOR DRIVERS
- RELAY DRIVERS
- PRE-AMPLIFIER INPUT APPLICATIONS
- VOLTAGE REGULATOR CONTROLS

- HIGH CURRENT (500mA MAX)
- HIGH DC CURRENT GAIN (15K MIN)
- LOW SATURATION VOLTAGE ($V_{CE(SAT)} = 0.8V$ MAX)
- HIGH INPUT IMPEDANCE
- **PICOmini™** SOT-563 SURFACE MOUNT PACKAGE

MAXIMUM RATINGS: ($T_A = 25^\circ C$)

	SYMBOL		UNITS
◆ Collector-Base Voltage	V_{CBO}	60	V
◆ Collector-Emitter Voltage	V_{CES}	60	V
Collector-Emitter Voltage	V_{CEO}	40	V
Emitter-Base Voltage	V_{EBO}	12	V
Continuous Collector Current	I_C	500	mA
Power Dissipation	P_D	350	mW (Note 1)
Power Dissipation	P_D	300	mW (Note 2)
Power Dissipation	P_D	150	mW (Note 3)
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +150	°C
Thermal Resistance	θ_{JA}	357	°C/W (Note 1)

ELECTRICAL CHARACTERISTICS: ($T_A = 25^\circ C$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_{CBO}	$V_{CB} = 30V$			100	nA
◆ I_{CEO}	$V_{CE} = 25V$			100	nA
I_{EBO}	$V_{BE} = 10V$			100	nA
◆ BV_{CBO}	$I_C = 100\mu A$	60			V
◆ BV_{CES}	$I_C = 100\mu A$	60			V
BV_{CEO}	$I_C = 10mA$	40			V

◆ Enhanced Specification

Notes: (1) Ceramic or aluminum core PC Board with copper mounting pad area of 4.0 mm²
 (2) FR-4 Epoxy PC Board with copper mounting pad area of 4.0 mm²
 (3) FR-4 Epoxy PC Board with copper mounting pad area of 1.4 mm²

R0 (18-October 2005)


ENHANCED SPECIFICATION
SURFACE MOUNT, PICOminiTM
SILICON NPN DARLINGTON
TRANSISTOR

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
◆ BV_{EBO}	$I_E=10\mu\text{A}$	14			V
◆ $V_{CE(SAT)}$	$I_C=50\text{mA}, I_B=0.5\text{mA}$			0.80	V
$V_{CE(SAT)}$	$I_C=100\text{mA}, I_B=0.1\text{mA}$			0.85	V
◆ $V_{CE(SAT)}$	$I_C=500\text{mA}, I_B=0.5\text{mA}$			1.0	V
$V_{BE(SAT)}$	$I_C=500\text{mA}, I_B=0.5\text{mA}$			2.00	V
$V_{BE(ON)}$	$V_{CE}=5.0\text{V}, I_C=50\text{mA}$			1.75	V
◆ h_{FE}	$V_{CE}=5.0\text{V}, I_C=10\text{mA}$	15K		100K	
◆ h_{FE}	$V_{CE}=5.0\text{V}, I_C=100\text{mA}$	25K		200K	
◆ h_{FE}	$V_{CE}=5.0\text{V}, I_C=500\text{mA}$	15K		140K	
f_T	$V_{CE}=5.0\text{V}, I_C=10\text{mA}, f=100\text{MHz}$		200		MHz
C_{ob}	$V_{CB}=10\text{V}, I_E=0, f=1.0\text{MHz}$			7.0	pF
C_{ib}	$V_{BE}=0.5\text{V}, I_C=0, f=1.0\text{MHz}$			15	pF
NF	$V_{CE}=5.0\text{V}, I_C=1.0\text{mA}, R_S=100\text{k}\Omega, f=1.0\text{kHz TO } 15.7\text{kHz}$			10	dB

◆ Enhanced Specification

SOT-563 CASE - MECHANICAL OUTLINE

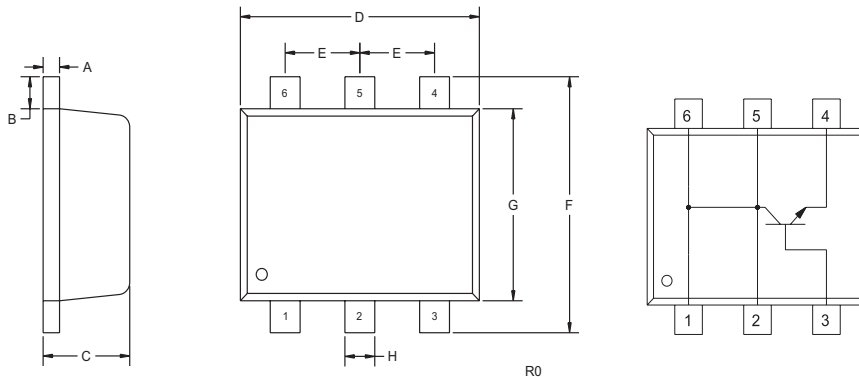

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.004	0.007	0.10	0.18
B	0.008		0.20	
C	0.022	0.024	0.56	0.60
D	0.059	0.067	1.50	1.70
E	0.020		0.50	
F	0.061	0.067	1.55	1.70
G	0.047		1.20	
H	0.006	0.012	0.15	0.30

SOT-563 (REV: R0)

LEAD CODE:

- 1) COLLECTOR
- 2) COLLECTOR
- 3) BASE
- 4) EMITTER
- 5) COLLECTOR
- 6) COLLECTOR

MARKING CODE: C64

R0 (18-October 2005)