

**WEJ78L06** Three-terminal positive voltage regulator**FEATURES**

Maximum Output current

I<sub>OM</sub>: 0.1 A

Output voltage

V<sub>O</sub>: 6 V



Operating and storage junction temperature range

T<sub>J</sub>, T<sub>STG</sub>: -55°C to +150°C**SOT-23-3L**

1. OUT

2. IN

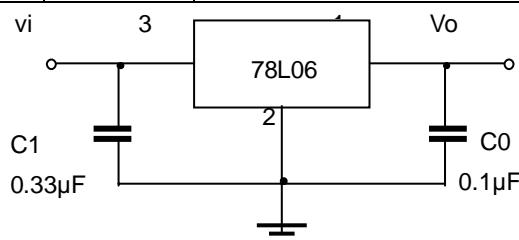
3. GND

**ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)**

| Parameter                            | Symbol           | Value    | Units |
|--------------------------------------|------------------|----------|-------|
| Input Voltage                        | V <sub>I</sub>   | 30       | V     |
| Operating Junction Temperature Range | T <sub>OPR</sub> | 0~+125   | °C    |
| Storage Temperature Range            | T <sub>STG</sub> | -55~+150 | °C    |

**ELECTRICAL CHARACTERISTICS (V<sub>I</sub>=12V, I<sub>O</sub>=40mA, 0°C < T<sub>J</sub> < 125°C, C<sub>1</sub>=0.33μF, C<sub>0</sub>=0.1μF, unless otherwise specified )**

| Parameter                | Symbol          | Test conditions  | MIN  | TYP | MAX  | UNIT        |
|--------------------------|-----------------|--|------|-----|------|-------------|
| Output voltage           | V <sub>O</sub>  | T <sub>J</sub> =25°C   | 5.75 | 6.0 | 6.25 | V           |
|                          |                 | 8V≤V <sub>I</sub> ≤20V, I <sub>O</sub> =1mA~40mA                 | 5.7  | 6.0 | 6.3  | V           |
|                          |                 | 8.5V≤V <sub>I</sub> ≤V <sub>MAX</sub> , I <sub>O</sub> =1mA~70mA | 5.7  | 6.0 | 6.3  | V<br>(note) |
| Load Regulation          | ΔV <sub>O</sub> | T <sub>J</sub> =25°C, I <sub>O</sub> =1mA~100mA                  | 16   | 80  | 80   | mV          |
|                          |                 | T <sub>J</sub> =25°C, I <sub>O</sub> =1mA~70mA                   | 9    | 40  | 40   | mV          |
| Line regulation          | ΔV <sub>O</sub> | 8V≤V <sub>I</sub> ≤20V, T <sub>J</sub> =25°C                     | 35   | 175 | 175  | mV          |
|                          |                 | 9V≤V <sub>I</sub> ≤20V, T <sub>J</sub> =25°C                     | 29   | 125 | 125  | mV          |
| Quiescent Current        | I <sub>Q</sub>  |  |      | 3.9 | 6.0  | mA          |
| Quiescent Current Change | ΔI <sub>Q</sub> | 9V≤V <sub>I</sub> ≤20V   |      |     | 1.5  | mA          |
|                          | ΔI <sub>Q</sub> | 1mA≤V <sub>I</sub> ≤40mA   |      |     | 0.1  | mA          |
| Output Noise Voltage     | V <sub>N</sub>  | 10Hz≤f≤100KHz  |      | 46  |      | uV          |
| Ripple Rejection         | RR              | 8V≤V <sub>I</sub> ≤19V, f=120HZ, T <sub>J</sub> =25°C            | 40   | 48  |      | dB          |
| Dropout Voltage          | V <sub>D</sub>  | T <sub>J</sub> =25°C   |      | 1.7 |      | V           |

**TYPICAL APPLICATION**

Note 1: Bypass capacitors are recommended for optimum stability and transient response and should be located as close possible to the regulators.