



NEC Electronics Inc.

μ PC3423
OVERVOLTAGE "CROWBAR"
SENSING CIRCUIT

Description

The μ PC3423 is an overvoltage protection circuit (OVP) that protects sensitive electronic circuitry from overvoltage transients or regulator failures when used in conjunction with an external "crowbar" SCR.

Features


- Threshold voltage easily programmed by external resistors
- Programmable trip delay
- 300 mA output current
- Equivalent to MC3423

Ordering Information

Part Number	Package	Operating Temperature Range
μ PC3423C	8-pin Plastic DIP	-20°C to +70°C

Recommended Operating Conditions

Parameter	Symbol	Limits			Unit
		Min	Typ	Max	
Supply Voltage	V+	4.5	36	45	V
Output Current	I ₀	0	300	300	mA
Indication Output Current	I _{0(Ind)}	0	10	10	mA

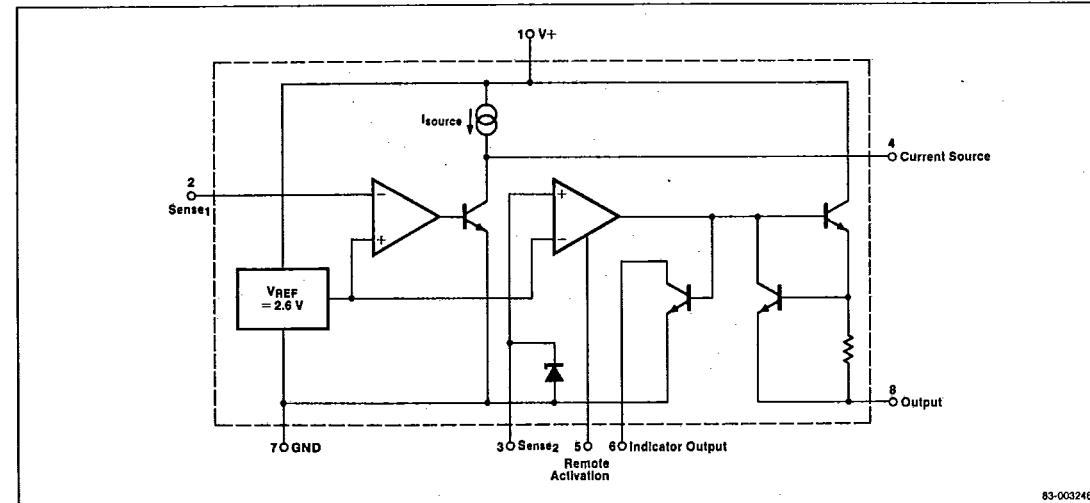Equivalent Circuit**1/4 Circuit**

7

μ PC3423


Electrical Characteristics

V₊ = 5.0 V, T_A = 25°C

Parameter	Symbol	Limits			Unit	Test Conditions
		Min	Typ	Max		
Output Voltage	V _O	V ₊ - 2.2	V ₊ - 1.8		V	I _O = 100 mA
Indication Output Voltage	V _{O(L)Ind}		0.2	0.4		I _{O(L)Ind} = 8 mA
Sense Voltage (1), (2)	V _{sense1} V _{sense2}	2.4	2.6	2.8	V	
Sense Voltage Drift	$\Delta V_{sense}/\Delta T$	-0.04			%/°C	-20°C ≤ T _A ≤ +70°C
Remote Activation Input Current	I _{IR}	0.1	40	μ A	V _{IR} = 2.0 V	
Remote Activation Input Current	I _{IL}	-250		μ A	V _{IL} = 0.8 V	
Source Current	I _{source}	300		μ A	See Test Circuit	
Output Current Rise Time	t _r	400		μ s	I _O = 100 mA	
Propagation Delay	t _{pd}	0.5				
Supply Current	I _{CC}	5.0	8.0	mA	pin 5 grounded, other terminals open	

Test Circuit

I_{source} Test Circuit

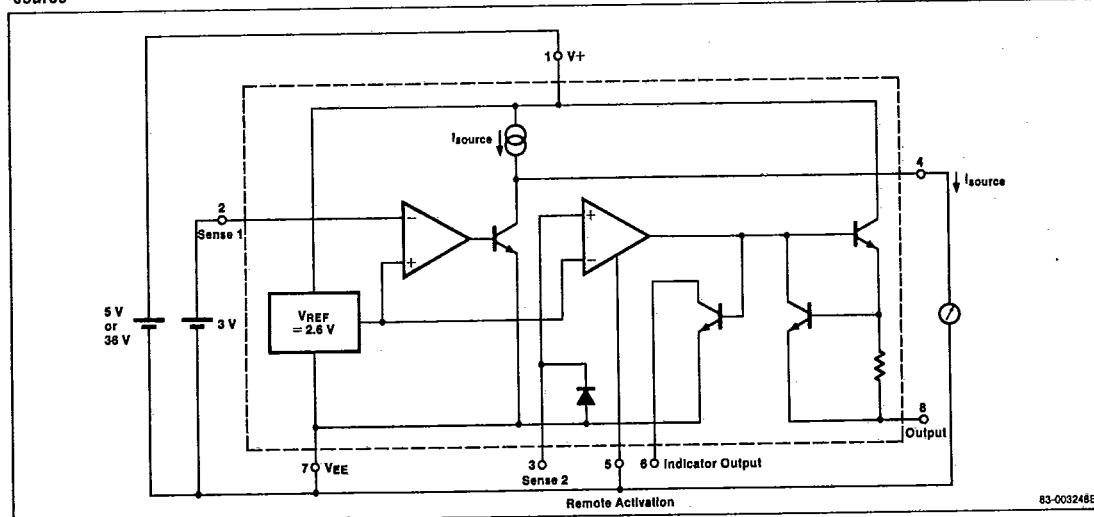


NEC

μ PC3423

Typical Applications

1. Basic Application

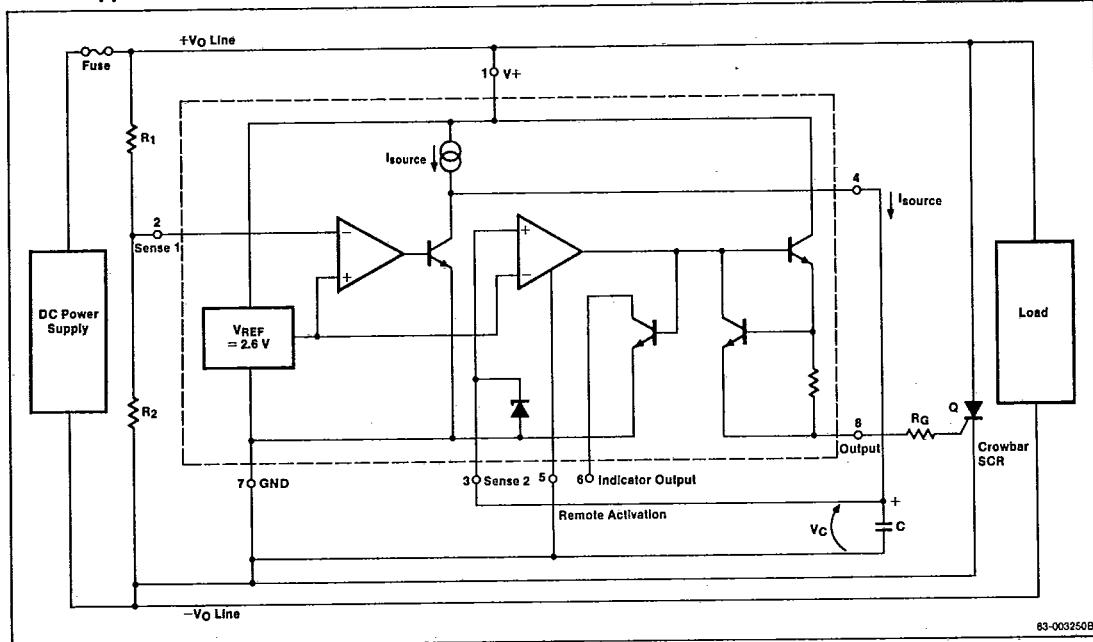


NEC


μ PC3423

Typical Applications (Cont.)

2. Application when programmable duration of overvoltage condition before trip is needed

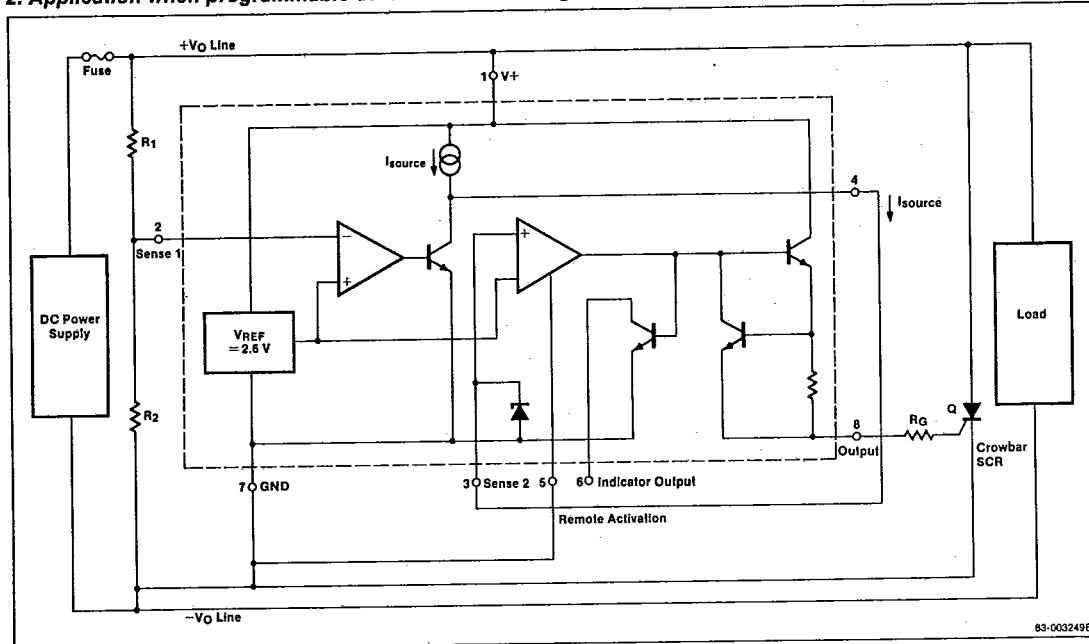

Timing Chart






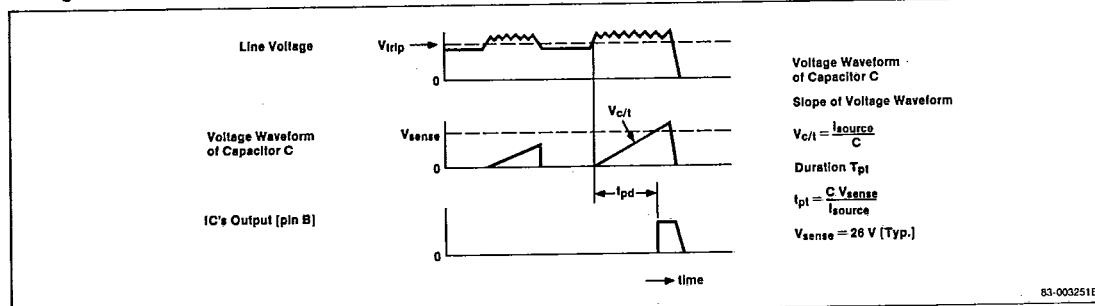


NEC

μ PC3423

Operating Characteristics

$T_A = 25^\circ\text{C}$

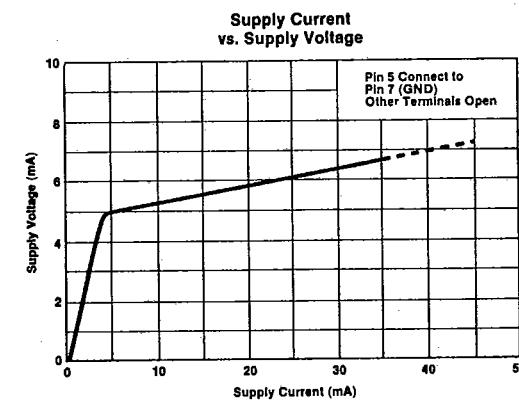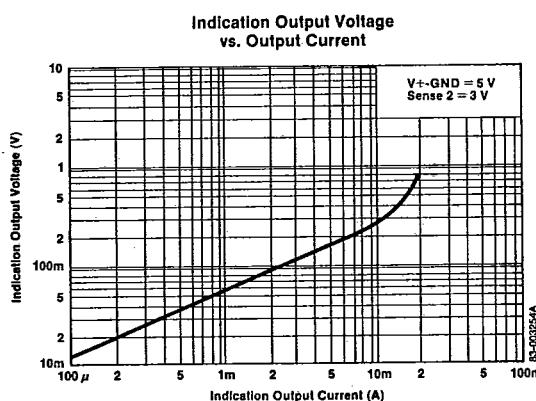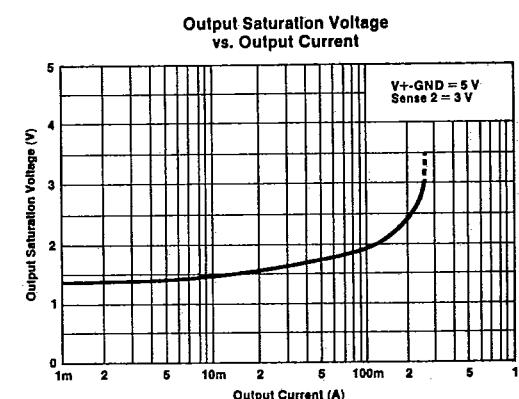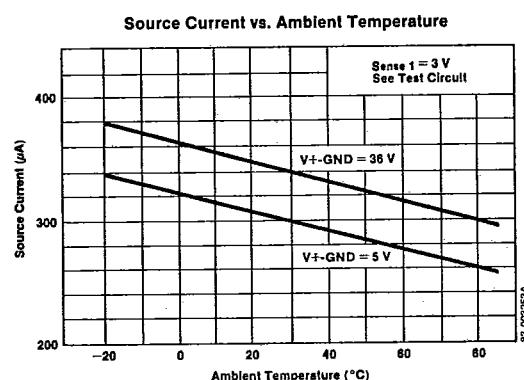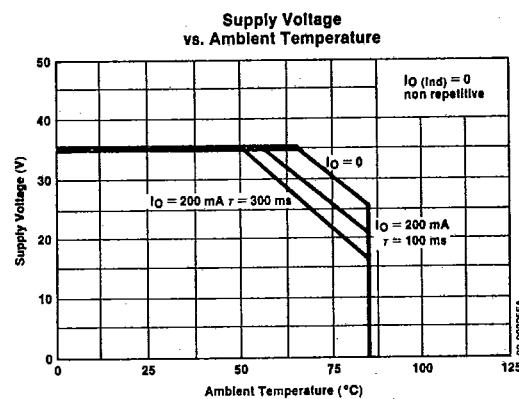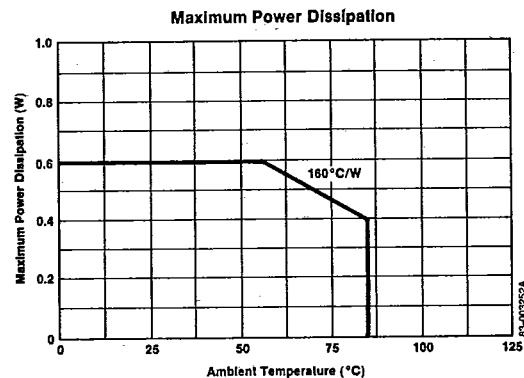

μ PC3423

NEC

Operating Characteristics (Cont.)

$T_A = 25^\circ\text{C}$

