



| | LCA715 | Units |
|-------------------|--------|----------|
| Blocking Voltage | 60 | V_p |
| Load Current | 1.8 | A |
| Max On-resistance | 0.25 | Ω |

Features

- Small 6 Pin Package
- Low Drive Power Requirements (TTL/CMOS Compatible)
- No Moving Parts
- High Reliability
- Arc-Free With No Snubbing Circuits
- $3750V_{rms}$ Input/Output Isolation
- No EMI/RFI Generation
- Machine Insertable, Wave Solderable
- Surface Mount and Tape & Reel Versions Available

Applications

- Instrumentation
 - Multiplexers
 - Data Acquisition
 - Electronic Switching
 - I/O Subsystems
 - Meters (Watt-Hour, Water, Gas)
- Medical Equipment—Patient/Equipment Isolation
- Security
- Aerospace
- Industrial Controls

Description

LCA715 is a 60V, 1.8A, 0.25Ω 1-Form-A relay. It features the highest load current capability in a 6 pin DIP package. Its high performance features include a 1.8 amp load current capability and very low on-resistance.

Approvals

- UL Recognized: File Number E76270
- CSA Certified: File Number LR 43639-10
- Certified to:
 - EN 60950
 - EN 41003


Ordering Information

| Part # | Description |
|-----------|---------------------------------|
| LCA715 | 6 Pin DIP (50/Tube) |
| LCA715S | 6 Pin Surface Mount (50/Tube) |
| LCA715STR | 6 Pin Surface Mount (1000/Reel) |

Pin Configuration


LCA715 Pinout

AC/DC Configuration

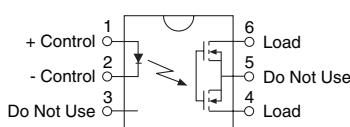


LCA715 Pinout

DC Only Configuration

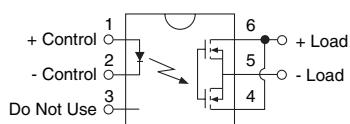

Switching Characteristics of Normally Open (Form A) Devices

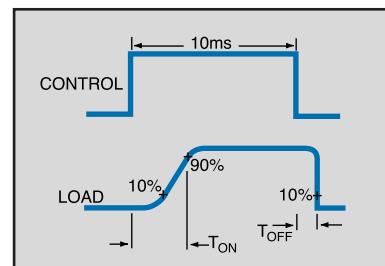

Absolute Maximum Ratings (@ 25° C)

| Parameter | Ratings | Units |
|---|------------------|------------------|
| Blocking Voltage | 60 | V _P |
| Reverse Input Voltage | 5 | V |
| Input Control Current Peak (10ms) | 50 1 | mA A |
| Input Power Dissipation | 150 ¹ | mW |
| Total Power Dissipation | 800 ² | mW |
| Isolation Voltage Input to Output | 3750 | V _{rms} |
| Operational Temperature | -40 to +85 | °C |
| Storage Temperature | -40 to +125 | °C |
| Soldering Temperature DIP Package | +260 | °C |
| Surface Mount Package (10 Seconds Max.) | +220 | °C |













¹ Derate Linearly 1.33 mW/°C² Derate Linearly 6.67 mW/°C

Absolute Maximum Ratings are stress ratings. Stresses in excess of these ratings can cause permanent damage to the device. Functional operation of the device at conditions beyond those indicated in the operational sections of this data sheet is not implied.








Electrical Characteristics

| Parameter | Conditions | Symbol | Min | Typ | Max | Units |
|--------------------------------------|---|-------------------|-----|-----|------|-------|
| Output Characteristics @ 25°C | | | | | | |
| Load Current | | | | | | |
| AC/DC Configuration | Continuous, Free Air | I _L | - | - | 1.8 | A |
| DC Configuration | Continuous, Free Air | I _L | - | - | 2.1 | A |
| Peak Load Current | 10ms | I _{LPK} | - | - | 10.0 | A |
| On-Resistance | | | | | | |
| AC/DC Configuration | I _L =1A | R _{ON} | - | 0.2 | 0.25 | Ω |
| DC Configuration | I _L =1.8A | R _{ON} | - | 0.1 | 0.15 | Ω |
| Off-State Leakage Current | V _L =60V | I _{LEAK} | - | - | 1 | μA |
| Switching Speeds | | | | | | |
| Turn-On | I _F =10mA, V _L =10V | T _{ON} | - | - | 2.5 | ms |
| Turn-Off | I _F =10mA, V _L =10V | T _{OFF} | - | - | 0.25 | ms |
| Output Capacitance | 50V; f=1MHz | - | - | 220 | - | pF |
| Input Characteristics @ 25°C | | | | | | |
| Input Control Current | I _I =1A | I _F | 10 | - | - | mA |
| Input Dropout Current | - | I _F | 0.4 | 0.7 | - | mA |
| Input Voltage Drop | I _F =10mA | V _F | 0.9 | 1.2 | 1.4 | V |
| Reverse Input Current | V _R =5V | I _R | - | - | 10 | μA |
| Common Characteristics @ 25°C | | | | | | |
| Input to Output Capacitance | - | C _{I/O} | - | 3 | - | pF |

PERFORMANCE DATA*

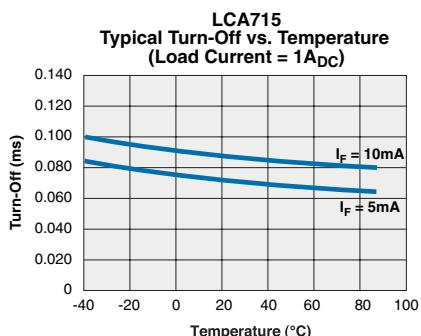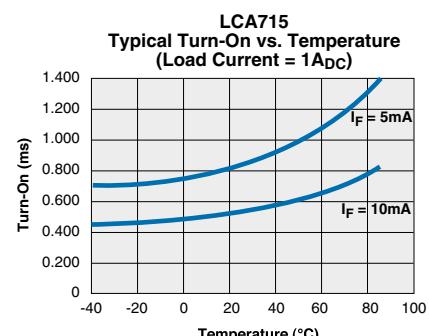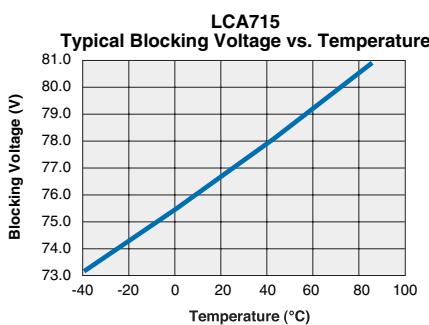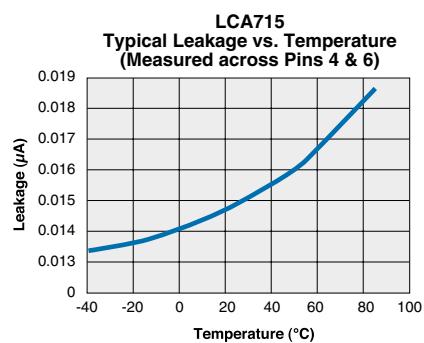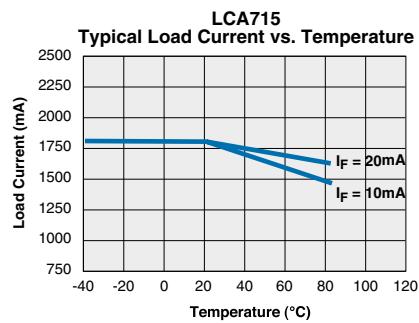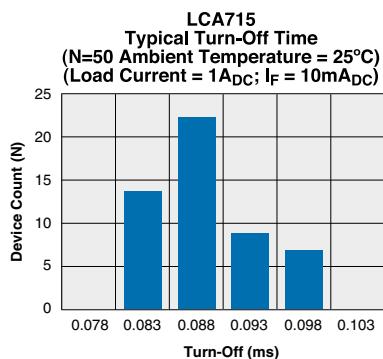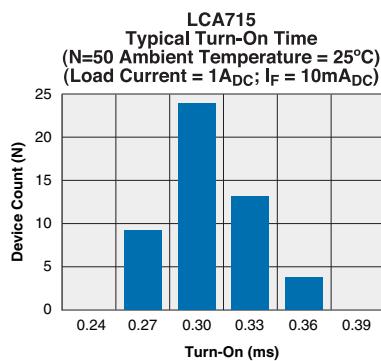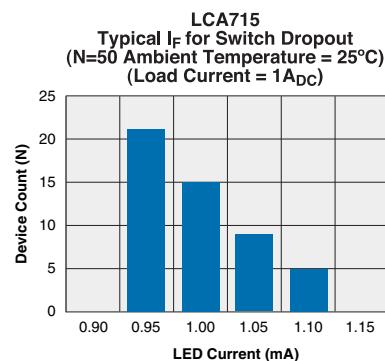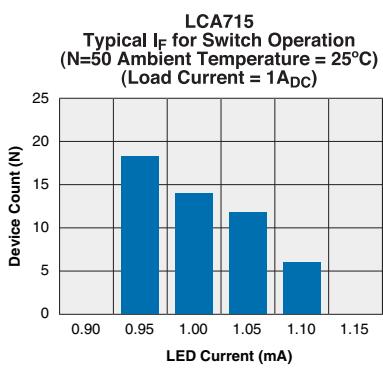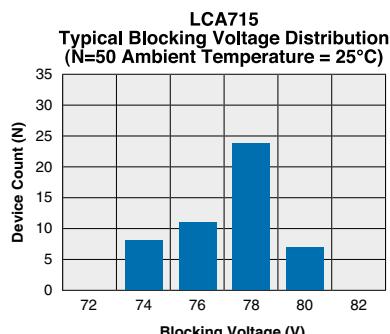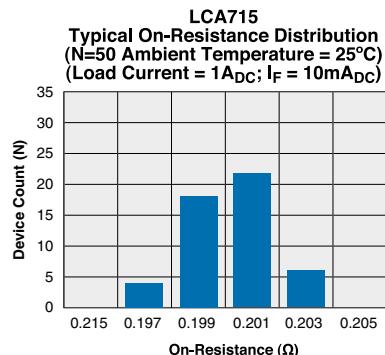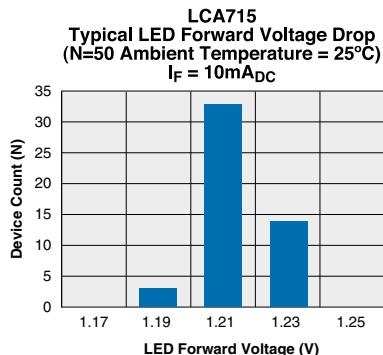


*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

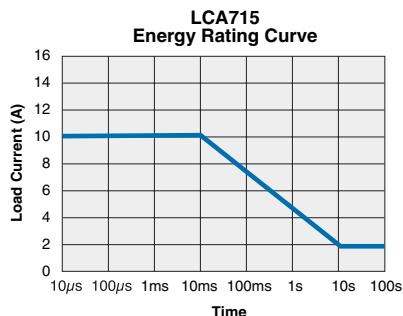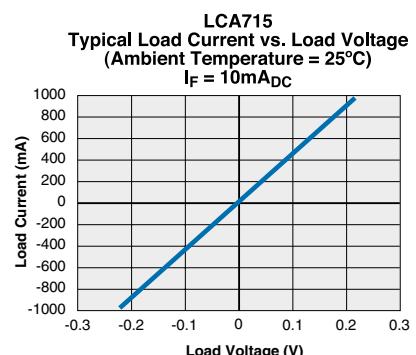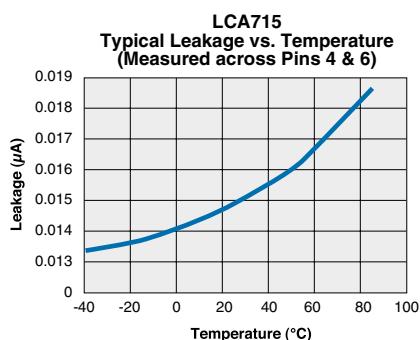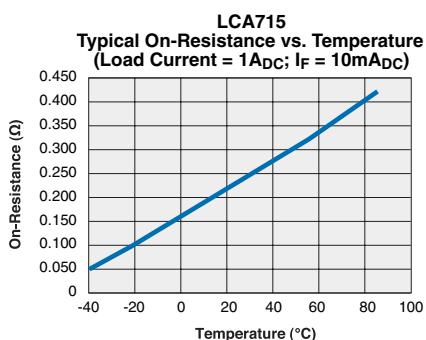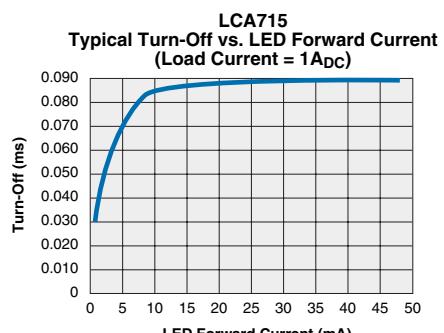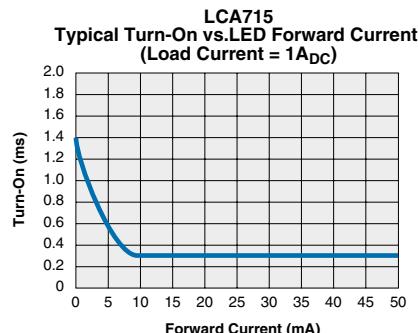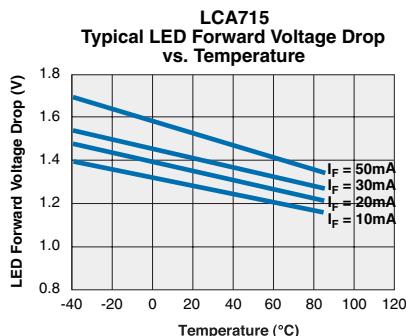PERFORMANCE DATA*


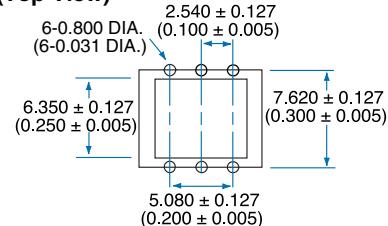
*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

MECHANICAL DIMENSIONS


6 Pin DIP Through Hole (Standard)

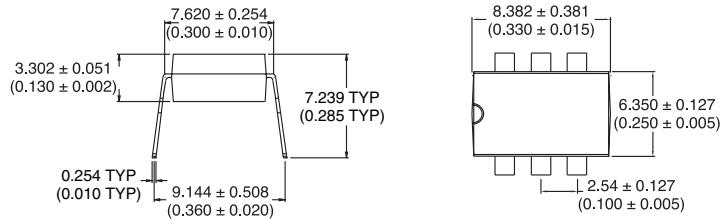


PC Board Pattern (Top View)




6 Pin Surface Mount ("S" Suffix)

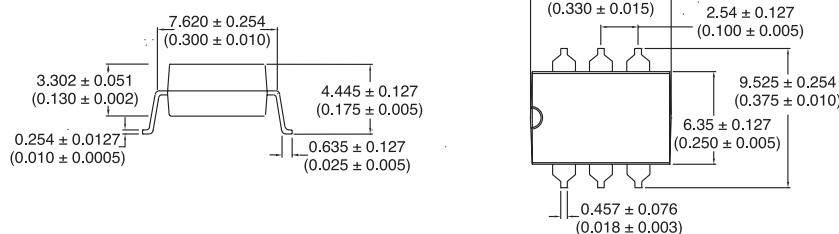

PC Board Pattern (Top View)

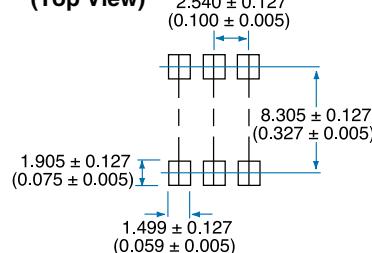

Tape and Reel Packaging for 6 Pin Surface Mount Package

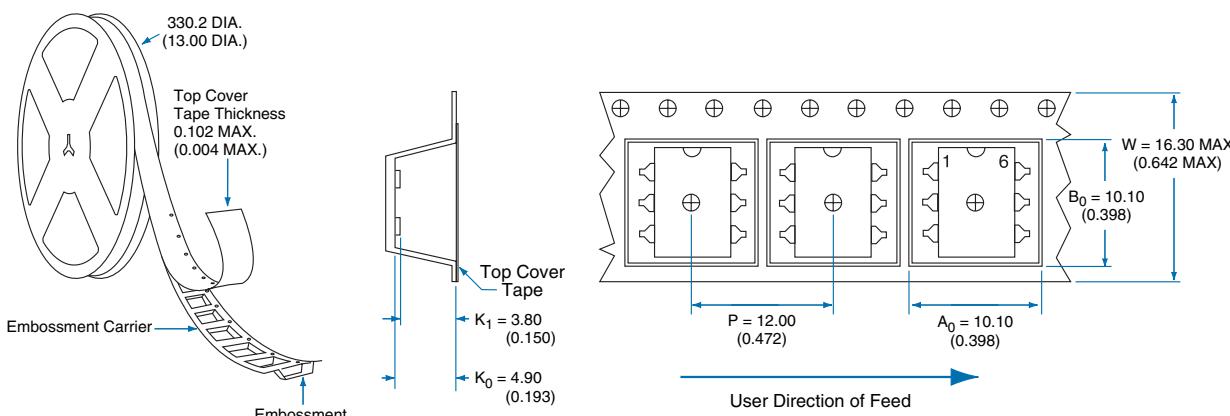

Dimensions:
mm
(inches)

For additional information please visit our website at: www.clare.com

Clare, Inc. makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. Neither circuit patent licenses nor indemnity are expressed or implied. Except as set forth in Clare's Standard Terms and Conditions of Sale, Clare, Inc. assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right.

The products described in this document are not designed, intended, authorized or warranted for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or where malfunction of Clare's product may result in direct physical harm, injury, or death to a person or severe property or environmental damage. Clare, Inc. reserves the right to discontinue or make changes to its products at any time without notice.