

2SD1327

Silicon NPN triple diffusion planar type Darlington

For medium speed power switching

Features

- Incorporating a zener diode of 60V zener voltage between collector and base
- Minimized variation in the breakdown voltage
- Large energy handling capability
- High-speed switching
- Full-pack package which can be installed to the heat sink with one screw

Absolute Maximum Ratings ($T_C=25^\circ\text{C}$)

Parameter	Symbol	Rated	Unit	
Collector to base voltage	V_{CBO}	60 ± 10	V	
Collector to emitter voltage	V_{CEO}	60 ± 10	V	
Emitter to base voltage	V_{EBO}	7	V	
Peak collector current	I_{CP}	12	A	
Collector current	I_C	8	A	
Collector power dissipation	P_C	$T_C=25^\circ\text{C}$	45	W
		$T_a=25^\circ\text{C}$	2	
Junction temperature	T_j	150	$^\circ\text{C}$	
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$	



Electrical Characteristics ($T_C=25^\circ\text{C}$)

Parameter	Symbol	Conditions	min	typ	max	Unit
Collector cutoff current	I_{CBO}	$V_{CB} = 50\text{V}, I_E = 0$			100	μA
Emitter cutoff current	I_{EBO}	$V_{EB} = 7\text{V}, I_C = 0$			2	mA
Collector to emitter voltage	V_{CEO}	$I_C = 5\text{mA}, I_B = 0$	50		70	V
Forward current transfer ratio	h_{FE1}^{*1}	$V_{CE} = 3\text{V}, I_C = 4\text{A}$	2000		10000	
	h_{FE2}	$V_{CE} = 3\text{V}, I_C = 8\text{A}$	500			
Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_C = 4\text{A}, I_B = 8\text{mA}$			1.5	V
Base to emitter saturation voltage	$V_{BE(sat)}$	$I_C = 4\text{A}, I_B = 8\text{mA}$			2	V
Transition frequency	f_T	$V_{CE} = 10\text{V}, I_C = 0.5\text{A}, f = 1\text{MHz}$		20		MHz
Turn-on time	t_{on}	$I_C = 4\text{A}, I_{B1} = 8\text{mA}, I_{B2} = -8\text{mA}, V_{CC} = 50\text{V}$		0.5		μs
Storage time	t_{stg}			4		μs
Fall time	t_f			1		μs
Energy handling capability	$E_{s/b}^{*2}$	$I_C = 1\text{A}, L = 100\text{mH}, R_{BE} = 100\Omega$	50			mJ


*1 h_{FE1} Rank classification

Rank	Q	P
h_{FE1}	2000 to 5000	4000 to 10000


*2 $E_{s/b}$ Test circuit

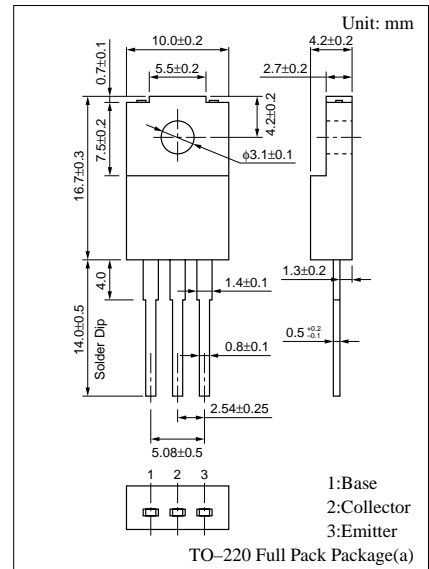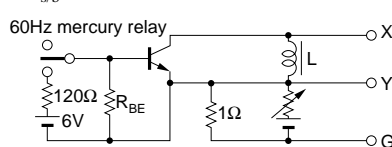


Internal Connection

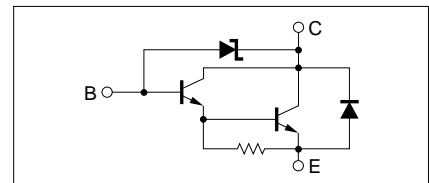


$P_C - T_a$

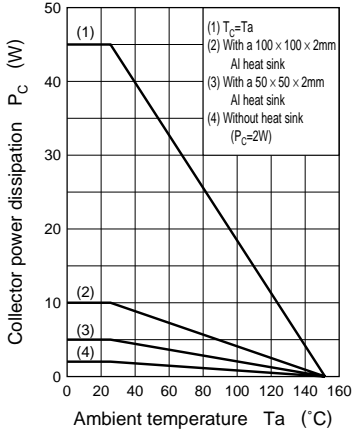


$I_C - V_{CE}$

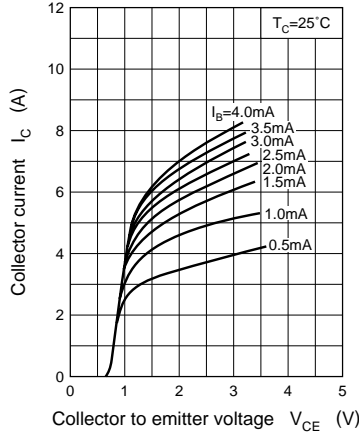


$V_{CE(sat)} - I_C$

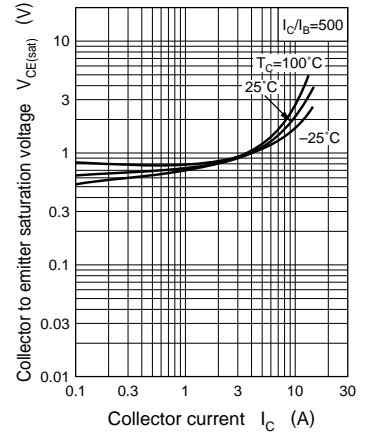


$V_{BE(sat)} - I_C$

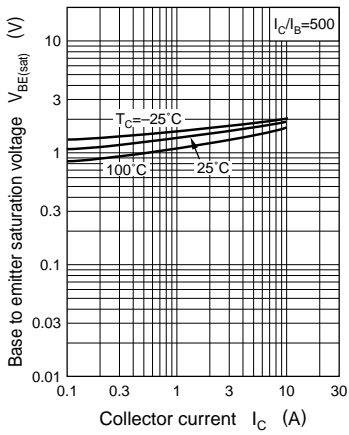


$h_{FE} - I_C$

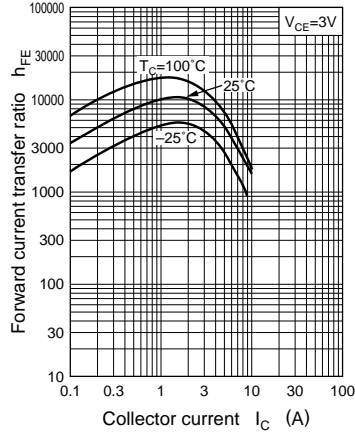

$I_C - L_{coil}$

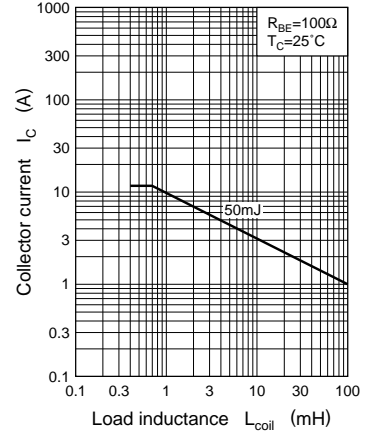

Area of safe operation (ASO)

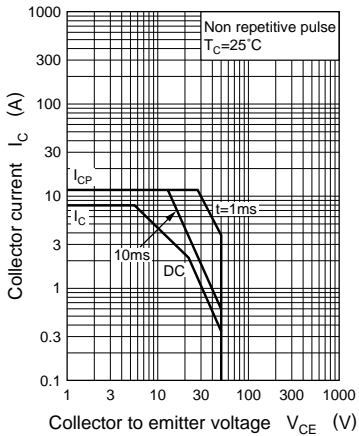

$R_{th(t)} - t$

