

Zener diode

PTZ20B

●Applications

Voltage regulation


●Features

- 1) Small power mold type. (PMDS)
- 2) High ESD tolerance


●Construction

Silicon epitaxial planar


●External dimensions (Unit : mm)

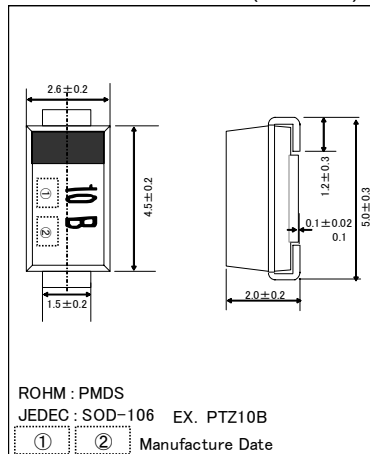


●Land size figure (Unit : mm)

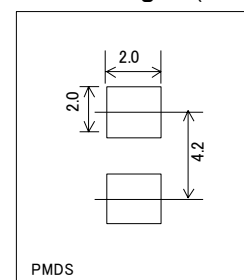

●Structure



●Taping dimensions (Unit : mm)

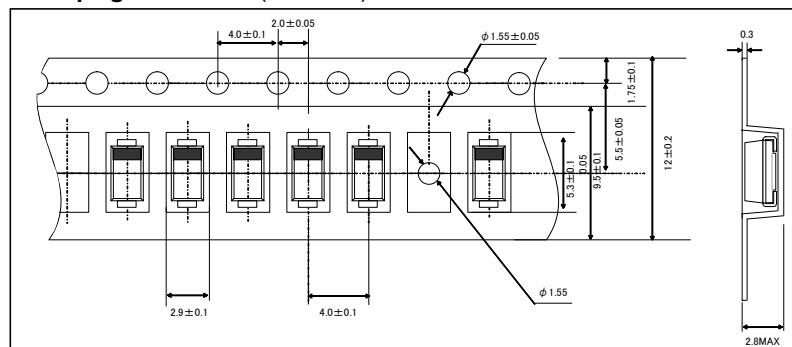

●Absolute maximum ratings (Ta=25°C)

| Parameter | Symbol | Limits | Unit |
|----------------------|------------------|-------------|------|
| Power dissipation | P | 1000 | mW |
| Junction temperature | T _j | 150 | °C |
| Storage temperature | T _{stg} | -55 to +150 | °C |

Diodes

●Electrical characteristics (Ta=25°C)

| TYP. | Symbol | | | | | | | | | | | MIN. | Test Condition | |
|----------|-----------------------|--------|--------|--------|------------------------------|--------|--------------------------|-------|--------------------------------------|--------|----------------------------------|--|----------------|--|
| | Zener voltage : Vz(V) | | | | Operating resistance : Zz(Ω) | | Reverse current : IR(μA) | | Temperature coefficient : *γz(mV/°C) | | ESD Break down voltage : ESD(kV) | | | |
| | MIN. | TYP. | MAX. | Iz(mA) | Max. | Iz(mA) | MAX. | VR(V) | TYP. | Iz(mA) | | | | |
| PTZ 3.6B | 3.600 | 3.813 | 4.000 | 40 | 15 | 40 | 60 | 1.0 | -2.8 | 40 | 30kV | C=150pF R=330Ω forward and reverse : 10 times | | |
| PTZ 3.9B | 3.900 | 4.136 | 4.400 | 40 | 15 | 40 | 40 | 1.0 | -2.4 | 40 | | | | |
| PTZ 4.3B | 4.300 | 4.572 | 4.800 | 40 | 15 | 40 | 20 | 1.0 | -2.1 | 40 | | | | |
| PTZ 4.7B | 4.700 | 4.924 | 5.200 | 40 | 10 | 40 | 20 | 1.0 | -1.7 | 40 | | | | |
| PTZ 5.1B | 5.100 | 5.368 | 5.700 | 40 | 8 | 40 | 20 | 1.5 | -0.6 | 40 | | | | |
| PTZ 5.6B | 5.600 | 5.856 | 6.300 | 40 | 8 | 40 | 20 | 2.5 | 1.4 | 40 | | | | |
| PTZ 6.2B | 6.200 | 6.509 | 7.000 | 40 | 6 | 40 | 20 | 3.0 | 2.5 | 40 | | | | |
| PTZ 6.8B | 6.800 | 7.280 | 7.700 | 40 | 6 | 40 | 20 | 3.5 | 3.2 | 40 | | | | |
| PTZ 7.5B | 7.500 | 7.889 | 8.400 | 40 | 4 | 40 | 20 | 4.0 | 4.2 | 40 | | | | |
| PTZ 8.2B | 8.200 | 8.655 | 9.300 | 40 | 4 | 40 | 20 | 5.0 | 5.0 | 40 | | | | |
| PTZ 9.1B | 9.100 | 9.747 | 10.200 | 40 | 6 | 40 | 20 | 6.0 | 5.9 | 40 | | | | |
| PTZ 10B | 10.000 | 10.310 | 11.200 | 40 | 6 | 40 | 10 | 7.0 | 6.9 | 40 | | | | |
| PTZ 11B | 11.000 | 11.510 | 12.300 | 20 | 8 | 20 | 10 | 8.0 | 7.9 | 20 | | | | |
| PTZ 12B | 12.000 | 12.500 | 13.500 | 20 | 8 | 20 | 10 | 9.0 | 8.7 | 20 | | | | |
| PTZ 13B | 13.300 | 13.820 | 15.000 | 20 | 10 | 20 | 10 | 10.0 | 10.1 | 20 | | | | |
| PTZ 15B | 14.700 | 15.350 | 16.500 | 20 | 10 | 20 | 10 | 11.0 | 11.8 | 20 | | | | |
| PTZ 16B | 16.200 | 16.860 | 18.300 | 20 | 12 | 20 | 10 | 12.0 | 13.3 | 20 | | | | |
| PTZ 18B | 18.000 | 19.000 | 20.300 | 20 | 12 | 20 | 10 | 13.0 | 15.0 | 20 | | | | |
| PTZ 20B | 20.000 | 20.820 | 22.400 | 20 | 14 | 20 | 10 | 15.0 | 17.4 | 20 | | | | |
| PTZ 22B | 22.000 | 23.850 | 24.500 | 10 | 14 | 10 | 10 | 17.0 | 19.4 | 10 | | | | |
| PTZ 24B | 24.000 | 25.310 | 27.600 | 10 | 16 | 10 | 10 | 19.0 | 21.6 | 10 | | | | |
| PTZ 27B | 27.000 | 28.700 | 30.800 | 10 | 16 | 10 | 10 | 21.0 | 24.6 | 10 | | | | |
| PTZ 30B | 30.000 | 31.570 | 34.000 | 10 | 18 | 10 | 10 | 23.0 | 27.5 | 10 | | | | |
| PTZ 33B | 33.000 | 34.950 | 37.000 | 10 | 18 | 10 | 10 | 25.0 | 30.8 | 10 | | | | |
| PTZ 36B | 36.000 | 39.240 | 40.000 | 10 | 20 | 10 | 10 | 27.0 | 37.0 | 10 | | | | |

1.The Zener voltage(Vz) is measured 40ms after power is supplied.





2.The operating resistances(Zz, Zzk) are measured by superimposing a minute alternating current on the regulated current(Iz).

●Marking (TYPE NO.)









| TYPE | TYPE NO. | TYPE | TYPE NO. | TYPE | TYPE NO. |
|----------|----------|----------|----------|---------|----------|
| PTZ 3.6B | 3.6B | PTZ 8.2B | 8.2B | PTZ 20B | 20B |
| PTZ 3.9B | 3.9B | PTZ 9.1B | 9.1B | PTZ 22B | 22B |
| PTZ 4.3B | 4.3B | PTZ 10B | 10B | PTZ 24B | 24B |
| PTZ 4.7B | 4.7B | PTZ 11B | 11B | PTZ 27B | 27B |
| PTZ 5.1B | 5.1B | PTZ 12B | 12B | PTZ 30B | 30B |
| PTZ 5.6B | 5.6B | PTZ 13B | 13B | PTZ 33B | 33B |
| PTZ 6.2B | 6.2B | PTZ 15B | 15B | PTZ 36B | 36B |
| PTZ 6.8B | 6.8B | PTZ 16B | 16B | | |
| PTZ 7.5B | 7.5B | PTZ 18B | 18B | | |

Diodes

●Electrical characteristic curves (Ta=25°C)

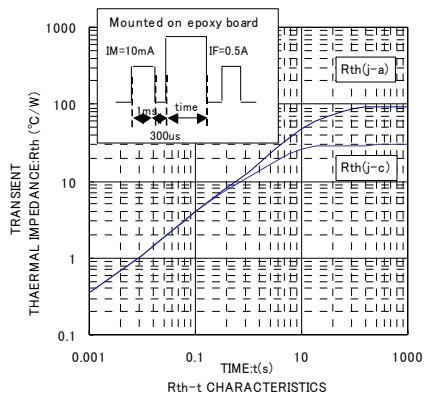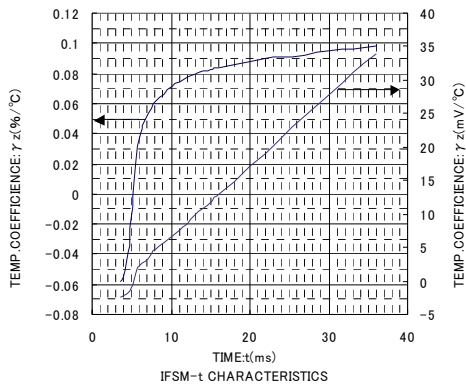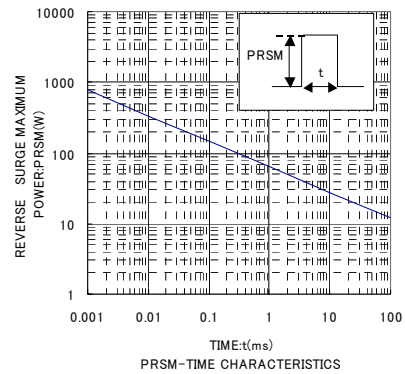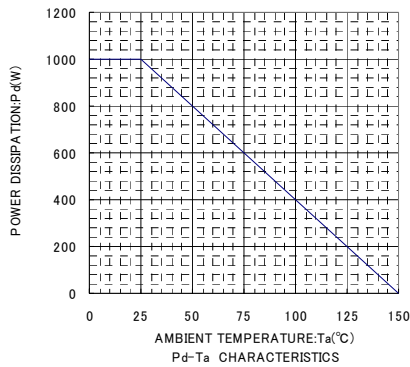

Diodes

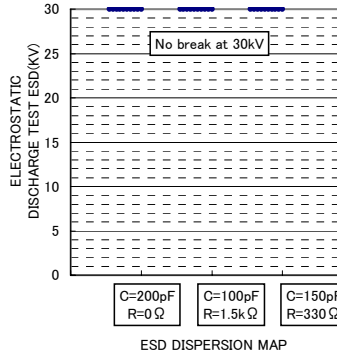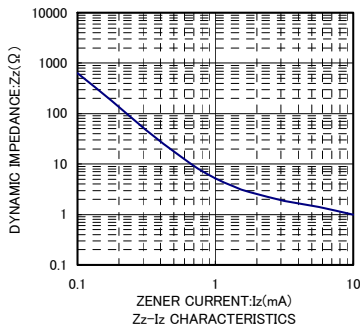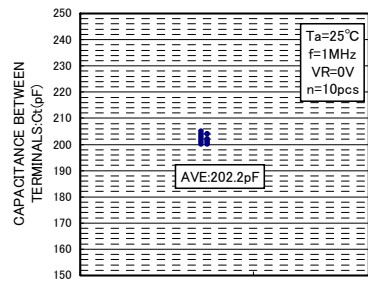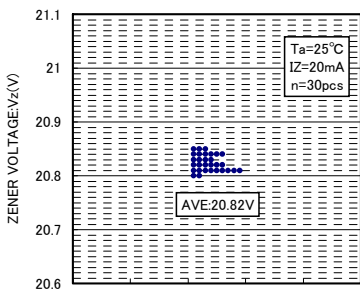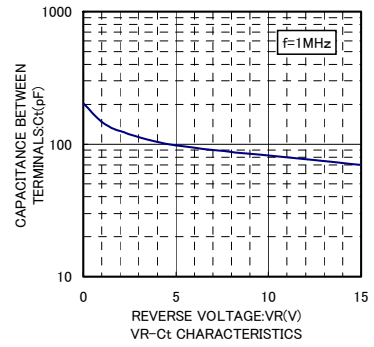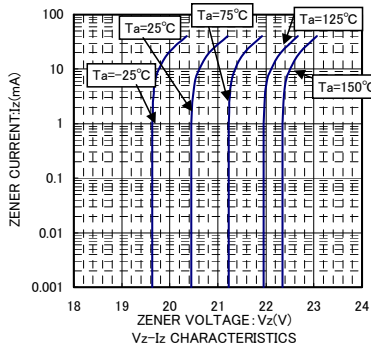

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.