

Surface Mount Directional Coupler

ADC-6-13+ ADC-6-13

50Ω 200 to 1300 MHz




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C


Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2
50Ω TERM EXTERNAL	4
GROUND or NO CONNECTION	5

Outline Drawing

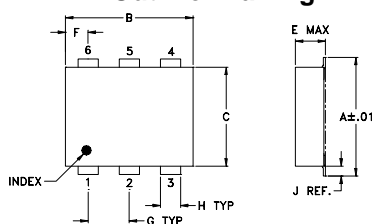

PCB Land Pattern




Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54

H	J	K	L	wt
.030	.026	.065	.300	grams
0.76	0.66	1.65	7.62	0.20

Demo Board MCL P/N: TB-05 Suggested PCB Layout (PL-041)

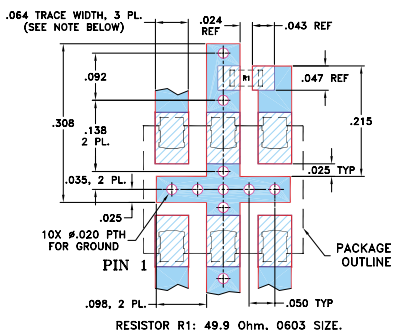

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wideband, 200-1300 MHz
- excellent VSWR, 1.3:1 typ.
- excellent coupling flatness, ±0.5 typ.
- aqueous washable
- protected by U.S. Patents 6,133,525 & 6,140,887

Applications

- cellular
- VHF/UHF receivers

CASE STYLE: CD542
PRICE: \$6.95 ea. QTY (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Directional Coupler Electrical Specifications


FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT, W	
	Nom.	Flatness	Typ.	Max.	Typ.	Min.		L Max.	MU Max.
f _L -f _U									
200-1300	6.2±0.5	±0.9	1.8	2.5	17	10	1.3	0.5	0.5

1. Mainline loss includes theoretical power loss at coupled port.


Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
200.00	1.63	6.78	15.32	16.16	16.80	16.37
400.00	1.57	6.77	16.43	19.27	20.03	18.22
500.00	1.56	6.70	16.81	20.80	20.81	18.74
600.00	1.59	6.61	17.19	22.02	21.37	18.95
700.00	1.64	6.52	17.56	22.08	21.46	19.14
900.00	1.76	6.29	18.16	20.57	20.96	20.03
1000.00	1.85	6.20	18.24	19.80	21.45	20.54
1100.00	1.95	6.11	18.05	18.83	19.86	21.08
1200.00	2.05	6.04	17.55	17.57	19.28	21.80
1300.00	2.16	5.98	16.79	16.32	18.80	22.81


ADC-6-13
MAINLINE LOSS

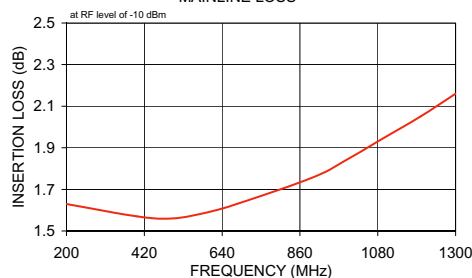


ADC-6-13
COUPLING & DIRECTIVITY

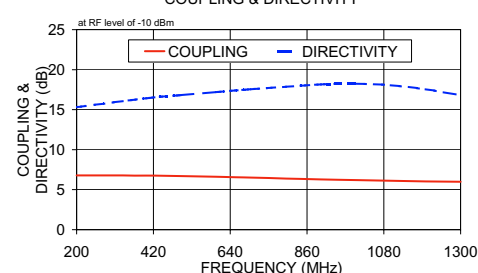

ADC-6-13
RETURN LOSS

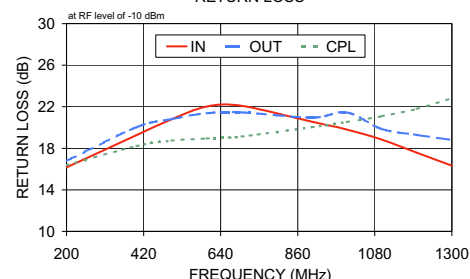

electrical schematic



Mini-Circuits
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. C
M112428
ED-8270/1
ADC-6-13
WZ/TD/CP/AM
070920