


Specifications


Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	135.22	135.42	135.62
Insertion Loss	dB	-	13.7	14
3 dB Bandwidth	MHz	8	8.6	9
40 dB Bandwidth	MHz	-	15.5	20
Phase Ripple	degree	-	6	-
Absolute Delay	usec	-	0.62	-
Passband Variation	dB	-	1	1.5
Group Delay Variation	nsec	-	64	80
Ultimate Rejection	dB	35	38	-
Substrate Material		YZ LN		
Ambient Temperature	°C	25		
Package Size		SMP (7x5x1.48mm ³)		

Notes:


1. All specifications are based on the test circuit shown
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance shown

Matching Configuration

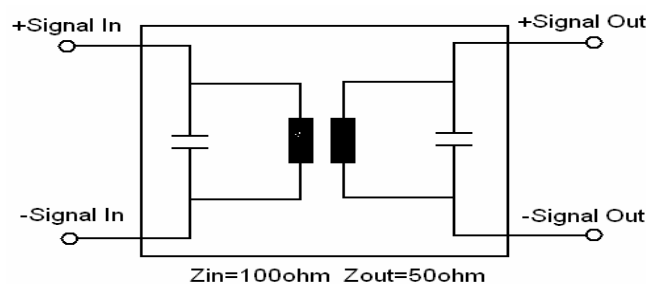

	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	SP LB LB135DS01	
		Rev. Date	2004-10-12	
		Rev.	1.0	Page 1/3


Package Dimension

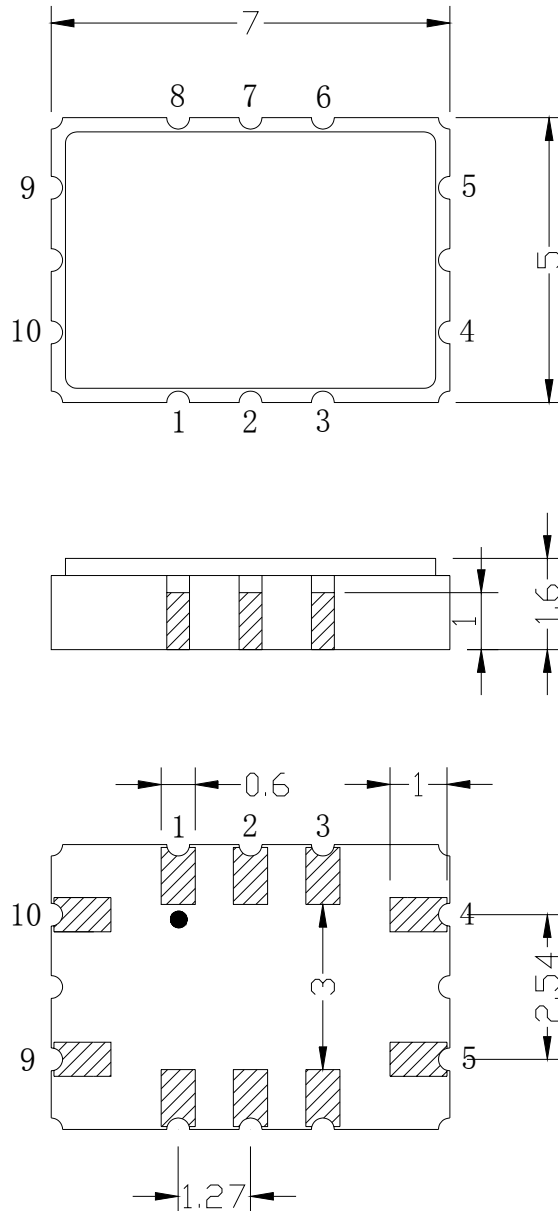


SIPAT Co., Ltd.
(CETC No. 26 Research Institute)
Nanping Huayuan Road No. 14
Chongqing, China, 400060

Part Number	SP LB LB135DS01	
Rev. Date	2004-10-12	
Rev.	1.0	Page 2/3

Typical Performance

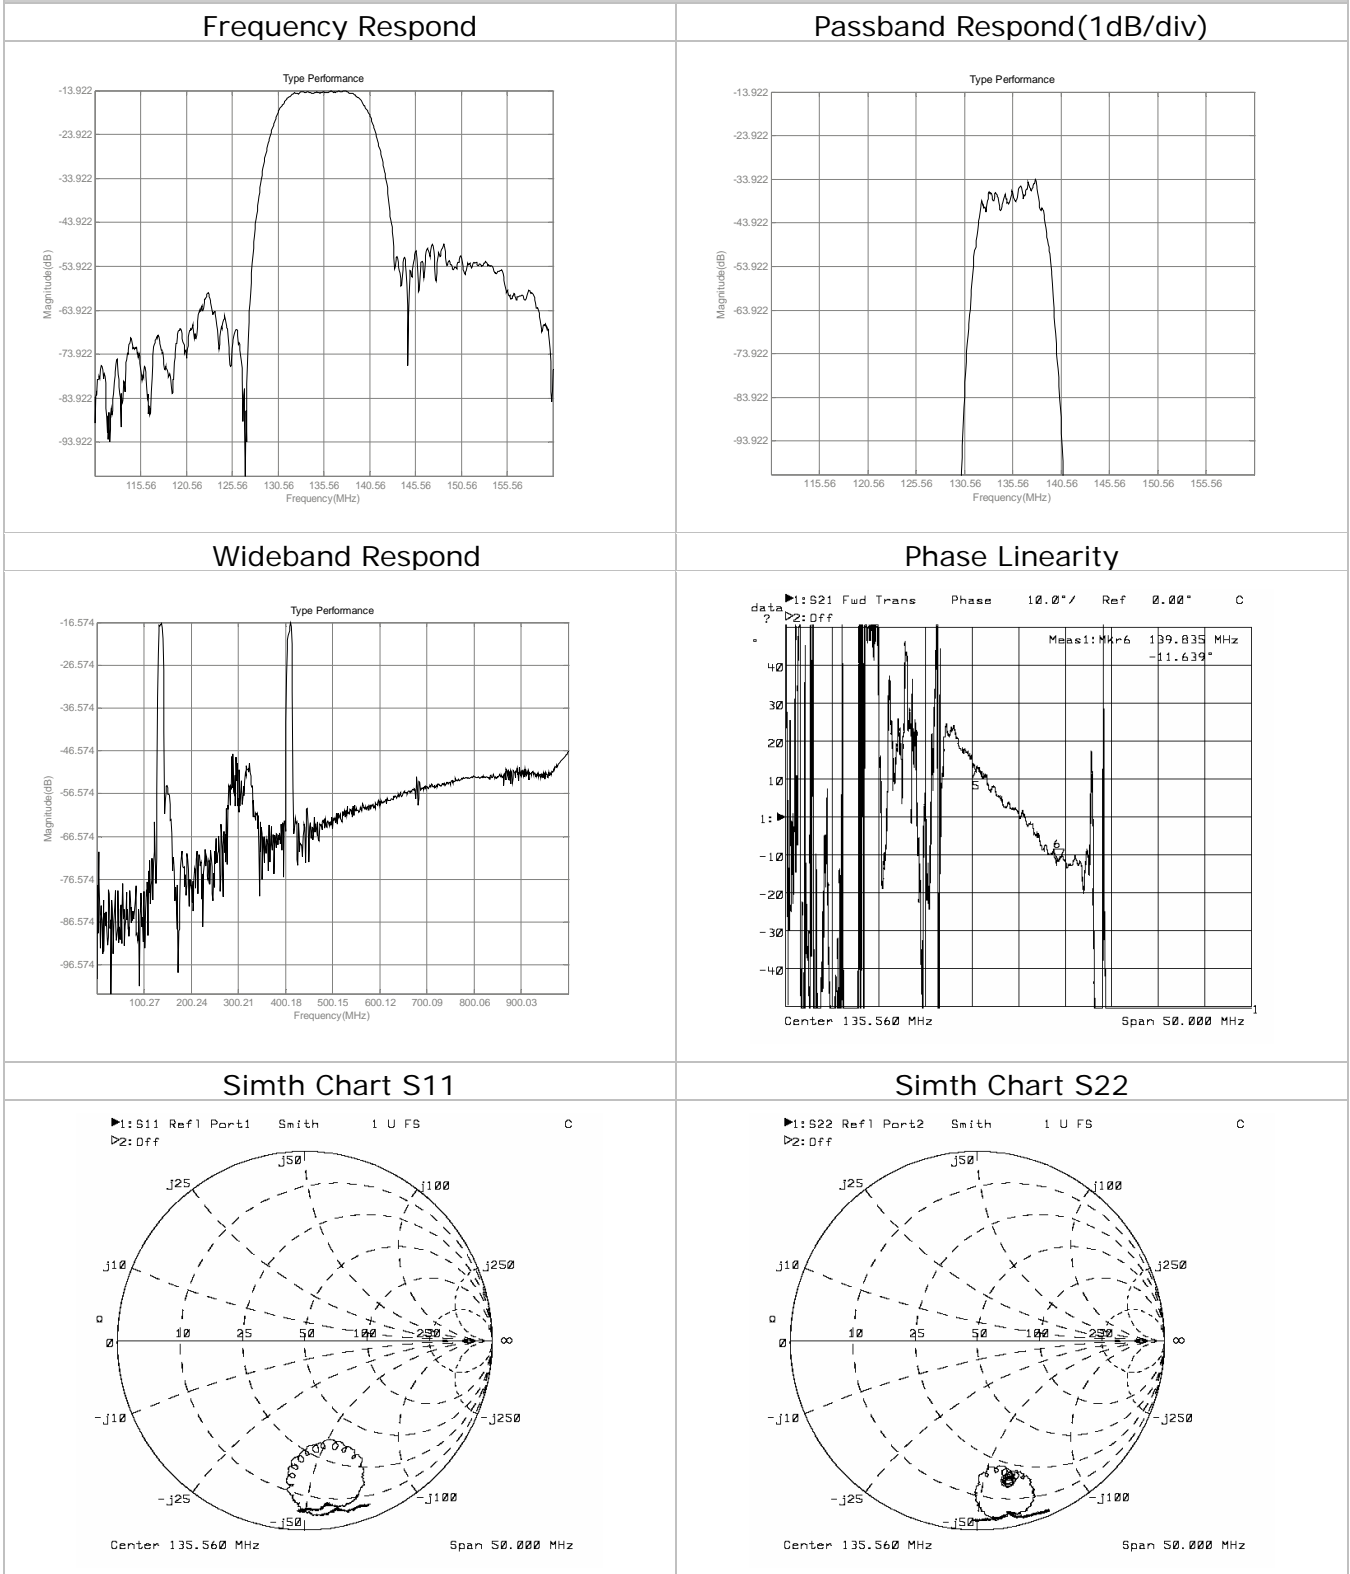

	<p>SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060</p>	Part Number	SP LB LB135DS01	
		Rev. Date	2004-10-12	
		Rev.	1.0	Page