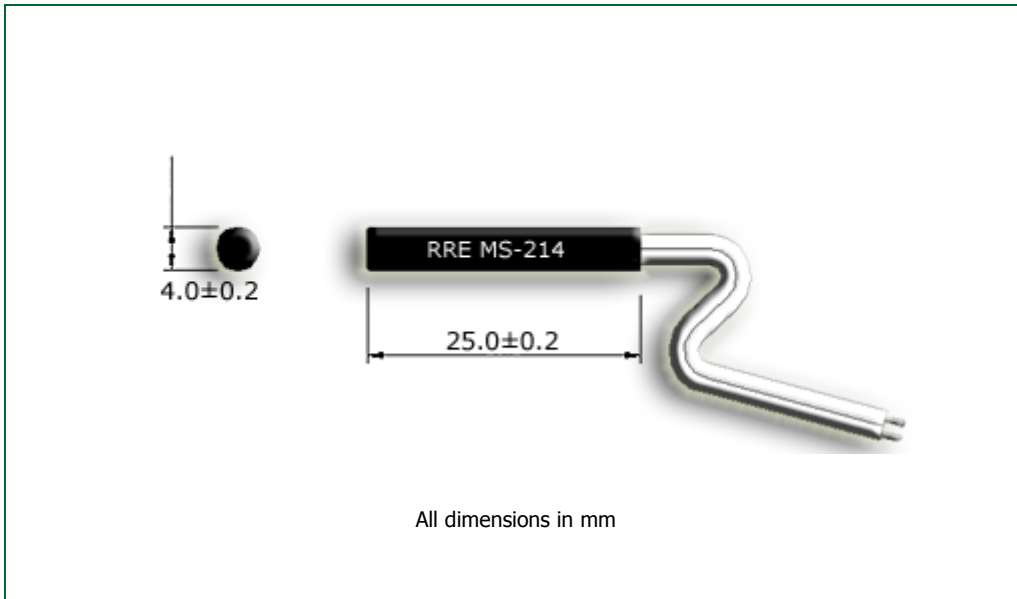


MS-214 Cylindrical Magnet Sensor

Miniature, 4.0 mm Diameter x 25.4 mm, 10 W



- ◆ Does not require power for operation
- ◆ Omni-polar device; actuates with either pole of magnet
- ◆ Normally open (NO) contact
- ◆ 10W switching capability
- ◆ Three magnetic sensitivity bands
- ◆ Lead (Pb) free and RoHS compliant

🔧 Applications

This magnet sensor is suitable for use in the following applications and many others: fluid and electricity meters, detergent level sensing in washing machines, two wheeler throttle, accidental airbag deployment prevention...

📊 Specification

Contact Form		A
Contact Rating (max)	W / VA	10
Switching Current (max)	A	0.5
Carry Current (max)	A	1.5
Switching Voltage (max)	V _{DC}	180
Breakdown Voltage (min)	V _{DC}	200
Initial Contact Resistance (max)	mΩ	150
Operating Temperature	°C	-40 to +70
Shock Resistance (1/2Sin wave for 11ms)	g	30
Vibration Resistance (10-2000Hz)	g	20

📋 Ordering Code

MS-214-(Operate AT Code)-(Cable length in mm)-(Lead Code)

OAT Code		Lead Code	
1	10 – 15	S	Stripped to 5mm
2	15 – 20	T	Stripped to 5mm and Tinned
3	20 – 25	M	Molex Connector

🔧 Example

MS-214-1-500-M denotes 10-15 Operate AT, with 500 mm cable length and Molex connectors.

Due to continual improvement, specifications are subject to change without notice

www.reed-sensor.com


15 March 2008


MS-214 Cylindrical Magnet Sensor

Actuation Distances


Operate and release distances for the MS-214 miniature cylindrical sensor, in two AT bands when actuated (as shown in the sketches) with NdFeB standard magnets is shown below. All distances given are in mm with tolerances of $\pm 0.5\text{mm}$. Although some of the AT band / magnet combinations will produce similar actuating distances, selecting the right AT band and magnet for an application is important and can be done by going through our AT band FAQ and our magnet selection guide.


MS-214-1 (10-15 AT)

Actuation Sketch	Magnet	Dimensions	Operate Distance	Release Distance
	NDR-T	4.0 x 1.5 x 1.5	1.0 - 2.5	1.5 - 3.0
	NDC-T	$\varnothing 2.0 \times 4.0$	1.5 - 2.5	2.0 - 3.5
	NDR-S	6.0 x 2.5 x 2.5	4.5 - 7.5	6.0 - 8.0
	NDC-S	$\varnothing 3.0 \times 7.0$	6.0 - 8.5	8.0 - 9.0
	NDR-M	8.0 x 3.0 x 3.0	8.0 - 11.0	9.5 - 11.5
	NDC-M	$\varnothing 4.0 \times 10.0$	11.5 - 16.0	13.0 - 17.0
	NDR-L	19.0 x 4.0 x 4.0	16.5 - 22.0	19.0 - 23.0
	NDC-L	$\varnothing 8.0 \times 15.0$	30.0 - 39.0	34.0 - 40.0

Actuation Sketch	Magnet	Dimensions	Operate Distance	Release Distance
	NDR-T	4.0 x 1.5 x 1.5	3.0 - 5.0	3.5 - 5.5
	NDC-T	$\varnothing 2.0 \times 4.0$	3.5 - 6.0	5.0 - 7.0
	NDR-S	6.0 x 2.5 x 2.5	7.5 - 11.0	9.0 - 11.5
	NDC-S	$\varnothing 3.0 \times 7.0$	9.5 - 12.5	10.5 - 13.0
	NDR-M	8.0 x 3.0 x 3.0	11.0 - 15.0	13.0 - 16.0
	NDC-M	$\varnothing 4.0 \times 10.0$	14.0 - 19.0	16.5 - 20.0
	NDR-L	19.0 x 4.0 x 4.0	20.0 - 22.0	23.0 - 24.0
	NDC-L	$\varnothing 8.0 \times 15.0$	30.0 - 38.0	33.0 - 39.0

MS-214-2 (15-20 AT)

Actuation Sketch	Magnet	Dimensions	Operate Distance	Release Distance
	NDR-T	4.0 x 1.5 x 1.5	N/A	N/A
	NDC-T	$\varnothing 2.0 \times 4.0$	0.5 - 1.0	1.0 - 1.5
	NDR-S	6.0 x 2.5 x 2.5	3.5 - 4.5	5.5 - 6.5
	NDC-S	$\varnothing 3.0 \times 7.0$	5.0 - 6.0	7.0 - 8.0
	NDR-M	8.0 x 3.0 x 3.0	6.0 - 8.0	9.0 - 10.0
	NDC-M	$\varnothing 4.0 \times 10.0$	10.0 - 11.5	12.5 - 13.5
	NDR-L	19.0 x 4.0 x 4.0	14.0 - 16.5	18.0 - 19.0
	NDC-L	$\varnothing 8.0 \times 15.0$	26.5 - 30.0	32.0 - 34.0

Actuation Sketch	Magnet	Dimensions	Operate Distance	Release Distance
	NDR-T	4.0 x 1.5 x 1.5	2.5 - 3.0	3.5 - 4.5
	NDC-T	$\varnothing 2.0 \times 4.0$	3.0 - 3.5	4.0 - 5.0
	NDR-S	6.0 x 2.5 x 2.5	6.5 - 7.5	8.0 - 9.0
	NDC-S	$\varnothing 3.0 \times 7.0$	8.0 - 9.5	10.0 - 11.0
	NDR-M	8.0 x 3.0 x 3.0	10.0 - 11.0	11.0 - 13.0
	NDC-M	$\varnothing 4.0 \times 10.0$	13.0 - 14.0	16.0 - 17.0
	NDR-L	19.0 x 4.0 x 4.0	19.0 - 20.0	22.0 - 23.0
	NDC-L	$\varnothing 8.0 \times 15.0$	27.0 - 30.0	32.0 - 33.0

Due to continual improvement, specifications are subject to change without notice

www.reed-sensor.com

20 January 2009