


Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	159.9	160	160.1
Insertion Loss	dB	-	30	31.5
1.5 dB Bandwidth	MHz	13.9	14.07	-
3 dB Bandwidth	MHz	14.1	14.29	-
40 dB Bandwidth	MHz	-	15.4	15.6
50 dB Bandwidth	MHz	-	15.55	-
Passband Variation($f_0 \pm 6.875\text{MHz}$)	dB	-	0.8	1.0
Absolute Delay	usec	-	3.32	-
Group Delay Variation($f_0 \pm 6.875\text{MHz}$)	nsec	-	80	100
Ultimate Rejection	dB	45	50	-
Material Temperature coefficient	KHz/°C	-2.88		
Ambient Temperature	°C	25		
Package Size	DIP3512 (35.2x12.7x5.2mm ³)			

Notes:


1. All specifications are based on the test circuit shown
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance show

Matching Configuration

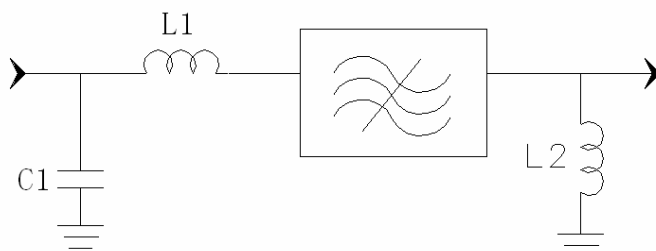


L1=27nH L2=15nH
C1=36pF
Source/Load Impedance=50 ohm


Notes - Component values may change depending on board layout.

	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	LBT16035	
		Rev. Date	2005-12-15	
		Rev.	1.0	Page

Package Dimension

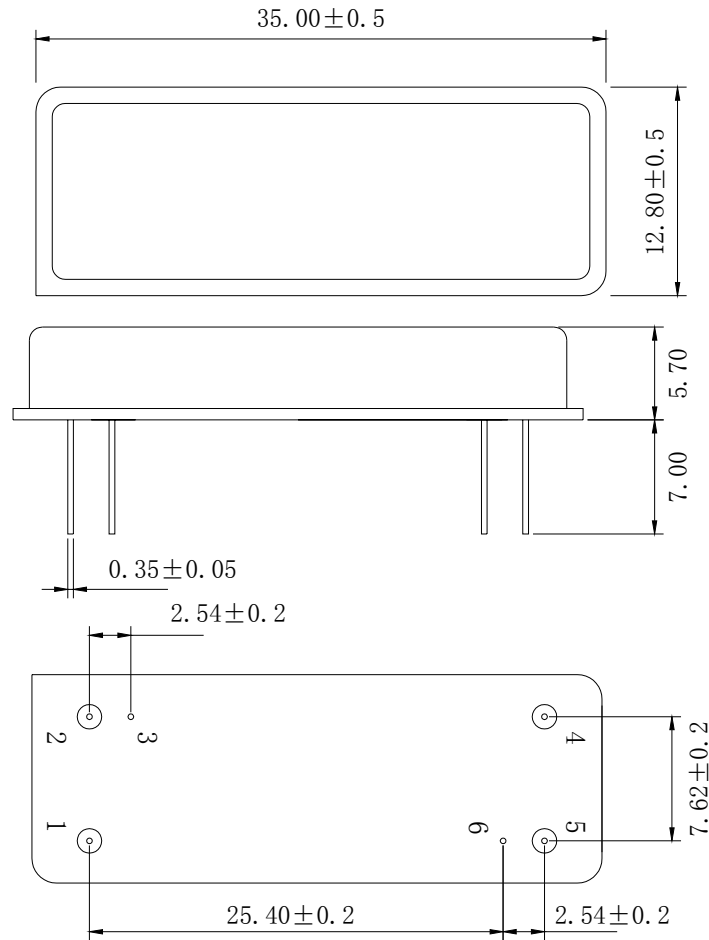


Input:1
Output:5




	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	LBT16035	
		Rev. Date	2005-12-15	
		Rev.	1.0	Page

Typical Performance

Frequency Respond

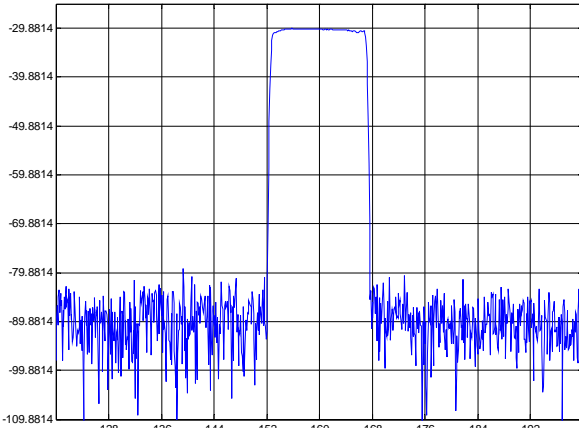

Passband Respond

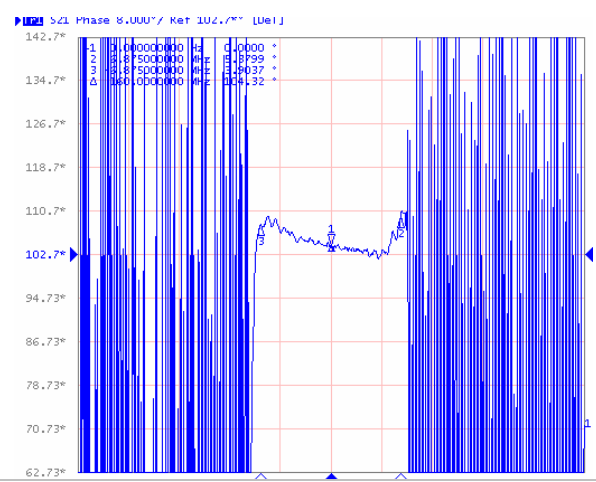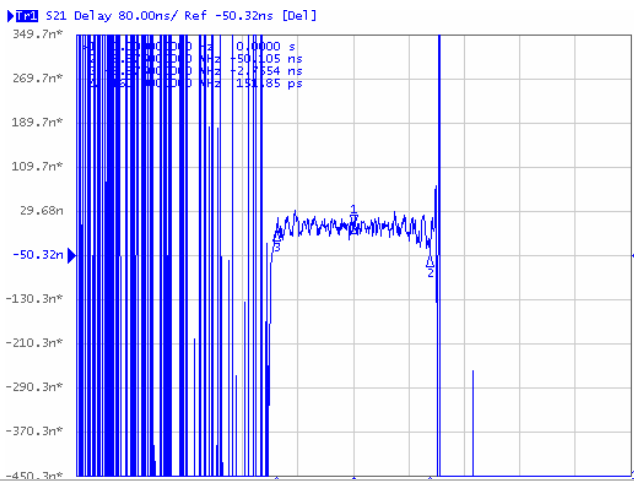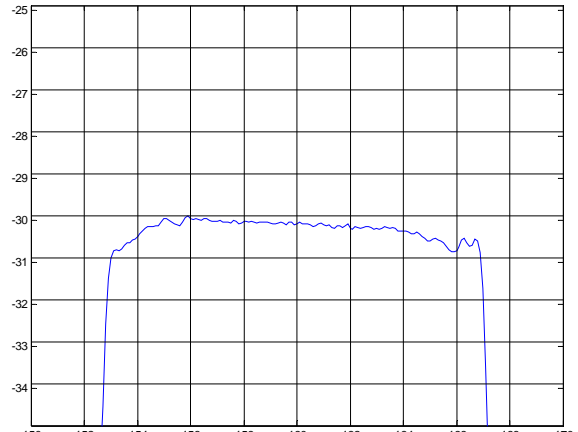

SIPAT Co., Ltd.
(CETC No. 26 Research Institute)
Nanping Huayuan Road No. 14
Chongqing, China, 400060

Part Number	LBT16035	
Rev. Date	2005-12-15	
Rev.	1.0	Page 3/3