

# **TDA9983A**

HDMI transmitter up to 150 MHz pixel rate with 3  $\times$  8-bit video inputs and 4  $\times$  I²S-bus with S/PDIF

Rev. 01 — 13 March 2008

**Product short data sheet** 



## 1. General description

The TDA9983A is an HDMI transmitter (which also supports DVI) that enables a  $3\times8$ -bit RGB or YC<sub>B</sub>C<sub>R</sub> video stream (with a pixel rate up to 150 MHz for the TDA9983AHW/15 version), up to 4 I<sup>2</sup>S-bus audio streams (with an audio sampling rate up to 192 kHz) and the additional information required by all the HDMI 1.2a standards.

A programmable upscaling block enables a 720p/1080i output from a standard definition input. An intrafield deinterlacer is included in the scaler.

In order to be compatible with most applications, the TDA9983A integrates a full programmable input formatter and color space conversion block. The video input formats accepted are YC<sub>B</sub>C<sub>R</sub> 4 : 4 : 4 (up to  $3 \times 8$ -bit), YC<sub>B</sub>C<sub>R</sub> 4 : 2 : 2 semi-planar (up to  $2 \times 12$ -bit), YC<sub>B</sub>C<sub>R</sub> 4 : 2 : 2 compliant with ITU656 and ITU656-like (up to  $1 \times 12$ -bit).


For ITU656-like formats, double edges are supported so that data can be sampled on rising and falling edges.

The TDA9983A also includes a HDCP 1.1 compliant cipher block. The HDCP key set is stored internally in a One Time Programming (OTP) non-volatile memory for maximum security.

The device can be controlled via an I<sup>2</sup>C-bus interface.



#### 150 MHz pixel rate HDMI transmitter

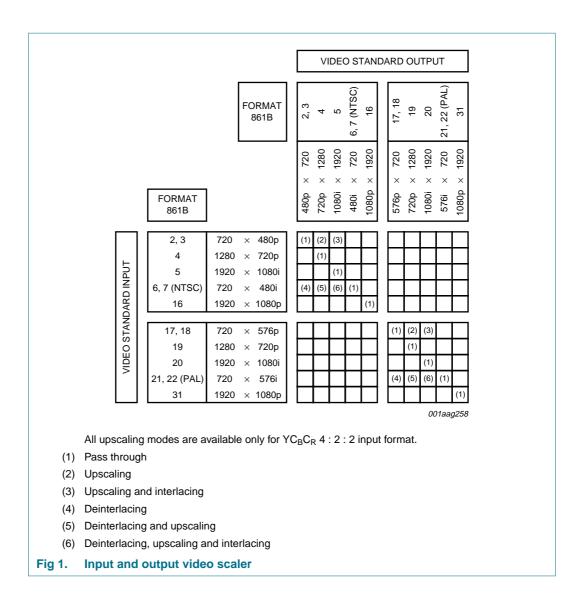

#### 2. Features

- 3 × 8-bit video data input bus, CMOS and LV-TTL compatible
- Horizontal synchronization, vertical synchronization and Data Enable (DE) inputs or VREF, HREF and FREF could be used for input data synchronization
- Pixel rate clock input can be made active on one or both edges (selectable by I<sup>2</sup>C-bus)
- The TDA9983A has 4 I<sup>2</sup>S-bus audio input channels and 1 S/PDIF channel; audio sampling rate up to 192 kHz
- 250 MHz to 1.50 GHz HDMI transmitter operation
- Programmable input formatter and upsampler/interpolator allows input of any of the 4:4:4,4:2:2 semi-planar, 4:2:2 ITU656 and ITU656-like formats
- Programmable color space converter:
  - ◆ RGB to YC<sub>B</sub>C<sub>R</sub>
  - ◆ YC<sub>B</sub>C<sub>R</sub> to RGB

#### 150 MHz pixel rate HDMI transmitter

- The upscaler enables a 720p/1080i output from a standard definition input using intelligent edge interpolation
- Deals with multiple levels of HDCP receivers and repeaters
- Internal SHA-1 calculation
- Controllable via I<sup>2</sup>C-bus
- Low power dissipation
- 1.8 V and 3.3 V power supplies
- Power-down mode
- Hard reset

## 3. Applications

- DVD players and recorders
- Set-Top Box (STB)
- AV receivers and amplifiers (repeater)
- Camcorders
- Digital still cameras
- Media players
- PVRs
- Media centers PCs, graphics add-in boards, notebook PCs
- Switches

### 4. Quick reference data

#### Table 1. Quick reference data

$$\begin{split} &V_{DDA(FRO\_3V3)} = 3.0 \text{ V to } 3.6 \text{ V; } V_{DDA(PLL\_3V3)} = 3.0 \text{ V to } 3.6 \text{ V; } V_{DDH(3V3)} = 3.0 \text{ V to } 3.6 \text{ V; } \\ &V_{DDD(3V3)} = 3.0 \text{ V to } 3.6 \text{ V; } V_{DDC(1V8)} = 1.65 \text{ V to } 1.95 \text{ V; } V_{PP} = 0 \text{ V; } T_{amb} = 0 ^{\circ}\text{C to } 70 ^{\circ}\text{C}. \\ &Typical \text{ values are measured at } V_{DDA(FRO\_3V3)} = V_{DDA(PLL\_3V3)} = V_{DDH(3V3)} = V_{DDD(3V3)} = 3.3 \text{ V; } V_{DDC(1V8)} = 1.8 \text{ V; } V_{PP} = 0 \text{ V and } T_{amb} = 25 ^{\circ}\text{C; unless otherwise specified.} \end{split}$$

| Symbol                    | Parameter Conditio                                  |            |            | Min  | Тур | Max  | Unit |
|---------------------------|---|------------|------------|------|-----|------|------|
| TDA9983AHW                | TDA9983AHW/8 and TDA9983AHW/15                      |            |            |      |     |      |      |
| V <sub>DDA(FRO_3V3)</sub> | free running oscillator 3.3 V analog supply voltage |            |            | 3.0  | 3.3 | 3.6  | V    |
| V <sub>DDA(PLL_3V3)</sub> | PLL 3.3 V analog supply voltage                     |            |            | 3.0  | 3.3 | 3.6  | V    |
| V <sub>DDD(3V3)</sub>     | digital supply voltage (3.3 V)                      |            |            | 3.0  | 3.3 | 3.6  | V    |
| V <sub>DDH(3V3)</sub>     | HDMI supply voltage (3.3 V)                         |            |            | 3.0  | 3.3 | 3.6  | V    |
| V <sub>DDC(1V8)</sub>     | core supply voltage (1.8 V)                         |            |            | 1.65 | 1.8 | 1.95 | V    |
| T <sub>amb</sub>          | ambient temperature                                 |            |            | 0    | -   | 70   | °C   |
| TDA9983AHW                | 1/8; up to 81 MHz                                   |            |            |      |     |      |      |
| f <sub>clk(max)</sub>     | maximum clock frequency                             |            | [1][2]     | 81   | -   | -    | MHz  |
| P <sub>cons</sub>         | power consumption                                   |            | <u>[1]</u> | -    | 329 | -    | mW   |
|                           |   | worst case | [2]        | -    | 343 | 512  | mW   |
| P <sub>tot</sub>          | total power dissipation                             |            | <u>[1]</u> | -    | 463 | -    | mW   |
|                           |   | worst case | [2]        | -    | 477 | 661  | mW   |

#### 150 MHz pixel rate HDMI transmitter

Table 1. Quick reference data ...continued

$$\begin{split} &V_{DDA(FRO\_3V3)} = 3.0 \text{ V to } 3.6 \text{ V; } V_{DDA(PLL\_3V3)} = 3.0 \text{ V to } 3.6 \text{ V; } V_{DDH(3V3)} = 3.0 \text{ V to } 3.6 \text{ V; } \\ &V_{DDD(3V3)} = 3.0 \text{ V to } 3.6 \text{ V; } V_{DDC(1V8)} = 1.65 \text{ V to } 1.95 \text{ V; } V_{PP} = 0 \text{ V; } T_{amb} = 0 \text{ °C to } 70 \text{ °C.} \\ &Typical \text{ values are measured at } V_{DDA(FRO\_3V3)} = V_{DDA(PLL\_3V3)} = V_{DDH(3V3)} = V_{DDD(3V3)} = 3.3 \text{ V; } V_{DDC(1V8)} = 1.8 \text{ V; } V_{PP} = 0 \text{ V and } T_{amb} = 25 \text{ °C; unless otherwise specified.} \end{split}$$

| Symbol                | Parameter                            | Conditions | Min     | Тур  | Max  | Unit |
|-----------------------|--------------------------------------|------------|---------|------|------|------|
| $P_{pd}$              | power dissipation in power-down mode |            | -       | 13.5 | 38.4 | mW   |
| TDA9983AHW            | /15; up to 150 MHz                   |            |         |      |      |      |
| f <sub>clk(max)</sub> | maximum clock frequency              |            | [3] 150 | -    | -    | MHz  |
| P <sub>cons</sub>     | power consumption                    |            | [3]     | 361  | 583  | mW   |
| P <sub>tot</sub>      | total power dissipation              |            | [3]     | 495  | 732  | mW   |
| $P_{pd}$              | power dissipation in power-down mode |            | -       | 13.5 | 38.4 | mW   |

- [1] Video format:
  - a) Input 480p (ITU656 embedded sync, rising edge)
  - b) Output 1080i (YC<sub>B</sub>C<sub>R</sub> 4:2:2)
- [2] Worst case video format:
  - a) Input 480p (YC<sub>B</sub>C<sub>R</sub> 4:2:2 semi-planar)
  - b) Output 720p (YC<sub>B</sub>C<sub>R</sub> 4 : 2 : 2)
- [3] Video format:
  - a) Input 1080p (RGB 4: 4: 4 external sync, rising edge)
  - b) Output 1080p (RGB 4:4:4)

# 5. Ordering information

Table 2. Ordering information


| Type number | Package |   |          |
|-------------|---------|---|----------|
|             | Name    | Description   | Version  |
| TDA9983AHW  | HTQFP80 | plastic thermal enhanced thin quad flat package; 80 leads; body $12 \times 12 \times 1$ mm; exposed die pad | SOT841-4 |

## 5.1 Ordering options

Table 3. Survey of type numbers

| Extended type number | Sampling frequency (Msample/s) | Application               |
|----------------------|--------------------------------|---------------------------|
| TDA9983AHW/8/C1xx    | 81                             | customer specific version |
| TDA9983AHW/15/C1xx   | 150                            | customer specific version |

150 MHz pixel rate HDMI transmitter

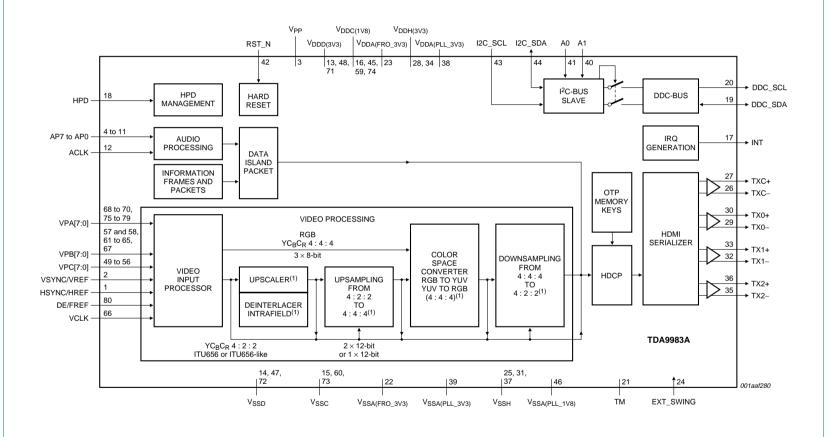

(1) Block can be bypassed.

**Block diagram** 

© NXP B.V. 2008. All rights reserved

Product short data TDA9983A\_SDS\_1

sheet

Rev.

. 9

3

March 2008

#### 150 MHz pixel rate HDMI transmitter


# 7. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

| Symbol                 | Parameter                       | Conditions | Min   | Max   | Unit |
|------------------------|---------------------------------|------------|-------|-------|------|
| $V_{DD(3V3)}$          | supply voltage (3.3 V)          |            | -0.5  | +4.6  | V    |
| $V_{DD(1V8)}$          | supply voltage (1.8 V)          |            | -0.5  | +2.5  | V    |
| $\Delta V_{\text{DD}}$ | supply voltage difference       |            | -0.5  | +0.5  | V    |
| T <sub>stg</sub>       | storage temperature             |            | -55   | +150  | °C   |
| T <sub>amb</sub>       | ambient temperature             |            | 0     | 70    | °C   |
| T <sub>j</sub>         | junction temperature            |            | -     | 125   | °C   |
| V <sub>esd</sub>       | electrostatic discharge voltage | HBM        | -1500 | +1500 | V    |

# 8. Application information

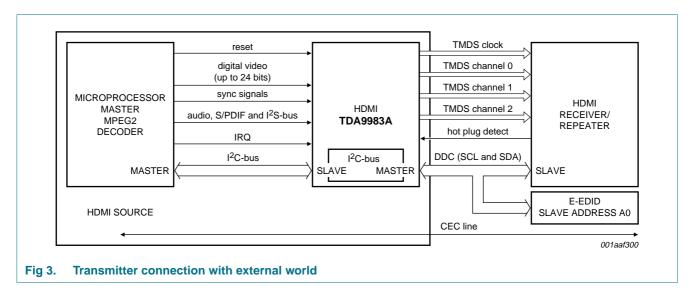

## 9. Abbreviations

Table 5. Abbreviations

| Acronym | Description                               |
|---------|---|
| CMOS    | Complementary Metal-Oxide Semiconductor   |
| DDC     | Display Data Channel                      |
| DVI     | Digital Visual Interface                  |
| HDCP    | High-bandwidth Digital Content Protection |
| HBM     | Human Body Model                          |
| HDMI    | High-Definition Multimedia Interface      |
| HPD     | Hot Plug Detect                           |
| IRQ     | Interrupt ReQuest                         |
| LV-TTL  | Low-Voltage Transistor-Transistor Logic   |
| OTP     | One-Time Programmable                     |

TDA9983A\_SDS\_1 © NXP B.V. 2008. All rights reserved.

## 150 MHz pixel rate HDMI transmitter

 Table 5.
 Abbreviations ...continued

| Acronym   | Description  |
|-----------|--|
| RGB       | Red, Green, Blue                                   |
| SHA-1     | Secure Hash Algorithm 1                            |
| S/PDIF    | Sony/Philips Digital Interface                     |
| $YC_BC_R$ | color space originally defined by the ITU-R BT.601 |
| YUV       | color space used by the NTSC and PAL systems       |

# 10. Revision history

#### Table 6. Revision history

| Document ID    | Release date | Data sheet status        | Change notice | Supersedes |
|----------------|--------------|--------------------------|---------------|------------|
| TDA9983A_SDS_1 | 20080313     | Product short data sheet | -             | -          |

#### 150 MHz pixel rate HDMI transmitter

## 11. Legal information

#### 11.1 Data sheet status

| Document status[1][2]          | Product status[3] | Definition  |
|--------------------------------|-------------------|---|
| Objective [short] data sheet   | Development       | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet | Qualification     | This document contains data from the preliminary specification.                       |
| Product [short] data sheet     | Production        | This document contains the product specification.                                     |

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

#### 11.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

#### 11.3 Disclaimers

**General** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental

damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nxp.com/profile/terms">http://www.nxp.com/profile/terms</a>, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

### 11.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

I<sup>2</sup>C-bus — logo is a trademark of NXP B.V.

## 12. Contact information

For more information, please visit: http://www.nxp.com

For sales office addresses, please send an email to: salesaddresses@nxp.com

TDA9983A\_SDS\_1 © NXP B.V. 2008. All rights reserved.

### 150 MHz pixel rate HDMI transmitter

## 13. Contents

| 1    | General description       |
|------|---------------------------|
| 2    | Features                  |
| 3    | Applications              |
| 4    | Quick reference data 3    |
| 5    | Ordering information      |
| 5.1  | Ordering options4         |
| 6    | Block diagram 5           |
| 7    | Limiting values 6         |
| 8    | Application information 6 |
| 9    | Abbreviations6            |
| 10   | Revision history 7        |
| 11   | Legal information 8       |
| 11.1 | Data sheet status 8       |
| 11.2 | Definitions 8             |
| 11.3 | Disclaimers               |
| 11.4 | Trademarks 8              |
| 12   | Contact information 8     |
| 13   | Contents                  |

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.



© NXP B.V. 2008.

All rights reserved.

For more information, please visit: http://www.nxp.com For sales office addresses, please send an email to: salesaddresses@nxp.com