
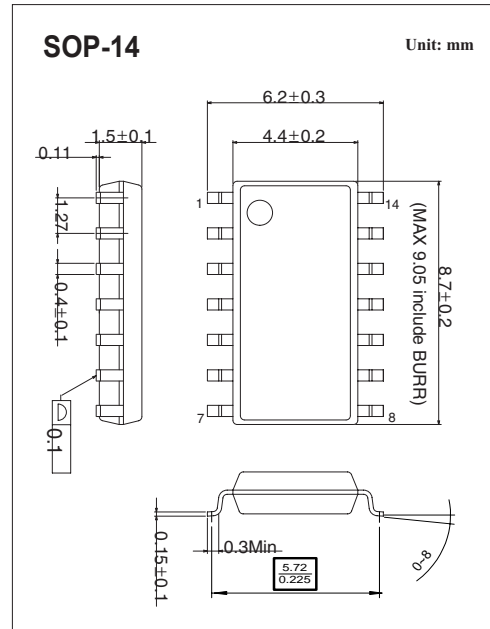
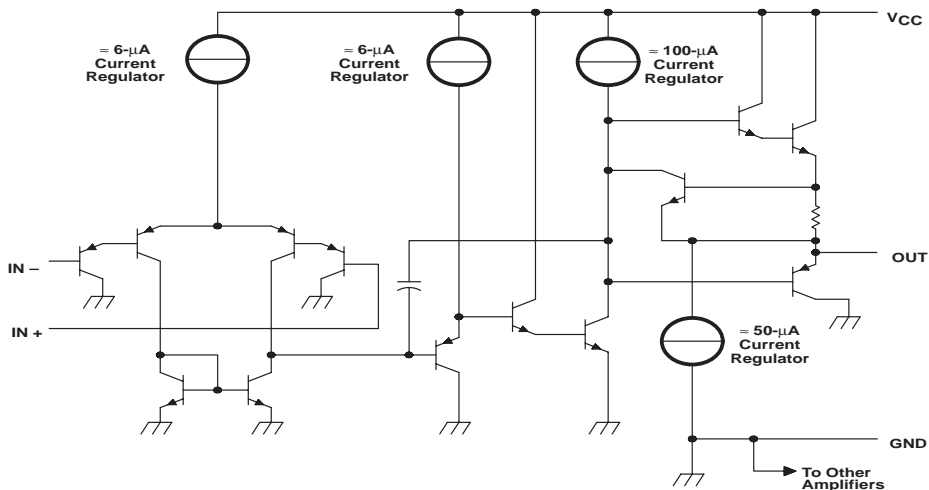


Features

- 2-kV ESD Protection (K-Suffix Devices)
- Wide Supply Range:
 - Single Supply . . . 3 V to 32 V
 - or Dual Supplies . . . ± 1.5 V to ± 16 V
- Low Supply-Current Drain Independent of Supply Voltage . . . 0.8 mA Typ
- Common-Mode Input Voltage Range Includes Ground, Allowing Direct Sensing Near Ground
- Low Input Bias and Offset Parameters:
 - Input Offset Voltage . . . 3 mV Typ
 - A Versions . . . 2 mV Typ
 - Input Offset Current . . . 2 nA Typ
 - Input Bias Current . . . 20 nA Typ
 - A Versions . . . 15 nA Typ
- Differential Input Voltage Range Equal to Maximum-Rated Supply Voltage . . . 32 V
- Open-Loop Differential Voltage Amplification . . . 100 V/mV Typ
- Internal Frequency Compensatio



■ schematic (each amplifier)



■ Absolute maximum ratings over operating free-air temperature range

| Parameter | Rating | Unit |
|---|------------|---------------------------|
| Supply voltage, V_{CC} *1 | 32 | V |
| Differential input voltage, V_{ID} *2 | ± 32 | V |
| Input voltage, V_I (either input) | -0.3 to 32 | V |
| Duration of output short circuit (one amplifier) to ground at (or below) $T_A = 25^\circ\text{C}, V_{CC} \leq 15\text{ V}$ *3 | Unlimited | |
| Package thermal impedance, θ_{JA} *4 | 76 | $^\circ\text{C}/\text{W}$ |
| Operating virtual junction temperature, T_J | 150 | $^\circ\text{C}$ |
| Storage temperature range, T_{stg} | -65 to 150 | $^\circ\text{C}$ |
| Charged-Device Model | ± 2 | kV |

*1 All voltage values (except differential voltages and V_{CC} specified for the measurement of I_{OS}) are with respect to the network GND.

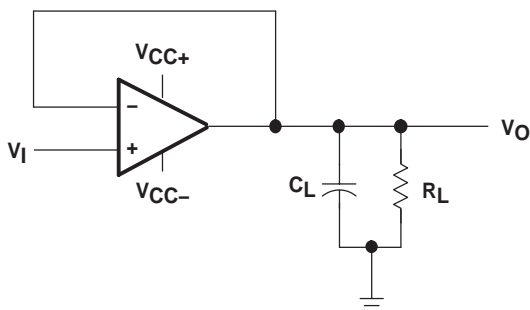
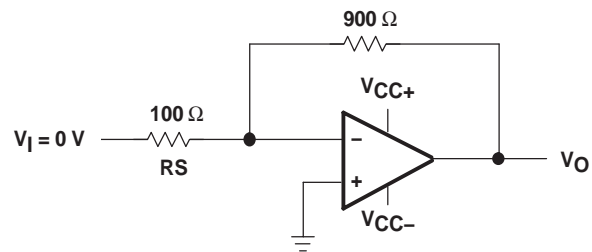
*2 Differential voltages are at $IN+$, with respect to $IN-$.

*3 Short circuits from outputs to V_{CC} can cause excessive heating and eventual destruction.

*4 Maximum power dissipation is a function of $T_{J(max)}$, θ_{JA} , and T_A . The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_{J(max)} - T_A) / \theta_{JA}$.
Operating at the absolute maximum T_J of 150°C can affect reliability.

■ Operating conditions, $V_{CC} = \pm 15\text{ V}$, $T_A = 25^\circ\text{C}$

| Parameter | Symbol | Test conditions | Typ | Unit |
|--------------------------------|--------|--|-----|------------------------------|
| Slew rate at unity gain | SR | $R_L = 1\text{ M}\Omega$, $C_L = 30\text{ pF}$, $V_I = \pm 10\text{ V}$ (see Figure 1) | 0.5 | $\text{V}/\mu\text{s}$ |
| Unity-gain bandwidth | B_1 | $R_L = 1\text{ M}\Omega$, $C_L = 20\text{ pF}$ (see Figure 1) | 1.2 | MHz |
| Equivalent input noise voltage | V_n | $R_S = 100\Omega$, $V_I = 0\text{ V}$, $f = 1\text{ kHz}$ (see Figure 2) | 35 | $\text{nV}/\sqrt{\text{Hz}}$ |


Figure 1. Unity-Gain Amplifier

Figure 2. Noise-Test Circuit

■ Electrical characteristics at specified free-air temperature, V_{CC} = 5 V (unless otherwise noted)

| Parameter | Symbol | T _A *2 | Testconditons *1 | Min | Typ *3 | Max | Unit |
|--|----------------------------------|-------------------|---|---------------------------|--------|------|------|
| Input offset voltage | V _{IO} | 25°C | V _{CC} = 5 V to MAX, V _{IC} = V _{ICRmin} , V _O = 1.4 V | | 3 | 7 | mV |
| | | Full range | | | | 9 | |
| Input offset current | I _{IO} | 25°C | V _O = 1.4 V | | 2 | 50 | nA |
| | | Full range | | | | 150 | |
| Input bias current | I _{IB} | 25°C | V _O = 1.4 V | | -20 | -250 | nA |
| | | Full range | | | | -500 | |
| Common-mode input voltage range | V _{ICR} | 25°C | V _{CC} = 5 V to MAX | 0 to V _{CC} -1.5 | | | V |
| | | Full range | | 0 to V _{CC} -2 | | | V |
| High-level output voltage | V _{OH} | 25°C | R _L = 2 kΩ | V _{CC} -1.5 | | | V |
| | | 25°C | R _L = 10 kΩ | | | | |
| | | Full range | V _{CC} = MAX, R _L = 2 kΩ | 26 | | | |
| | | Full range | V _{CC} = MAX, R _L ≥ 10 kΩ | 27 | 28 | | |
| Low-level output voltage | V _{OL} | Full range | R _L ≤ 10 kΩ | | 5 | 20 | mV |
| Large-signal differential voltage amplification | A _{VD} | 25°C | V _{CC} = 15 V, V _O = 1 V to 11 V, R _L ≥ 2 kΩ | 25 | 100 | | V/mV |
| | | Full range | | 15 | | | |
| Common-mode rejection ratio | C _{MRR} | 25°C | V _{IC} = V _{ICRmin} | 65 | 80 | | dB |
| Supply-voltage rejection ratio (ΔV _{CC} /ΔV _{IO}) | k _{SVR} | 25°C | | 65 | 100 | | dB |
| Crosstalk attenuation | V _{O1} /V _{O2} | 25°C | f = 1 kHz to 20 kHz | | 120 | | dB |
| Output current | I _O | 25°C | Source V _{CC} = 15 V, V _{ID} = 1 V, V _O = 0 | -20 | -30 | -60 | mA |
| | | Full range | 0 | -10 | | | |
| | | 25°C | Sink V _{CC} = 15 V, V _{ID} = -1 V, V _O = 15 V | 10 | 20 | | |
| | | Full range | V | 5 | | | |
| | | 25°C | V _{ID} = -1 V, V _O = 200 mV | 12 | 30 | | μA |
| Short-circuit output current | I _{OS} | 25°C | V _{CC} at 5 V, G _{ND} at -5 V, V _O = 0, | | ±40 | 60 | mA |
| Supply current (four amplifiers) | I _{CC} | Full range | V _O = 2.5 V, No load | | 0.7 | 1.2 | mA |
| | | Full range | V _{CC} = MAX, V _O = 0.5 V _{CC} , No load | | 1.4 | 3 | |

*1 All characteristics are measured under open-loop conditions, with zero common-mode input voltage, unless otherwise specified.

*2 for 2 0°C to 70°C

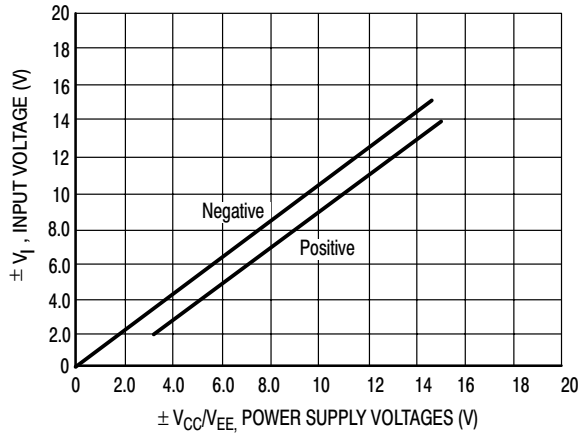
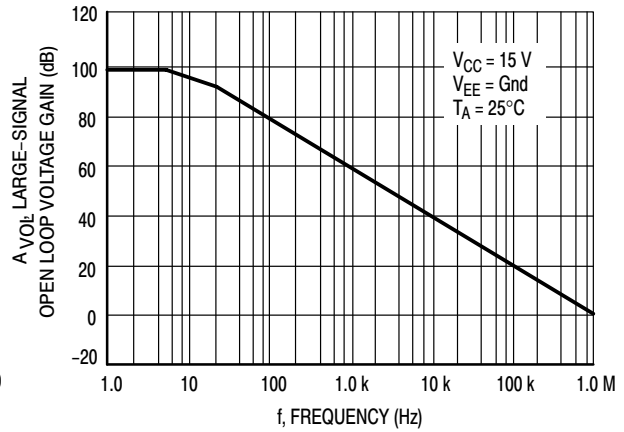
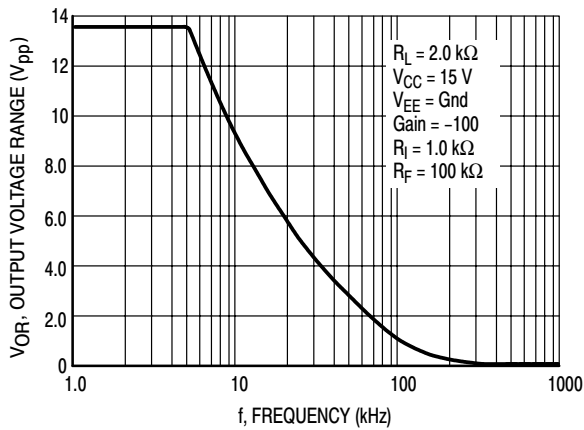
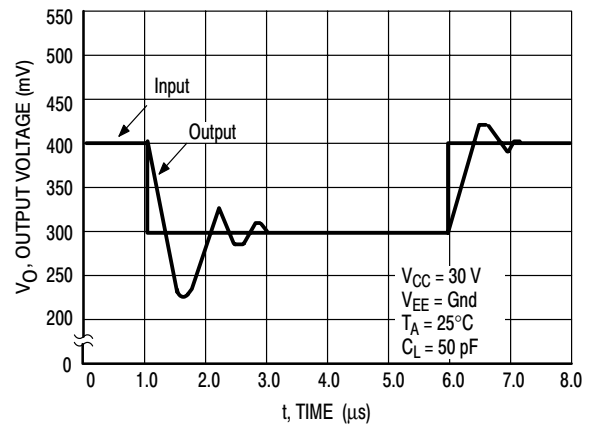
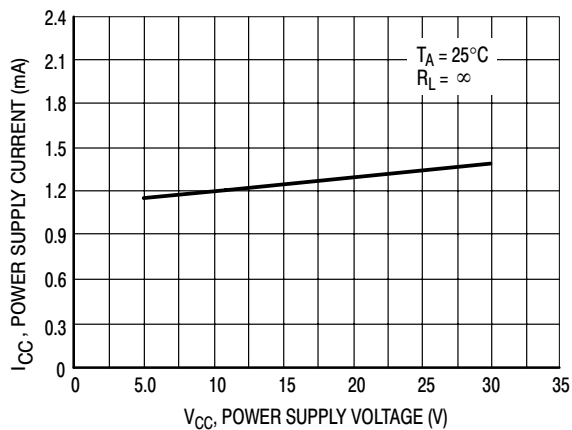
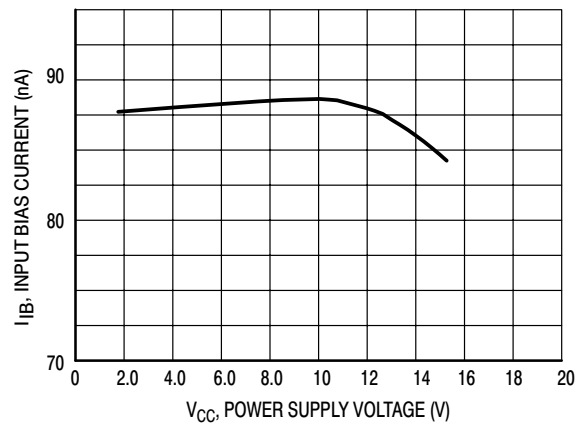
*3 All typical values are at T_A = 25°C.

■ Marking

| | |
|---------|-------|
| Marking | LM324 |
|---------|-------|

■ Ordering Information

| Deviece | Packaging | Shipping |
|---------|-----------|----------------|
| LM324 | SOP14 | 2500/Tape&Reel |

■ TypIacl Characteristics

Figure 4. Input Voltage Range

Figure 5. Open Loop Frequency

Figure 6. Large-Signal Frequency Response

Figure 7. Small-Signal Voltage Follower Pulse Response (Noninverting)

Figure 8. Power Supply Current versus Power Supply Voltage

Figure 9. Input Bias Current versus Power Supply Voltage