
# ULTRA MINIATURE 2-POLES 2A (LOW PROFILE SIGNAL RELAY) FTR-B3 SERIES ROHS compliant

#### FEATURES



- DPDT 2C
- Ultra miniature low profile relay with high heat resistant material
- Height: 5.45mm, Weight: 0.85g, Mounting space: 87mm<sup>2</sup>
- Adopted superior contact spring for high frequency characteristic
- Comply with Telcordia / FCC standard
  - Isolation distance: min. 1.6mm
  - Dielectric strength between coil and contact: 1500VAC
  - Surge strength: 2500V
- Low power: Non-latch: 140mW (230mW at 24V) Latch: 100mW (120mW at 24V)
- High reliable bifurcated gold overlay silver contact
- UL, CSA recognized. Confirms to IEC 60950, UL1950, EN60950. Spacing & high breakdown voltage (Basic insulation, 150 working volts, pollution degree 2).
- RoHS compliant since date code: 0431B8 Please see page 11 and 12 for more information



#### ORDERING INFORMATION

[[].vov	$\frac{\text{FTR-B3}}{(a)}  \frac{\text{G}}{(b)}  \frac{\text{B}}{(a)}  \frac{012}{(a)}  \frac{\text{Z}}{(a)}$	
[Exar	nple] (a) (b) (c) (d) (e)	) (f) (g)
(a)	Series Name	FTR-B3 series
(b)	Terminal Type	C: through hole G: surface mount S: surface mount, space saving
(C)	Operation Function	A: standard type B: latching type (1 coil)
(d)	Rated voltage of coil	1.5 : 1.5 VDC 009 : 9VDC   003 : 3VDC 012: 12 VDC   4.5 : 4.5VDC 024 : 24VDC   006: 6VDC 000
(e)	Contact material	Z: gold overlay silver nickel (standard) P: gold overlay silver palladium
(f)	Relay enclosing direction*	B: standard enclosing direction
(g)	Number of relays per reel*	10: 1,000 (standard)

Actual marking: B3GA012Z

Remarks: Actual marking on relay would not carry code FTR and be as below:

Ordering code: FTR-B3GA012Z-B10

- Only surface mount types (G and S) are applicable

- All relays are packaged in tubes unles P/N ends with -B10

#### PART NUMBERS

#### Standard type

Note: \*:

Ordering Part Number	Series	Terminal Type	Operation	Coil Voltage	Contact Material
FTR-B3CA1.5Z	_			1.5	
FTR-B3CA003Z				3	
FTR-B3CA4.5Z				4.5	
FTR-B3CA006Z		C: through hole		6	
FTR-B3CA009Z		noie		9	
FTR-B3CA012Z				12	
FTR-B3CA024Z				24	
FTR-B3GA1.5Z				1.5	Z: Au-Ag-Ni P: Au-Ag-Pd
FTR-B3GA003Z				3	
FTR-B3GA4.5Z		G: surface mount	A: mono-stable (standard type)	4.5	
FTR-B3GA006Z	FTR-B3			6	
FTR-B3GA009Z				9	
FTR-B3GA012Z				12	
FTR-B3GA024Z				24	
FTR-B3SA1.5Z				1.5	
FTR-B3SA003Z				3	
FTR-B3SA4.5Z	-	S: space sav-		4.5	
FTR-B3SA006Z		ing surface		6	
FTR-B3SA009Z		mount		9	
FTR-B3SA012Z				12	
FTR-B3SA024Z				24	

Latching type (1 coil)

Ordering Part Number	Series	Terminal Type	Operation	Coil Voltage	Contact Material
FTR-B3CB1.5Z				1.5	
FTR-B3CB003Z		C: through hole		3	
FTR-B3CB4.5Z				4.5	
FTR-B3CB006Z				6	
FTR-B3CB009Z		noic		9	
FTR-B3CB012Z				12	
FTR-B3CB024Z				24	
FTR-B3GB1.5Z				1.5	
FTR-B3GB003Z			B: latching	3	Z: Au-Ag-Ni P: Au-Ag-Pd
FTR-B3GB4.5Z		G: surface mount		4.5	
FTR-B3GB006Z	FTR-B3			6	
FTR-B3GB009Z				9	
FTR-B3GB012Z				12	
FTR-B3GB024Z				24	
FTR-B3SB1.5Z				1.5	
FTR-B3SB003Z				3	
FTR-B3SB4.5Z		S: space sav- ing surface		4.5	
FTR-B3SB006Z				6	
FTR-B3SB009Z		mount		9	
FTR-B3SB012Z				12	
FTR-B3SB024Z				24	

#### COIL DATA CHART

#### Standard type

Coil Voltage	Nominal Voltage (VDC)	Max. Coil Voltage* <sup>1</sup>	Coil Resistance ( ±10%)	Must Operate Voltage* <sup>2</sup>	Must Release Voltage* <sup>2</sup>	Nominal Power (mW)
1.5	1.5	3.53 VDC	16.1 Ω	1.13 VDC	0.15 VDC	
003	3	7.05 VDC	64.3 Ω	2.25 VDC	0.3 VDC	
4.5	4.5	10.58 VDC	145 Ω	3.38 VDC	0.45 VDC	140
006	6	14.10 VDC	257 Ω	4.5 VDC	0.6 VDC	140
009	9	21.15 VDC	579 Ω	6.75 VDC	0.9 VDC	
012	12	28.20 VDC	1,028 Ω	9.0 VDC	1.2 VDC	
024	24	56.40 VDC	2,504 Ω	18.0 VDC	2.4 VDC	230

Latching type (1 coil)

Coil Voltage	Nominal Voltage (VDC)	Max. Coil Voltage* <sup>1</sup>	Coil Resistance ( ±10%)	Must Operate Voltage* <sup>2</sup>	Must Release Voltage* <sup>2</sup>	Nominal Power (mW)
1.5	1.5	3.53 VDC	22.5 Ω	1.13 VDC	-0.13 VDC	
003	3	7.05 VDC	90 Ω	2.25 VDC	-2.25 VDC	
4.5	4.5	10.58 VDC	203 Ω	3.38 VDC	-3.38 VDC	100
006	6	14.10 VDC	360 Ω	4.5 VDC	-4.5 VDC	100
009	9	21.15 VDC	810 Ω	6.75 VDC	-6.75 VDC	
012	12	28.20 VDC	1,440 Ω	9.0 VDC	-9.0 VDC	
024	24	56.40 VDC	4,800 Ω	18.0 VDC	-18.0 VDC	120

Note: All values in the table are measured at 20°C.

\*1: No contact current at 20°C. Please see 'operating range' data for other conditions.

\*2: Specified values are subject to pulse wave voltage.

#### ■ SPECIFICATIONS

		ltom	Standard Type	Latching Type		
		Item	FTR-B3 ( ) A	FTR-B3 ( ) B		
	Arrangeme	nt	2Form C			
	Contact ma	terial	Gold overlay silver nickel /	Gold overlay silver palladium		
	Contact typ	e	Bifurcated contacts (cross-	bar)		
	Contact res	istance (initial value)	$75m\Omega$ , maximum (6VDC,	1A)		
	Contact rat	ing	30VDC 1A /125VAC 0.3A	(resistive)		
Contact	Maximum c	arrying/switching current	2A			
	Maximum s	witching power	62.5 VA / 30W			
	Maximum s	witching voltage	250 VAC, 220 VDC	250 VAC, 220 VDC		
	Minimum sv	witching load *1	10mVDC, 0.01mA*1			
	Nominal po	wer (at 20°C)	140mW to 230mW	100mW to 120mW		
Coil	Operate po	wer (at 20°C)	80mW to 130mW	57mW to 68mW		
	Operating t	emperature (no frost)	-40° C to +85° C			
Time	Operate (at	nominal voltage, without bounce)	3ms maximum			
Value	Release (at	nominal voltage, without bounce )	3ms maximum			
	Mechanical		50 x 10° ops. min. (at 3Hz)	20 x 10 <sup>6</sup> ops. min. (at 3Hz)		
Life	Electrical (resistive load)		100 x $10^3$ operations min. at 1A 30VDC (at 0.5Hz) 100 x $10^3$ operations min. at 0.3A 125VDC (at 0.5Hz)			
	Vibration resistance	Malfunction	10 to 55 Hz at double amplitude of 3.3mm			
		Endurance	10 to 55 Hz at double amplitude of 5mm			
Other	Shock	Malfunction	Min. 750 m/s²			
	resistance	Endurance	Min. 1000 m/s <sup>2</sup>			
	Weight		Approximately 0.8g			

\*1 Minimum switching loads mentioned above are reference values. Please perform the confirmation test with the actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

#### ■ INSULATION


Item		FTR-B3
Resistance (initial) (500 VDC)		Minimum 1,000 MΩ 1 min.
Dielectric Strength open contacts		1,000 VAC (50/60 Hz) 1 min.
	coil and contacts	1,500 VAC (50/60 Hz) 1 min.
	adjacent contacts	1,000 VAC (50/60 Hz) 1 min.
Surge Voltage (coil and	contact)	2,500 V 2 x 10µs standard wave
Clearance	adjacent contacts	1.0mm
	open contacts	0.28mm
	coil and contacts	1.0mm
Creepage	adjacent contacts	1.0mm
	open contacts	0.28mm
	coil and contacts	1.60mm

#### SAFETY STANDARDS


Туре	Compliance	Contact rating
UL	UL 508 E63615	Flammability: UL 94-V0 (plastics) 0.5A, 125VAC (resistive) 1A, 30VDC (resistive)
CSA	C22.2 No. 14 LR 40304-58	0.3A, 110VDC (resistive) 2A, 30VDC (resistive)


#### CHARACTERISTIC DATA


#### • Standard type Operation




#### Maximum Switching Power









Contact Current (A)



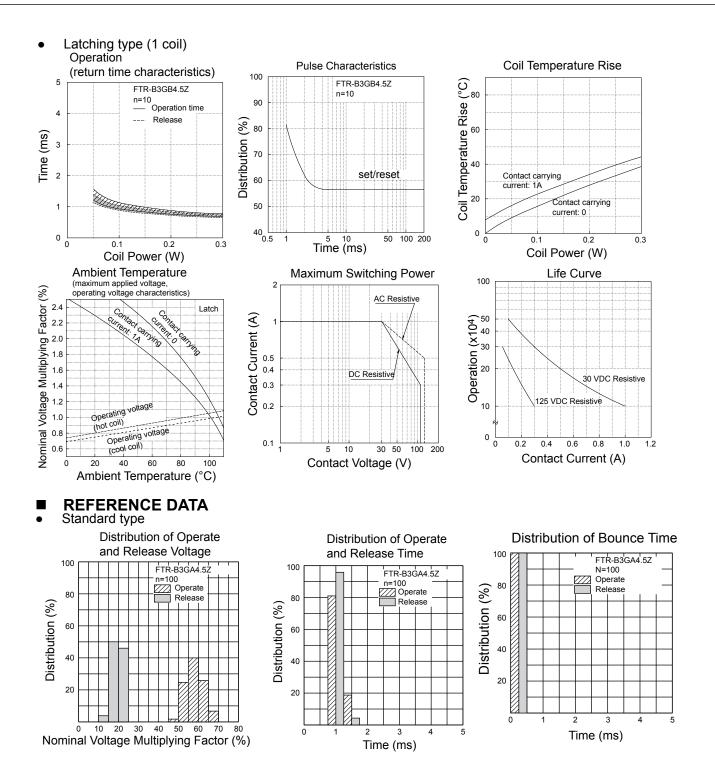


7

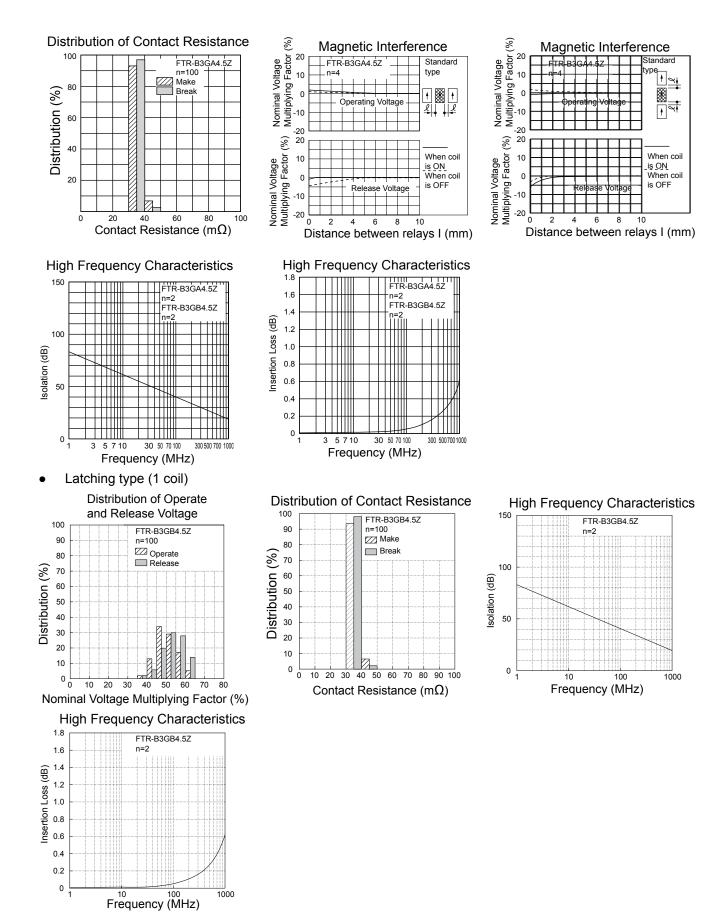


#### DIMENSIONS

FTR-B3C( )( )( ) - Through hole type

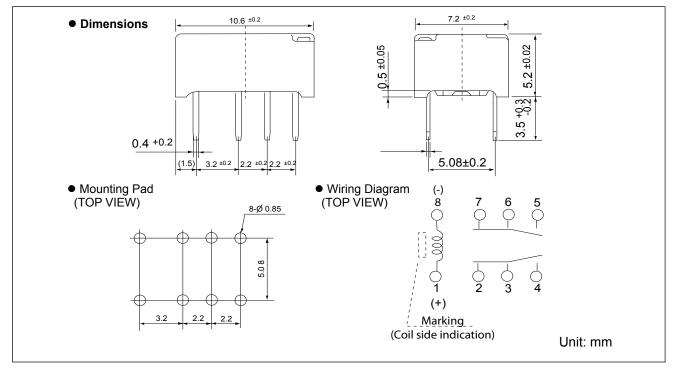


FTR-B3G( )( )( ) - Surface mount type (standard)

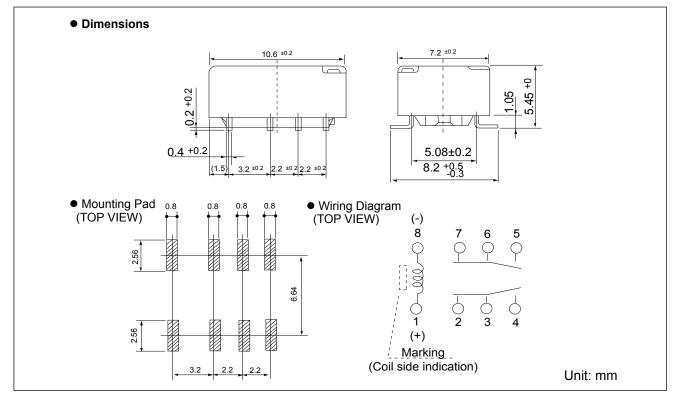

#### DIMENSIONS


FTR-B3S( )( )( ) - Space saving type

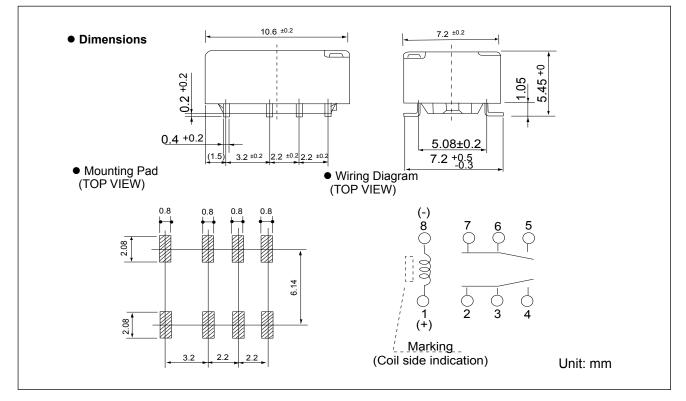

#### PACKAGING SPECIFICATIONS


- Packaging Method
- Packaging Standard: JIS C 0806
- Taping Type: TB 1612
- Reel Type: R16D
- Quantity of 1reel: 1000 pieces


Packaging Orientation Code:B



- (2) Dimensions
- Reel dimensions






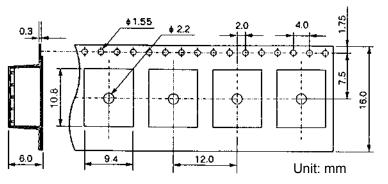

Note: Relays are sold in packs of 1000 pieces, please order 1000 pieces as one unit.

#### RECOMMENDED SOLDERING CONDITIONS FOR SMT (TEMPERATURE PROFILE)

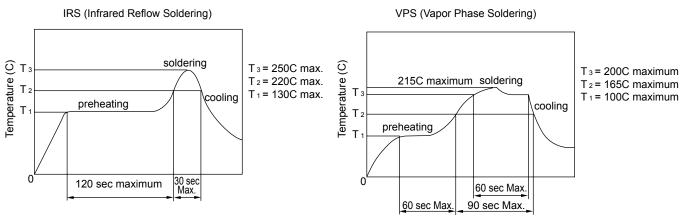

Note: 1.Temperature profiles show the temperature of PC board surface. 2.Please perform soldering test with your actual PC board before mass production, since the temperatures of PC board surfaces vary according to the size of PC board, status of parts mounting and heating method.

#### PRECAUTIONS

- For details on general precautions, refer to the section on technical descriptions.

- Since this is a polarized relay, follow the instructions of the internal wiring diagram for the ± connections of the coil.

- Note that the terminal layout and internal wiring of the surface mount relay are a top view

- SMT versions of the FTR-B3 relays have moisture sensitivity level 3, acc. JEDEC-J-STD-020D

- SMT versions of the FTR-B3 relays will be shipped in "Dry Pack". Relays have an "Out of Bag" storage time of 192h.

### **RoHS Compliance and Lead Free Relay Information**


### 1. General Information

- If applicable, relays produced after the specific date code that is indicated on each data sheet are lead-free now. All of our signal and power relays are lead-free. Please refer to Lead-Free Status Info. (http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf)
- Lead free solder plating currently used in relays is Sn-3.0Ag-0.5Cu. From February 2005 forward Sn-3.0Cu-Ni will be used for the FTR-B3 and FTR-B4 series relays.
- All signal and power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 5 hazardous materials that are restricted by RoHS directive (lead, mercury, chromium IV, PBB, PBDE, decaBDE and PFOS).
- It has been verified that using lead-free relays in leaded assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid lead containing relays (for lead-free sample, etc.) please consult with area sales office.

• We will ship lead containing relays as long as the lead containing relay inventory exists, if allowed. Note: Cadmium was exempted from RoHS on October 21, 2005. (Amendment to Directive 2002/95/EC)

### 2. Recommended Lead Free Solder Profile

 Recommended solder paste Sn-3.0Ag-0.5Cu or Sn-3.0 Cu-Ni (only FTR-B3 and FTR-B4 from February 2005.

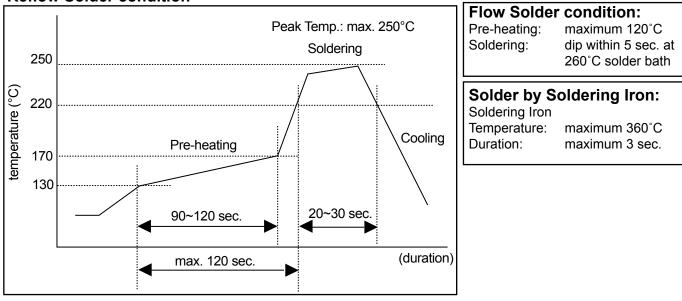

#### **Reflow Solder condition**

We highly recommend that you confirm your actual solder conditions

### 3. Moisture Sensitivity

Moisture Sensitivity Level is not applicable to electromechanical relays.

#### 4. Tin Whisker

 SnAgCu and SnCuNi solder are known as low risk of tin whisker. No considerable whisker length was found by our in-house test.

#### Fujitsu Components International Headquarter Offices

Japan	Europe
Fujitsu Component Limited	Fujitsu Components Europe B.V.
Gotanda-Chuo Building	Diamantlaan 25
3-5, Higashigotanda 2-chome, Shinagawa-ku	2132 WV Hoofddorp
Tokyo 141, Japan	Netherlands
Tel: (81-3) 5449-7010	Tel: (31-23) 5560910
Fax: (81-3) 5449-2626	Fax: (31-23) 5560950
Email: promothq@ft.ed.fujitsu.com	Email: info@fceu.fujitsu.com
Web: www.fcl.fujitsu.com	Web: emea.fujitsu.com/components/
North and South America	Asia Pacific
Fujitsu Components America, Inc.	Fujitsu Components Asia Ltd.
250 E. Caribbean Drive	102E Pasir Panjang Road
Sunnyvale, CA 94089 U.S.A.	#01-01 Citilink Warehouse Complex
Tel: (1-408) 745-4900	Singapore 118529
Fax: (1-408) 745-4970	Tel: (65) 6375-8560
Email: components@us.fujitsu.com	Fax: (65) 6273-3021
Web: http://us.fujitsu.com/relays/	Email: fcal@fcal.fujitsu.com
	Web: http://www.fujitsu.com/sg/services/micro/components/

©2009 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice. Rev. March 5, 2009.