

Spice Model




1N6527



Electrical Characteristics and Maximum Ratings

Part Number	Working Reverse Voltage (V _{rw})	Average Rectified Current (I _o)		Reverse Current @ V _{rw} (I _r)		Forward Voltage (V _f)		1 Cycle Surge Current t _p =8.3ms (I _{fsm})	Repetitive Surge Current (I _{frm})	Reverse Recovery Time (3) (T _{rr})	Thermal Impedance θ _{J-L}			Junction Cap. @50VDC @ 1kHz (C _j)
		55°C(1)	100°C(2)	25°C	100°C	25°C		25°C	25°C	25°C	L=.000	L=.125	L=.250	25°C
	Volts	Amps	Amps	µA	µA	Volts	Amps	Amps	Amps	ns	°C/W	°C/W	°C/W	pF
1N6527	10000	0.100	0.050	0.5	20	12.0	0.10	5	1	70	5	12	21.5	2

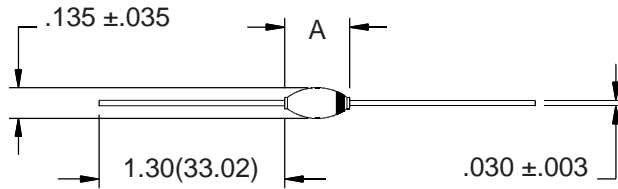

Part	A
1N6521	.220(5.59) MAX. .160(4.06) MIN.
1N6523	.240(6.10) MAX. .180(4.57) MIN.
1N6525	.260(6.60) MAX. .200(5.08) MIN.
1N6527	.320(8.13) MAX. .260(6.60) MIN.

Name	Parameter	Value	Units
IS	Reverse leakage current	2.50E-07	Amps
N	Emission coefficient	38.4	
T	Temperature	25	C
RS	Diode series resistance	1.8	Ohm
TT	Transit time	70	nS
CJ0	Zero-bias junction capacitance	1.45	pF
VJ	Bulk junction potential	17.06	Volts
M	Grading coefficient	0.5	
EG	Energy-band gap	1.11	Volts
XTI	Temperature coefficient	3	
KF	Flicker-noise coefficient	0	
AF	Flicker-noise exponent	1	
FC	Coefficient for capacitance	0.5	
BV	Diode breakdown voltage	12000	Volts
IBV	Diode breakdown current	100	uAmps

Dimensions: In. (mm) * All temperatures are ambient unless otherwise noted. * Data subject to change without notice.



Voltage Multipliers, Inc.
8711 W. Roosevelt Ave.
Visalia, CA 93291

Tel (559) 651-1402
Fax (559) 651-0740
www.voltagemultipliers.com