

Clock generator for digital still camera

BU2382FV

BU2382FV is a high-performance 2-channel PLL IC. PLL circuit generates necessary clocks by inputting standard clocks of crystal oscillator from outside. Changing a connection of wire can generate any clocks required for any applications of users. Jitter and S/N characteristic has achieved almost the same high-quality sound and vision as oscillating module because of optimization of PLL. Frequency can be changed by the internal dividing control.


●Applications

Digital still camera

●Features

- 1) Generate clocks for CDS, USB with standard clock input
- 2) No external elements required
- 3) Standard clocks apply to two kinds of NTSC/PAL
- 4) Power down control in each 2-channel PLL
- 5) Single power supply of 3.3V operating
- 6) SSOP-B16 small package

●External dimensions (Unit : mm)

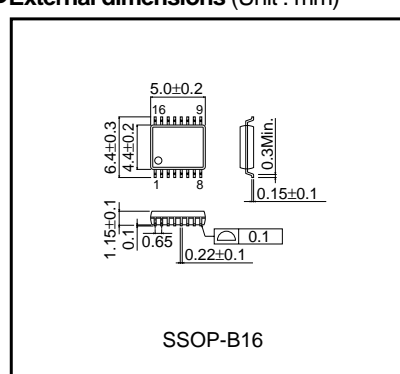

●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Applied voltage	V _{DD}	-0.5 to +7.0	V
Input voltage	V _{IN}	-0.5 to V _{DD} +0.5	V
Storage temperature range	T _{stg}	-30 to +125	°C
Power dissipation	P _d	450	mW

*IC destruction is not occurred, however, operation can not be guaranteed.

*Derating : 4.5mW/°C for operation above Ta=25°C.

*This product is not designed for protection against radioactive rays.


*Power dissipation is the rate when the IC is mounted on the board.

●Recommended operating conditions (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Power supply voltage	V _{DD}	3.0	-	3.6	V
Input "H" voltage range	V _{IH}	0.8V _{DD}	-	V _{DD}	V
Input "L" voltage range	V _{IL}	0	-	0.2V _{DD}	V
Operating temperature	T _{opr}	-5	-	+70	°C
Output load	CL	-	-	15	pF

Multimedia ICs

●Block diagram

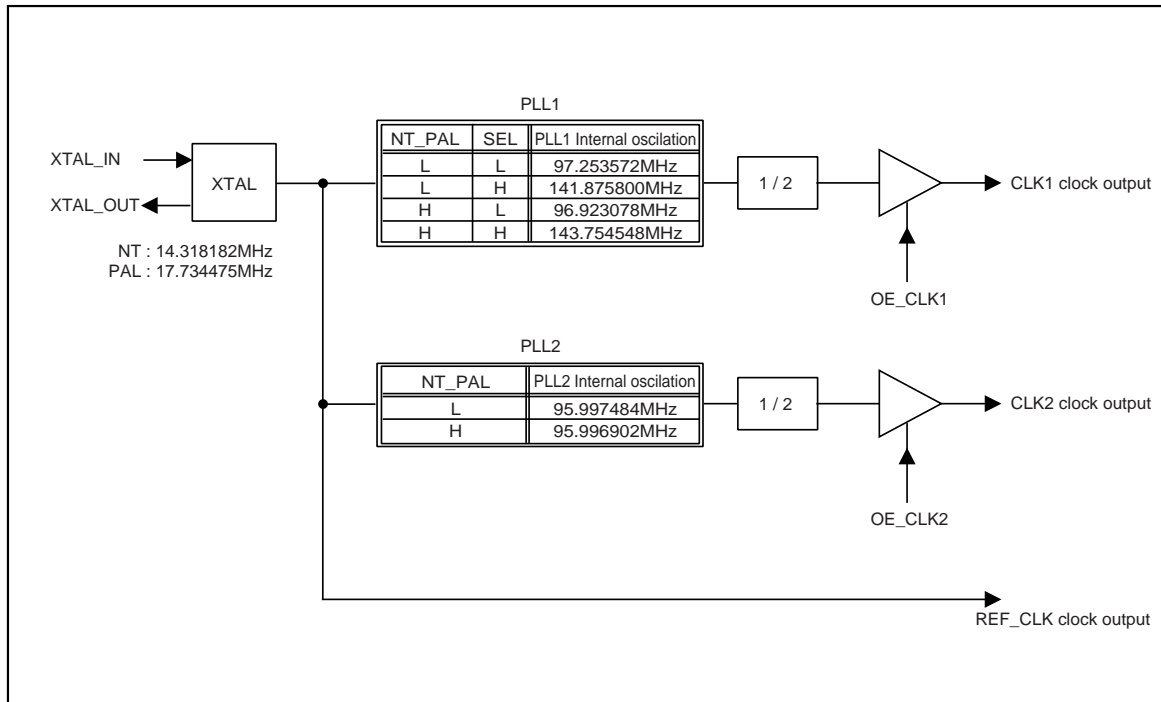


NT_PAL	SEL	REF-CLK (MHz)	CLK1 (MHz)	CLK2 (MHz)
L	L	17.734475	48.626786 $XTAL * (170 / 31) / 2$	47.998742 $XTAL * (249 / 46) / 2$
L	H	17.734475	70.937900 $XTAL * (360 / 45) / 2$	47.998742 $XTAL * (249 / 46) / 2$
H	L	14.318182	48.461539 $XTAL * (176 / 26) / 2$	47.998451 $XTAL * (295 / 44) / 2$
H	H	14.318182	71.877274 $XTAL * (502 / 50) / 2$	47.998451 $XTAL * (295 / 44) / 2$

Multimedia ICs




●Pin descriptions

Pin No.	Pin name	Functions
1	VDD2	VDD for clock output
2	VSS2	GND for clock output
3	REF_CLK	Crystal output
4	TEST1	Test mode control pin
5	AVDD	Analog VDD
6	AVSS	Analog GND
7	XTALIN	Standard crystal input
8	XTALOUT	Standard crystal output
9	OE_CLK2	Output enable pin for CLK2 (H : enable, L : output L fixed)
10	CLK2	CLK2 clock output
11	DVSS	Digital GND
12	DVDD	Digital VDD
13	NT_PAL	NT / PAL select (L : PAL, H : NTSC)
14	SEL	Output select
15	CLK1	CLK1 clock output
16	OE_CLK1	Output enable pin for CLK1 (H : enable, L : output L fixed)

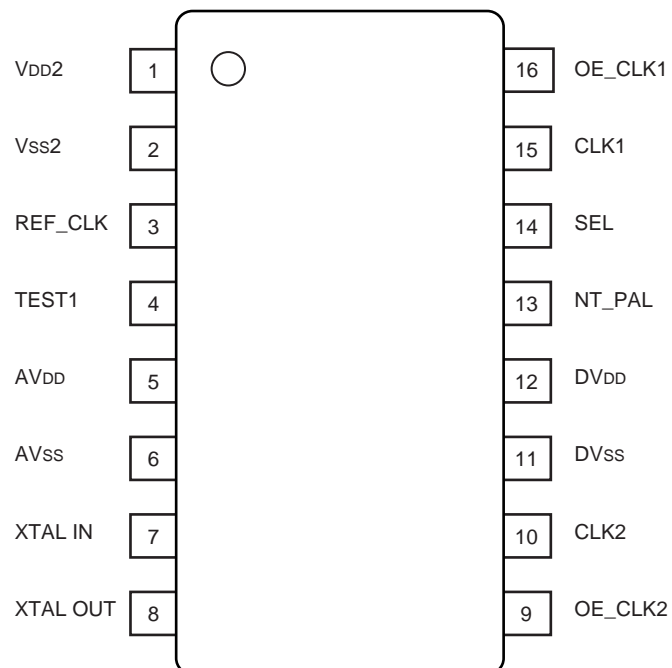

Multimedia ICs

●Input output circuits

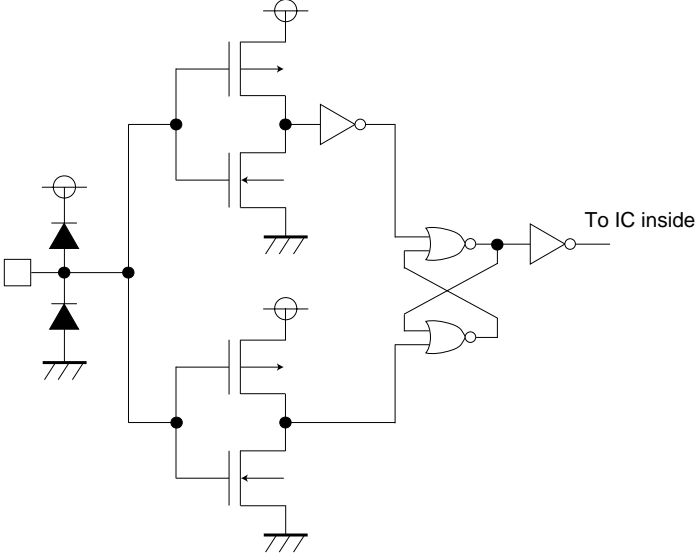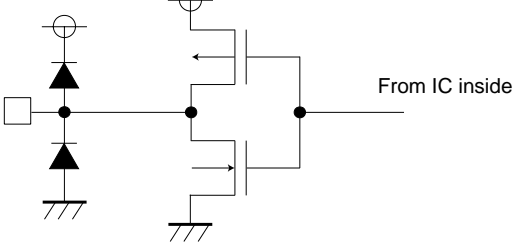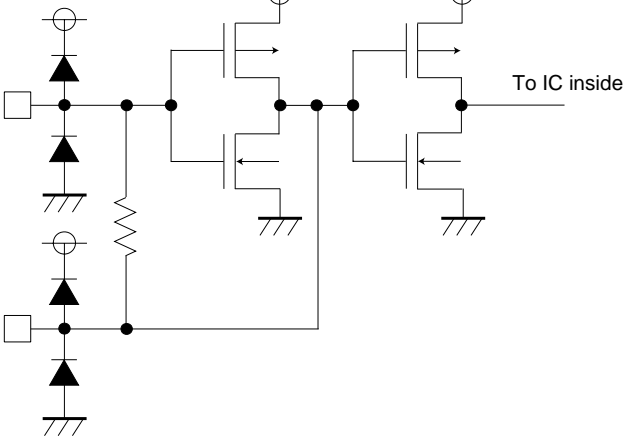Pin No.	Equivalent circuit
Input PIN (Schmidt trigger) 9, 13, 14, 16 (With pull_up) 4 (With pull_down)	
Output PIN 3, 10, 15	
Crystal PIN 7, 8	

Multimedia ICs

●Electrical characteristics (Unless specified otherwise Ta=25°C, VCC=3.3V, crystal frequency=14.318182MHz)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Output H voltage	VOH	2.4	–	–	V	IOH=4.0mA
Output L voltage	VOL	–	–	0.4	V	IOL=4.0mA
Input VthL *3	VthL	0.2V _{DD}	–	–	V	*1
Input VthH *3	VthH	–	–	0.8V _{DD}	V	*1
Hysteresis width *3	Vhys	–	0.4	–	V	Vhys=VthH-VthL
Operating circuit current	IDD	–	30	45	mA	No load
CLK1	CLK1_LL CLK1_LH CLK1_HL CLK1_HH	–	48.626786 70.937900 48.461539 71.877274	–	MHz	XTAL *170/31/2 (XTAL=17.734475MHz) XTAL *360/45/2 (XTAL=17.734475MHz) XTAL *176/26/2 (XTAL=14.318182MHz) XTAL *502/50/2 (XTAL=14.318182MHz)
CLK2	CLK2_L CLK2_H	–	47.998742 47.998451	–	MHz	XTAL *249/46/2 (XTAL=17.734475MHz) XTAL *295/44/2 (XTAL=14.318182MHz)
Duty	Duty	45	50	55	%	1/2 V _{DD} test
Jitter 1σ	JsSD	–	30	–	psec	1σ short time jitter
Jitter MIN-MAX	JsABS	–	180	–	psec	MIN.-MAX.
Rise time	tr	–	2.5	–	nsec	20% to 80% time of V _{DD}
Fall time	tf	–	2.5	–	nsec	20% to 80% time of V _{DD}
Output Lock time	tlock	–	–	1	msec	*2

Note) Output frequency is determined by the operation expression (Frequency divide) input to XTAL IN.


Output at 27MHz input is shown above.

Jitter is value when using Time interval analyzer with 10000 sampling.

*1) Low and high limit voltage in the schmitt trigger input Pin having hysteresis features shown in *3 diagram.


*2) Time that output takes to stabilize in the specific frequency range after the power supply reaches to 3.0V.

*3) Make reference to the diagram.

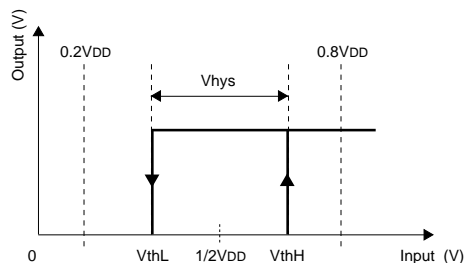

Multimedia ICs

●Application example

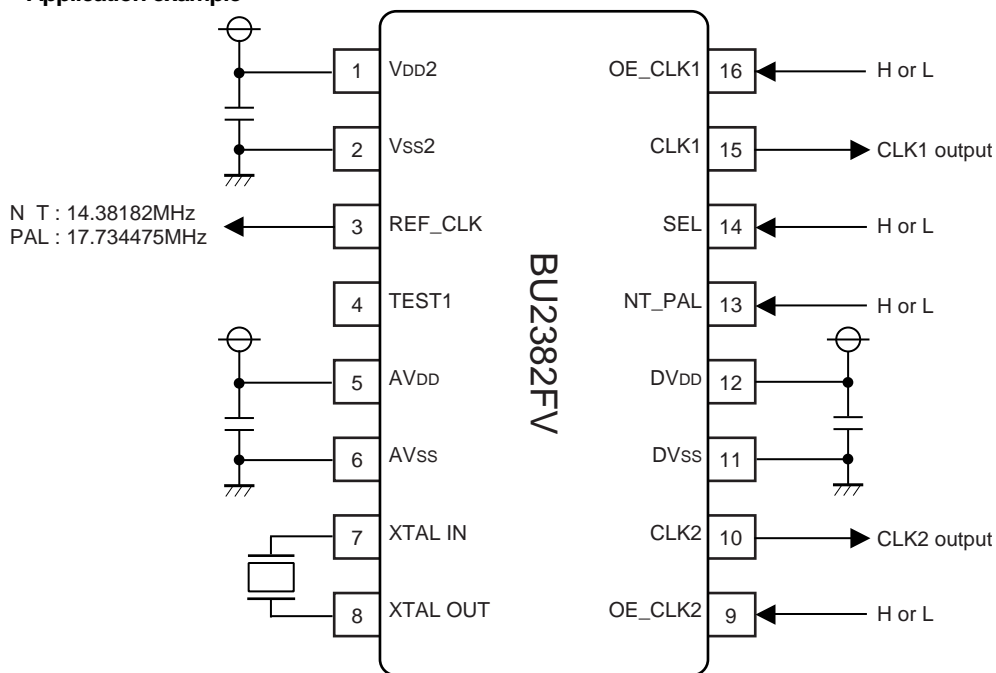

Note) The BU2382FV is basically placed on the board.

Decoupling capacitance (0.1 μ F) need to be placed between Pin1 (VDD2) and Pin2 (VSS2), Pin5 (AVDD) and Pin6 (AVSS), Pin11 (DVSS) and Pin12 (DVDD).

To obtain accurate frequency, capacitance (pF) need to be placed between Pin8 (XTAL IN) and Pin6 (AVSS). Pin7 (XTAL OUT) and Pin6 (AVSS).

Tantalum capacitance (10 to 100 μ F), ferrite beads may need to be placed to prevent power supply drop in certain board's case.

To reduce high frequency noise, selected bypass capacitors (<1 Ω at problem high frequency) maybe used for power pin as close to BU2382FV as possible.

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document use silicon as a basic material.
Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.