

GP1S23

Subminiature Photointerrupter

■ Features


1. Ultra-compact
2. PWB mounting type package
3. High sensing accuracy (Slit width: 0.3mm)
4. Gap between light emitter and drector: 2mm

■ Applications

1. Cameras
2. Floppy disk drives

■ Outline Dimensions

(Unit : mm)

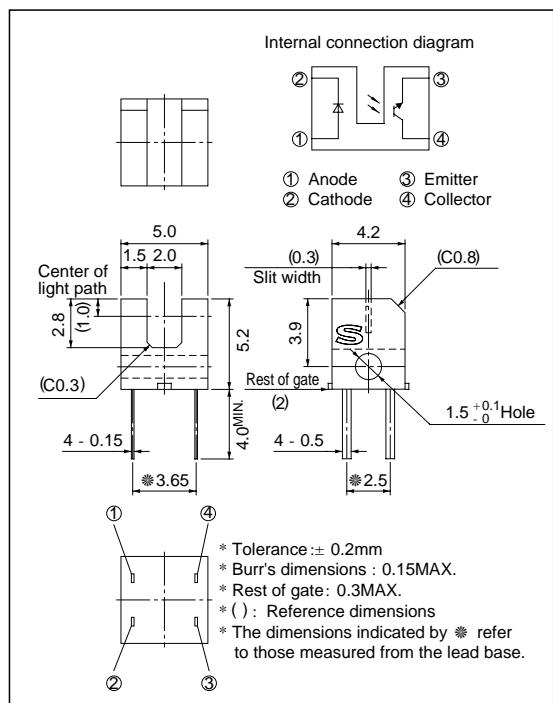


■ Absolute Maximum Ratings

(Ta = 25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I _F	50	mA
	Reverse voltage	V _R	6	V
	Power dissipation	P	75	mW
Output	Collector-emitter voltage	V _{CEO}	35	V
	Emitter-collector voltage	V _{ECO}	6	V
	Collector current	I _C	20	mA
	Collector power dissipation	P _C	75	mW
Total power dissipation		P _{tot}	100	mW
Operating temperature		T _{opr}	- 25 to + 85	°C
Storage temperature		T _{stg}	- 40 to + 100	°C
* ¹ Soldering temperature		T _{sol}	260	°C

*1 For 3 seconds



■ Electro-optical Characteristics

(Ta = 25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V _F	I _F = 20mA	-	1.2	1.4	V
	Reverse current	I _R	V _R = 3V	-	-	10	μA
Output	Collector dark current	I _{CEO}	V _{CE} = 20V	-	-	1 x 10 ⁻⁷	A
Transfer-characteristics	Collector Current	I _C	I _F = 5mA, V _{CE} = 5V	40	-	400	μA
	Collector-emitter saturation voltage	V _{CE(sat)}	I _F = 10mA, I _C = 40 μA	-	-	0.4	V
	Response time	t _r	I _C = 0.1mA, V _{CE} = 5V, R _L = 1kΩ	-	50	150	μs
	Rise time			-	50	150	μs
	Fall time	t _f					

Fig. 1 Forward Current vs. Ambient Temperature

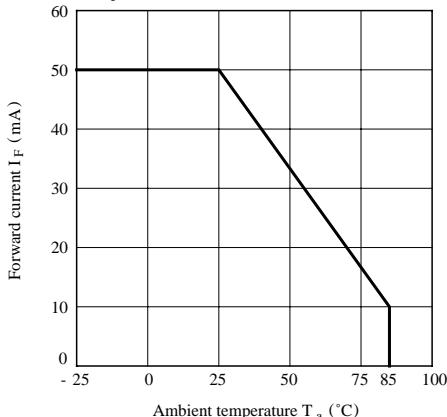


Fig. 2 Power Dissipation vs. Ambient Temperature

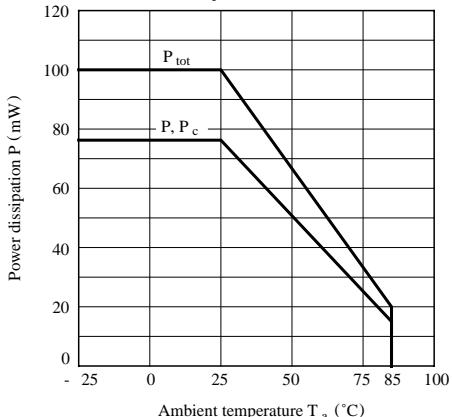


Fig. 3 Forward Current vs. Forward Voltage



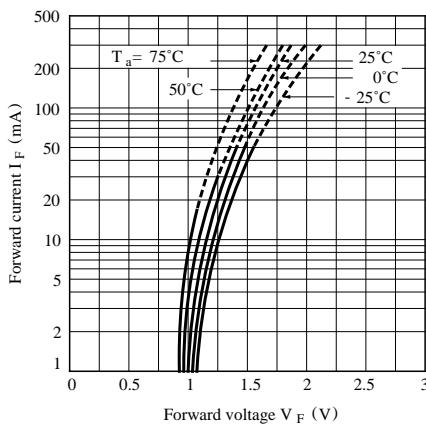



Fig. 4 Collector Current vs. Forward Current

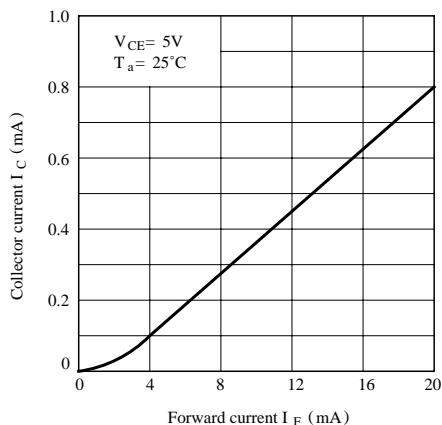


**Fig. 5 Collector Current vs.
Collector-emitter voltage**

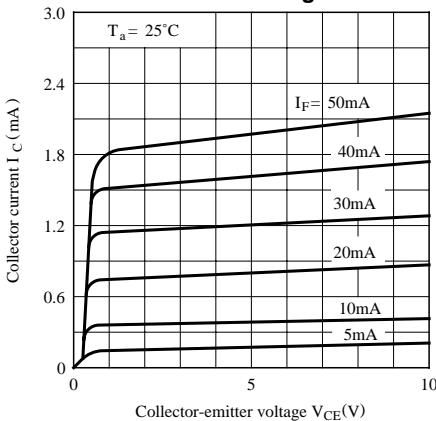

**Fig. 6 Collector Current vs.
Ambient Temperature**

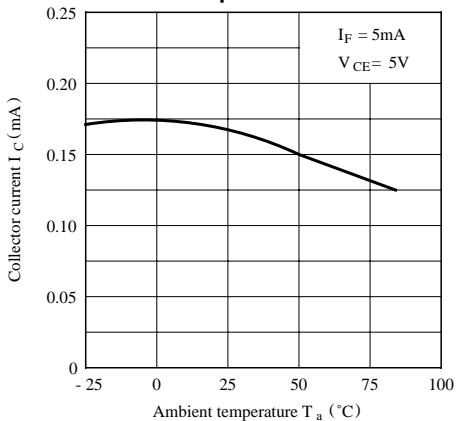

**Fig. 7 Collector-emitter Saturation Voltage vs.
Ambient Temperature**

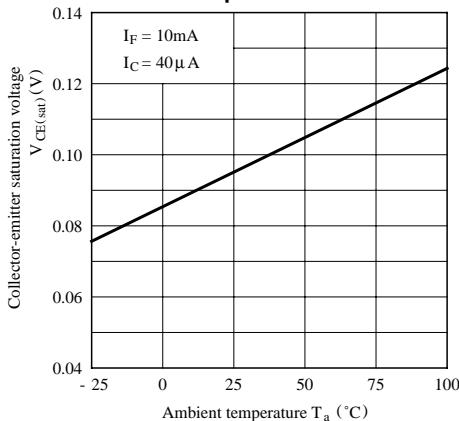

**Fig. 8 Collector Dark Current vs.
Ambient Temperature**



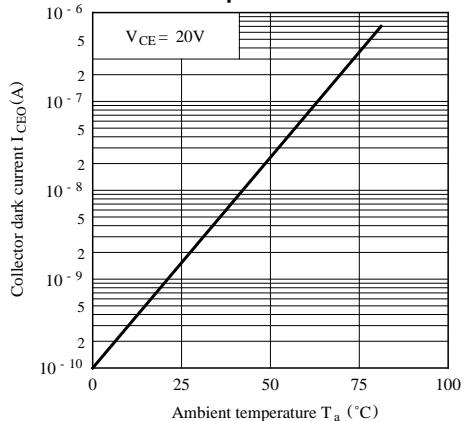



Fig. 9 Response Time vs. Load Resistance

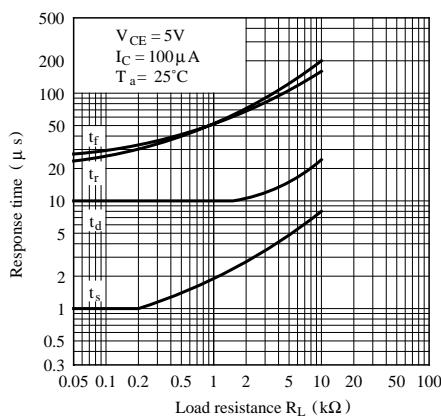


Test Circuit for Response Time

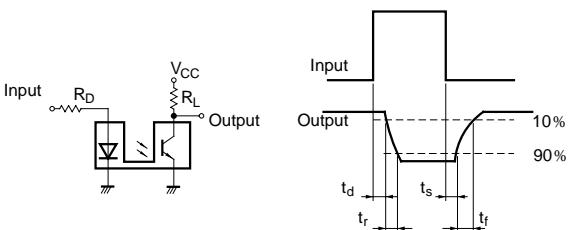

**Fig.10 Relative Collector Current vs.
Shield Distance (1)**

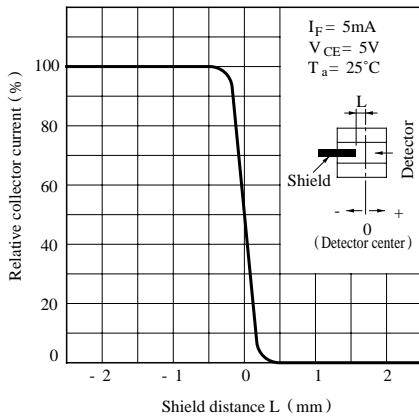

**Fig.11 Relative Collector Current vs.
Shield Distance (2)**

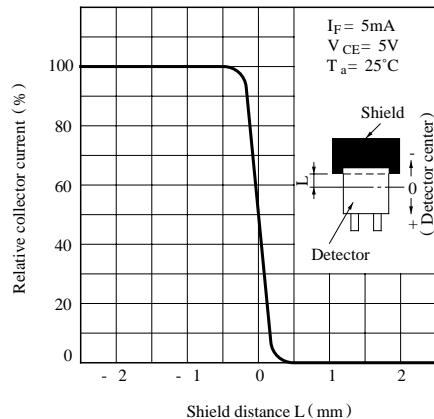

- Please refer to the chapter “Precautions for Use”.