

High performance video signal switcher

# Five inputs Dual Circuits Video Signal Switchers

## BA7626F/FS

### •Description

The BA7626F/FS is a 5-input video signal switching circuit with a broadband 6 dB amplifier that was developed for AV amplifier input switching. Just by devising a transistor buffer in the output, player switching of two VCR or other videotape players and three DVD players or other playback devices is possible. Moreover, input switching and switching of recording to a VCR or other device also can be performed independently.

Since the input circuit of the BA7626F/FS is terminated by 20k $\Omega$  impedance, it is suited to not only video signal but also chroma signal or audio signal switching.

### •Features

- 1) 5 input line, 3 output line switching
- 2) Built-in 6 dB amplifier
- 3) 5V operating voltage
- 4) 20k $\Omega$  input impedance

### •Use

AV amplifiers, Video selectors, etc.

### •Lineup

Part No.	BA7626F	BA7626FS
Package	SOP16	SSOP-A16
Input type	Bias (R=20k $\Omega$ )	

### •Absolute Maximum Ratings(Ta=25°C)

Parameter	Symbol	Limits	Unit
Supply voltage	Vcc	9	V
Power dissipation	BA7626F	300 ※1	mW
	BA7626FS	600 ※2	
Operating temperature	Topr	-25~+70	°C
Storage temperature	Tstg	-55~+125	°C

※1 Deratings is done at 3.0mW/°C above Ta=25°C. (BA7626F)

※2 Deratings is done at 6.0mW/°C above Ta=25°C. (BA7626FS)

### •Operating Range(Ta=25°C)

Parameter	Symbol	Min	Typ	Max	Unit
Power supply voltage	Vcc	4.5	5.0	5.5	V

Aug.2008

●Electrical characteristics (Unless otherwise noted Ta=25°C, Vcc=5.0V)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Conditions
Circuit current		ICC	—	15.0	20.0	mA	—
Maximum output level	BA7626F/FS	Vom	2.3	2.5	—	Vp-p	f=1kHz, THD=0.5%
Voltage gain		G <sub>V</sub>	5.7	6.2	6.7	dB	f=1MHz, V <sub>IN</sub> =1Vp-p
Interchannel crosstalk		G <sub>T</sub>	—	-65	-45	dB	f=4.43MHz, V <sub>IN</sub> =1Vp-p
Mute level		CTM	—	-35	-25	dB	f=4.43MHz, V <sub>IN</sub> =1Vp-p
Frequency characteristic		G <sub>f</sub>	-3	0	+3	dB	10MHz/1MHz, V <sub>IN</sub> =1Vp-p
Input impedance		Z <sub>IN</sub>	16	20	24	kΩ	
CTL pin switching level		V <sub>TH</sub>	2.2	—	3.3	V	—

※ This product is not designed for protection against radioactive rays.

●Truth table

Input			Output	Input			Output	Input			Output
A	B	E	MONOUT	C	D	E	VOUT1	C	D	E	VOUT2
L	L	※	IN1	L	L	※	—	L	L	※	IN1
H	L	※	IN2	H	L	※	IN2	H	L	※	—
L	H	※	IN3	L	H	※	IN3	L	H	※	IN3
H	H	L	IN4	H	H	L	IN4	H	H	L	IN4
H	H	H	IN5	H	H	H	IN5	H	H	H	IN5

※ Indicates "don't care"(H or L)

●Block diagram

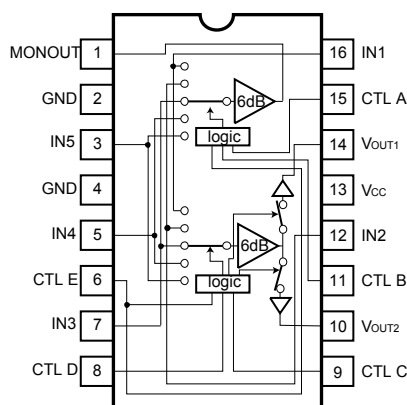


Fig.1

●Application circuit

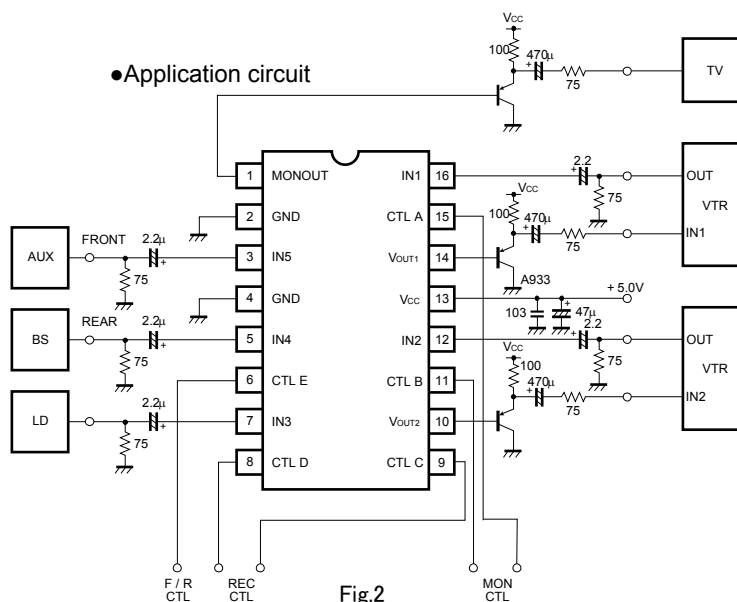


Fig.2


●Cautions on use

- 1) Numbers and data in entries are representative design values and are not guaranteed values of the items.
- 2) Although we are confident in recommending the sample application circuits, carefully check their characteristics further when using them. When modifying externally attached component constants before use, determine them so that they have sufficient margins by taking into account variations in externally attached components and the Rohm LSI, not only for static characteristics but also including transient characteristics.
- 3) Absolute maximum ratings  
If applied voltage, operating temperature range, or other absolute maximum ratings are exceeded, the LSI may be damaged. Do not apply voltages or temperatures that exceed the absolute maximum ratings. If you think of a case in which absolute maximum ratings are exceeded, enforce fuses or other physical safety measures and investigate how not to apply the conditions under which absolute maximum ratings are exceeded to the LSI.
- 4) GND potential  
Make the GND pin voltage such that it is the lowest voltage even when operating below it. Actually confirm that the voltage of each pin does not become a lower voltage than the GND pin, including transient phenomena.
- 5) Thermal design  
Perform thermal design in which there are adequate margins by taking into account the allowable power dissipation in actual states of use.
- 6) Shorts between pins and misinstallation  
When mounting the LSI on a board, pay adequate attention to orientation and placement discrepancies of the LSI. If it is misinstalled and the power is turned on, the LSI may be damaged. It also may be damaged if it is shorted by a foreign substance coming between pins of the LSI or between a pin and a power supply or a pin and a GND.
- 7) Operation in strong magnetic fields  
Adequately evaluate use in a strong magnetic field, since there is a possibility of malfunction.

●Pin descriptions (Ta=25°C, VCC=5V)

Pin No.	Pin name	Equivalent circuit
		BA7626F/FS
3 5 7 12 16	IN5 IN4 IN3 IN2 IN1	
6 8 9 11 15	CTLE CTLD CTLC CTLB CTLA	
1	MONOUT	
10 14	VOUT2 VOUT1	

●Selection of order type




Part. No.  
BA7626F  
BA7626FS

Tape and Reel information  
BA7626F...E2(Embossed carrier tape)  
BA7626FS...E2(Embossed carrier tape)

## SOP16


### <Dimension>



(Unit:mm)

### <Tape and Reel information>


Tape	Embossed carrier tape
Quantity	2500pcs
Direction of feed	E2 (The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand)

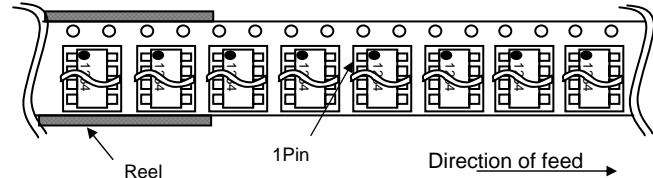

※When you order , please order in times the amount of package quantity.

## SSOP-A16


### <Dimension>



(Unit:mm)

### <Tape and Reel information>

Tape	Embossed carrier tape
Quantity	2500pcs
Direction of feed	E2 (The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand)

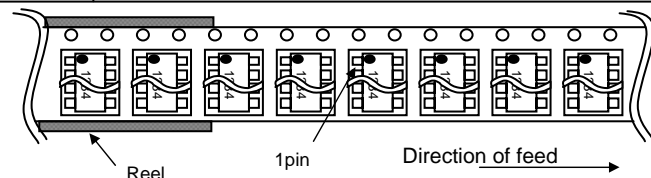

※When you order , please order in times the amount of package quantity.

- The contents described herein are correct as of August, 2008
- The contents described herein are subject to change without notice. For updates of the latest information, please contact and confirm with ROHM CO.,LTD.
- Any part of this application note must not be duplicated or copied without our permission.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams and information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by ROHM CO., LTD., is granted to any such buyer.
- The products described herein utilize silicon as the main material.
- The products described herein are not designed to be X ray proof.

The products listed in this catalog are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys). Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Contact us for further information about the products.

**San Diego**  
**Atlanta**  
**Boston**  
**Chicago**  
**Dallas**  
**Denver**  
**Detroit**  
**Nashville**  
**Mexico**  
**Düsseldorf**  
**Munich**  
**Stuttgart**  
**France**  
**United Kingdom**  
**Denmark**  
**Espoo**  
**Salo**  
**Oulu**  
**Barcelona**  
**Hungary**  
**Poland**  
**Russia**  
**Seoul**  
**Masan**  
**Dalian**  
**Beijing**

TEL: +1-858-625-3630  
TEL: +1-770-754-5972  
TEL: +1-978-371-0382  
TEL: +1-847-368-1006  
TEL: +1-469-287-5366  
TEL: +1-303-708-0908  
TEL: +1-248-348-9920  
TEL: +1-615-620-6700  
TEL: +52-33-3123-2001  
TEL: +49-2154-9210  
TEL: +49-8999-216168  
TEL: +49-711-7272-370  
TEL: +33-1-5697-3060  
TEL: +44-1-908-306700  
TEL: +45-3694-4739  
TEL: +358-9725-54491  
TEL: +358-2-7332234  
TEL: +358-8-5372930  
TEL: +34-9375-24320  
TEL: +36-1-4719338  
TEL: +48-22-5757213  
TEL: +7-495-739-41-74  
TEL: +82-2-8182-700  
TEL: +82-55-240-6234  
TEL: +86-411-8230-8549  
TEL: +86-10-8525-2483

FAX: +1-858-625-3670  
FAX: +1-770-754-0691  
FAX: +1-928-438-7164  
FAX: +1-847-368-1008  
FAX: +1-469-362-7973  
FAX: +1-303-708-0858  
FAX: +1-248-348-9942  
FAX: +1-615-620-6702  
FAX: +52-33-3123-2002  
FAX: +49-2154-921400  
FAX: +49-8999-216176  
FAX: +49-711-7272-3720  
FAX: +33-1-5697-3080  
FAX: +44-1-908-235788  
FAX: +45-3694-4789  
FAX: +358-9-7255-4499  
FAX: +358-2-7332237  
FAX: +358-8-5372931  
FAX: +34-9375-24410  
FAX: +36-1-4719339  
FAX: +48-22-5757001  
FAX: +7-495-739-41-74  
FAX: +82-2-8182-715  
FAX: +82-55-240-6236  
FAX: +86-411-8230-8537  
FAX: +86-10-8525-2489

**Tianjin**  
**Shanghai**  
**Hangzhou**  
**Nanjing**  
**Ningbo**  
**Qingdao**  
**Suzhou**  
**Wuxi**  
**Shenzhen**  
**Dongguan**  
**Fuzhou**  
**Guangzhou**  
**Huizhou**  
**Xiamen**  
**Zhuhai**  
**Hong Kong**  
**Taipei**  
**Kaohsiung**  
**Singapore**  
**Philippines**  
**Thailand**  
**Kuala Lumpur**  
**Penang**  
**Kyoto**  
**Yokohama**

TEL: +86-22-23029181  
TEL: +86-21-6279-2727  
TEL: +86-571-87658072  
TEL: +86-25-8689-0015  
TEL: +86-574-87654201  
TEL: +86-532-5779-312  
TEL: +86-510-82702693  
TEL: +86-755-8307-1300  
TEL: +86-769-8393-3320  
TEL: +86-591-8801-8698  
TEL: +86-20-3878-8100  
TEL: +86-752-205-1054  
TEL: +86-592-238-5705  
TEL: +86-756-3232-480  
TEL: +852-2-740-6262  
TEL: +886-2-2500-6956  
TEL: +886-7-237-0881  
TEL: +65-6332-2322  
TEL: +63-2-807-6872  
TEL: +66-2-254-4890  
TEL: +60-3-7958-8355  
TEL: +60-4-2286453  
TEL: +81-75-365-1218  
TEL: +81-45-476-2290

FAX: +86-22-23029183  
FAX: +86-21-6247-2066  
FAX: +86-571-87658071  
FAX: +86-25-8689-0393  
FAX: +86-574-87654208  
FAX: +86-532-5779-653  
FAX: +86-510-82702992  
FAX: +86-755-8307-3003  
FAX: +86-769-8398-4140  
FAX: +86-591-8801-8690  
FAX: +86-20-3825-5965  
FAX: +86-752-205-1059  
FAX: +86-592-239-8380  
FAX: +86-756-3232-460  
FAX: +852-2-375-8971  
FAX: +886-2-2503-2869  
FAX: +886-7-238-7332  
FAX: +65-6332-5662  
FAX: +63-2-809-1422  
FAX: +66-2-256-6334  
FAX: +60-3-7958-8377  
FAX: +60-4-2286452  
FAX: +81-75-365-1228  
FAX: +81-45-476-2295

Excellence in Electronics

# ROHM

## ROHM CO., LTD.

21 Saiin Mizosaki-cho, Ukyo-ku, Kyoto  
615-8585, Japan  
TEL: +81-75-311-2121 FAX: +81-75-315-0172  
URL: <http://www.rohm.com>

Published by  
KTC LSI Development Headquarters  
LSI Business Promotion Group