

TOTAL POWER INT'L


TPG65 Open Frame P/S

KEY FEATURES

- *Universal input
- *Built-in EMI filter
- *Optional ±12VDC/±24VDC/±48VDC input

APPLICATIONS

- *Telecommunications
- *Computer peripherals/Lan & Hub
- *Test & industrial equipments
- *Medical instruments
- *Business machines

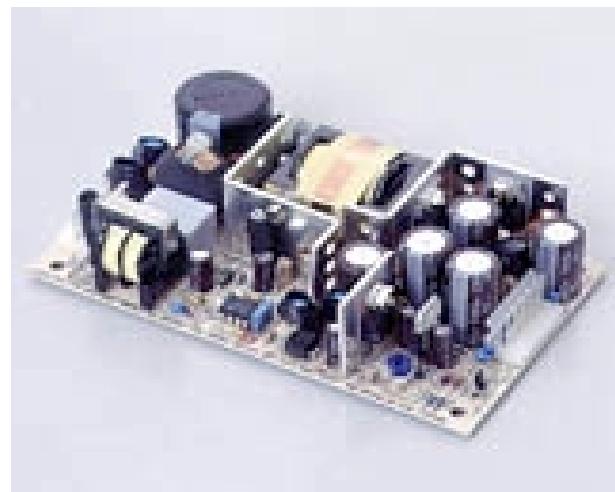


ELECTRICAL SPECIFICATIONS

INPUT

- *Input range-----90~264 VAC, universal
- *Frequency-----47~63Hz
- *Inrush current-----30A typical ,Cold start @25°C,115VAC
- *Efficiency-----65%~80% typical at full load
- *EMI filter-----FCC Class B conducted, CISPR 22 Class B conducted, EN55022 class B Conducted
- *Line regulation----- +/- 0.5% typical

OUTPUT

- *Maximum power---65W with 15 CFM forced air
(Refer next page)
- *Hold-up time -----10ms typical at full load and 115 VAC nominal line
- *Overload protection-Short circuit protection
- *Overvoltage protection -----Main output 20% to 40% above nominal output
- *Ripple/Noise ----- +/- 1% Max. @full load
(Optional +/-0.5% per inquiry)

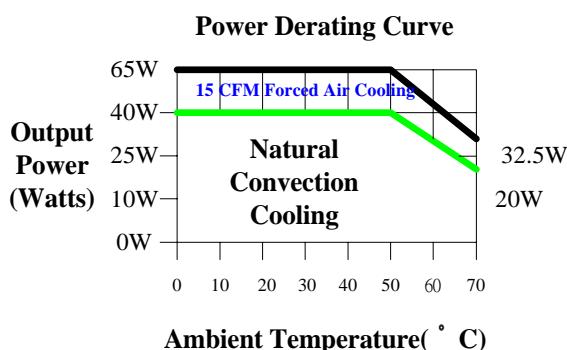

EMI & EMC

- *FCC part 15, Class B
- *CISPR 22 / EN55022, Class B
- *VCCI ,Class 2
- *CE, EN61000-3-2 (Class A) and -3 ; EN61000-4-2, -3 , -4 , -5 , -6 and -11

SAFETY APPROVAL

- *UL1950 / c UL
- *Optional CSA 22.2, LEVEL 3 (COMPLY WITH)
- *TUV EN60950
- *Optional UL 2601 (EMI Class A)(COMPLY WITH)

ENVIRONMENTAL

- *Operating temperature :
0 to 50°C ambient; derate each output at 2.5% per degree from 50°C to 70°C
- *Humidity:
Operating; non-condensing, 5% to 95%
- *Vibration :
10~55 Hz at 1G 3 minutes period, 30 minutes along X, Y and Z axis
- *Storage temperature:
-40 to 85°C
- *Temperature coefficient:
+/- 0.05% per degree C
- *MTBF demonstrated:
>100,000 hours at full load and 25°C ambient conditions

MODEL	OUTPUT VOLTAGE	ADJUSTMENT RANGE	MAXIMUM OUTPUT CURRENT	PEAK OUTPUT CURRENT(NOTE1)	MINIMUM OUTPUT CURRENT	TOTAL REGULATION(NOTE3)	RIPPLE & NOISE %P-P(NOTE2)	PEAK OUTPUT POWER(NOTE1)
SINGLE OUTPUT MODEL SELECTION CHART								
TPG65-15	+3.3V	±10% Typical	20A	23A	2A	±5%	±1.5%	75W Typical
TPG65-10	+5V	±10% Typical	13A	15A	0A	±3%	±1%	75W Typical
TPG65-11	+12V	±10% Typical	5.4A	6.2A	0A	±3%	±1%	75W Typical
TPG65-12	+15V	±10% Typical	4.3A	4.9A	0A	±3%	±1%	75W Typical
TPG65-13	+24V	±10% Typical	2.7A	3.1A	0A	±3%	±1%	75W Typical
TPG65-S5	+48V	±10% Typical	1.3A	1.5A	0A	±3%	±1%	75W Typical
TPG65-16	+10V	±10% Typical	6.5A	7.4A	0A	±3%	±1%	75W Typical
TPG65-18	+20V	±10% Typical	3.25A	3.7A	0A	±3%	±1%	75W Typical
TPG65-19	+36V	±10% Typical	1.8A	2A	0A	±3%	±1%	75W Typical

DUAL OUTPUT MODEL SELECTION CHART

TPG65-20	+3.3V	±10% Typical	9.7A	11.1A	0.97A	±5%	±1.5%	75W Typical
	+5V	Fixed	6.5A	7.4A	0.65A	±5%	±1%	
TPG65-21	+5V	±10% Typical	12A	13.8A	1.2A	±5%	±1%	75W Typical
	+12V	Fixed	1A	1.2A	0.1A	±5%	±1%	
TPG65-22	+5V	±10% Typical	6A	6.9A	0.6A	±5%	±1%	75W Typical
	+12V	Fixed	3A	3.5A	0.3A	±5%	±1%	
TPG65-23	+5V	±10% Typical	6A	6.9A	0.6A	±5%	±1%	75W Typical
	+24V	Fixed	1.5A	1.7A	0.15A	±5%	±1%	
TPG65-24	+12V	±10% Typical	3A	3.5A	0.3A	±5%	±1%	75W Typical
	-12V	Fixed	3A	3.5A	0.3A	±10%	±1%	
TPG65-25	+3.3V	±10% Typical	10A	11.5A	1A	±5%	±1.5%	75W Typical
	+12V	Fixed	1A	1.2A	0.1A	±5%	±1%	
TPG65-26	+3.3V	±10% Typical	15A	17.3A	1.5A	±5%	±1.5%	75W Typical
	-48V	Fixed	0.4A	0.5A	0.04A	±10%	±1%	
TPG65-27	+5V	±10% Typical	8A	9.2A	0.8A	±5%	±1%	75W Typical
	-5V	Fixed	2A	2.3A	0.2A	±10%	±1%	

TRIPLE OUTPUT MODEL SELECTION CHART


TPG65-31	+5V	±10% Typical	6A	6.9A	0.6A	±5%	±1%	75W Typical
	+12V	Fixed	2.2A	2.5A	0.22A	±5%	±1%	
	-12V	Fixed	0.35A	0.4A	0.04A	±10%	±1%	
TPG65-32	+5V	±10% Typical	6A	6.9A	0.6A	±5%	±1%	75W Typical
	+15V	Fixed	2.2A	2.5A	0.22A	±5%	±1%	
	-15V	Fixed	0.35A	0.4A	0.04A	±10%	±1%	
TPG65-T3Y	+5V	±10% Typical	5A	6.9A	0.5A	±5%	±1%	75W Typical
	-5V	Fixed	0.8A	1.4A	0.08A	±5%	±1%	
	+12V	Fixed	3.5A	1.4A	0.35A	±10%	±1%	
TPG65-31B	+5V	±10% Typical	6A	6.9A	0.6A	±5%	±1%	75W Typical
	+24V	Fixed	1A	2.3A	0.1A	±5%	±1%	
	-12V	Fixed	1A	1.2A	0.1A	±10%	±1%	
TPG65-36	+3.3V	±10% Typical	10A	11.5A	1A	±5%	±1.5%	75W Typical
	+5V	Fixed	2A	2.3A	0.2A	±5%	±1%	
	+12V	Fixed	1.25A	1.4A	0.13A	±10%	±1%	
TPG65-38	+5V	±10% Typical	1A	6.9A	0.1A	±5%	±1%	75W Typical
	+15V	Fixed	1.6A	2.5A	0.16A	±5%	±1%	
	+48V	Fixed	0.75A	1.4A	0.08A	±10%	±1%	
TPG65-39	+3.3V	±10% Typical	13.5A	15.5A	1.35A	±5%	±1.5%	75W Typical
	+12V	Fixed	1.5A	1.7A	0.15A	±5%	±1%	
	+5V	Fixed	1A	1.2A	0.1A	±10%	±1%	

MODEL	OUTPUT VOLTAGE	ADJUSTMENT RANGE	MAXIMUM OUTPUT CURRENT	PEAK OUTPUT CURRENT(NOTE1)	MINIMUM OUTPUT CURRENT	TOTAL REGULATION(NOTE3)	RIPPLE & NOISE %P-P(NOTE2)	PEAK OUTPUT POWER(NOTE1)
-------	----------------	------------------	------------------------	----------------------------	------------------------	-------------------------	----------------------------	--------------------------

- NOTES:**
- 1) Peak loads for lasting <30 seconds with a maximum 10% duty cycle are acceptable. Please contact us if need special peak load.
 - 2) Maximum peak to peak noise expressed as a percentage of output voltage, 20MHz bandwidth, input not less nominal line, 0.1 μ F and 47 μ F Cap. on outputs.
 - 3) Loading test conditions are set for all outputs at minimum, middle and maximum of loads. Special cross loading requirement is welcomed.
 - 4) Detailed engineering specification of each model is available for inquiry.
 - 5) Special output voltage/current inquiry is welcomed.
 - 6) Specifications subject to change without notice.
 - 7) 25% derated if 24 VDC input version; 50% derated if 12 VDC input version.

J1=CONNECTOR,MOLEX#09-65-2068(OR EQUIVALENT)
 (MATING CONNECT.=MOLEX#09-50-3061)
 J2=CONNECTOR,MOLEX#09-65-2058(OR EQUIVALENT)
 (MATING CONNECT.=MOLEX#09-50-3051)
 ALL MATING TERMINAL=MOLEX#08-50-0106(OR EQUIVALENT)

$$\text{MAXIMUM COMPONENT HEIGHT} = \frac{25.4 +2.54}{1.00 +.10}$$

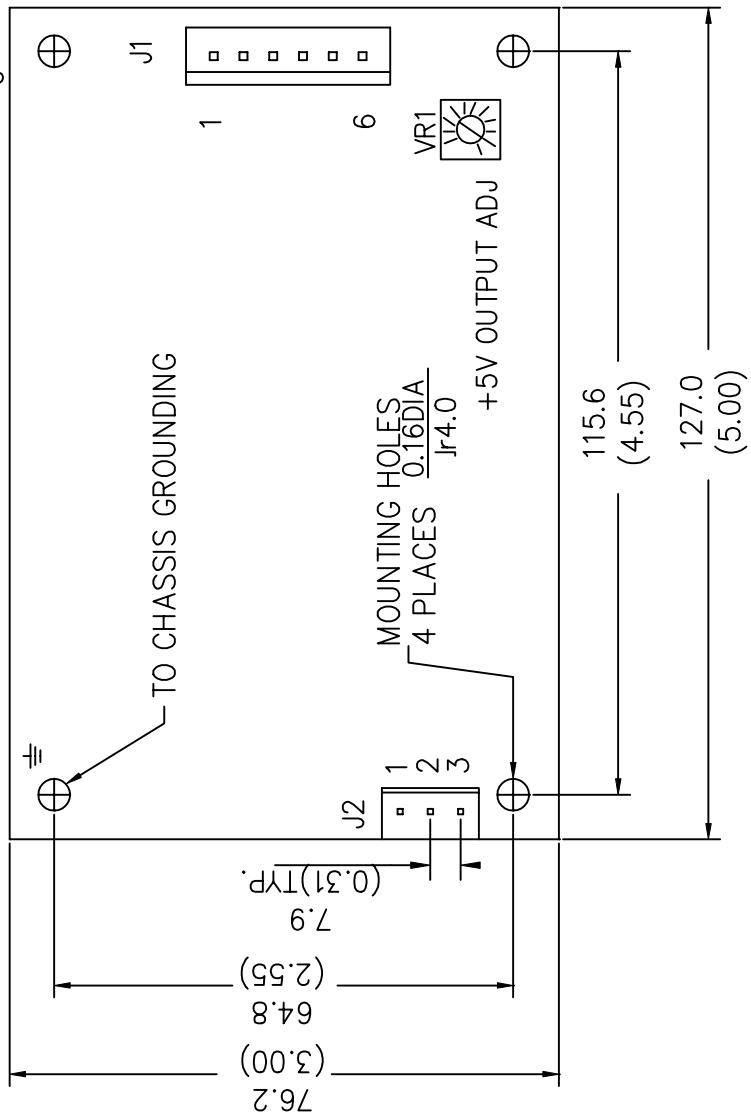

J1 (CONNECTORS) CONFIGURATION

Single Output	1	2	3	4	5	6
	V1			V1	RET	

J2 (CONNECTORS) CONFIGURATION

1	2	3
GRD	NEUT(-)	LINE(+)

J1 (CONNECTORS) CONFIGURATION

Multiple Output	1	2	3	4	5	6
	V2			V1	RET	V3