

PANEL DISPLAY UNITS


192 × 96 mm

φ 5 mm 32 × 16 Dots

LN5121291UNB

Global Prat No. LNP175012

■ Outline Drawing

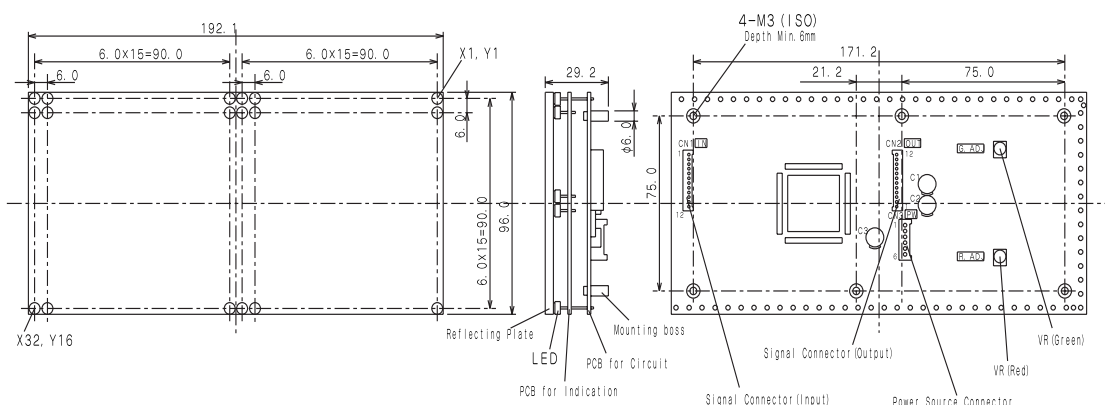

■ Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Ratings	Unit
Supply Voltage for Logic	V _{CC}	− 0.3 ~ + 6.0	V
Supply Voltage for LED	V _{LED}	Max 5.5	V
Input Voltage	V _{in}	− 0.3 ~ V _{CC} + 0.3	V
Operating Ambient Temperature	T _{opr}	− 10 ~ + 45	°C
Storage Temperature	T _{stg}	− 25 ~ + 85	°C

■ Main Specifications (Ta = 25°C)

Item		Symbol	Ratings	Unit
Display Colors			Red, Green, Amber	
Dot Diameter			φ 5.0	mm
Dots Pitch			6.0	mm
Dot Total Number			512 (32 × 16)	
Display Surface Size			192 × 96	mm
Brightness (when lighting all lamps)		B	R e d : 70 Green : 70 Controllable	cd/m ²
Operating Method			1/16(Duty) Dynamic lighting	
Clock Frequency		CLK	Max 20	MHz
for Logic	Supply Voltage	V _{CC}	5.0 ± 0.5	V
	Supply Current	I _{CC}	Max 30	mA
for LED	Supply Voltage	V _{LED}	5.0 ± 0.2	V
	Supply Current	I _{LED}	Max 5.2 when two colors are all turned "ON"	A
Weight			320	g