

**MOTOROLA**  
**SEMICONDUCTOR**  
**TECHNICAL DATA**
**LT1739**
**The RF Line**
**NPN Silicon**  
**High Frequency Transistor**

... specifically designed for CRT driver applications requiring high frequency and high voltage, such as high resolution color graphics video monitors.

- High Voltage —  $V_{(BR)CBO} = 100 \text{ V Min}$
- High Cutoff Frequency —  $f_T = 900 \text{ MHz Min}$
- Low Output Capacitance —  $C_{cb} = 2.5 \text{ pF Max @ } V_{CB} = 15 \text{ V}$
- Gold Metallization

$f_T = 900 \text{ MHz MIN}$   
**HIGH FREQUENCY**  
**TRANSISTOR**  
**NPN SILICON**



**TO-39**  
**CASE 79-04, STYLE 1**

**MAXIMUM RATINGS**

| Rating                         | Symbol    | Value       | Unit  |
|--------------------------------|-----------|-------------|-------|
| Collector-Base Voltage         | $V_{CBO}$ | 100         | Vdc   |
| Emitter-Base Voltage           | $V_{EBO}$ | 3           | Vdc   |
| Collector Current — Continuous | $I_C$     | 300         | mA dc |
| Operating Junction Temperature | $T_J$     | 200         | °C    |
| Storage Temperature Range      | $T_{stg}$ | -65 to +200 | °C    |

**ELECTRICAL CHARACTERISTICS**

| Characteristic                                                                     | Symbol        | Min | Typ | Max | Unit             |
|------------------------------------------------------------------------------------|---------------|-----|-----|-----|------------------|
| <b>OFF CHARACTERISTICS</b>                                                         |               |     |     |     |                  |
| Collector-Base Breakdown Voltage ( $I_C = 0.1 \text{ mA}, I_E = 0$ )               | $V_{(BR)CBO}$ | 100 | —   | —   | Vdc              |
| Emitter-Base Breakdown Voltage ( $I_E = 0.1 \text{ mA}, I_C = 0$ )                 | $V_{(BR)EBO}$ | 3   | —   | —   | Vdc              |
| Collector-Emitter Breakdown Voltage ( $I_C = 1 \text{ mA}, R_{BE} = 1 \text{ k}$ ) | $V_{(BR)CER}$ | 100 | —   | —   | Vdc              |
| Collector Cutoff Current ( $V_{CB} = 70 \text{ V}, I_E = 0$ )                      | $I_{CBO}$     | —   | —   | 20  | $\mu\text{A dc}$ |
| Collector Cutoff Current ( $V_{CE} = 70 \text{ V}, V_{BE} = 0$ )                   | $I_{CES}$     | —   | —   | 100 | $\mu\text{A dc}$ |

**ON CHARACTERISTICS**

|                                                                                    |               |    |   |     |    |
|------------------------------------------------------------------------------------|---------------|----|---|-----|----|
| DC Current Gain ( $I_C = 50 \text{ mA}, V_{CE} = 5 \text{ V}$ )                    | $h_{FE}$      | 20 | — | 60  | —  |
| Collector-Emitter Saturation Voltage ( $I_C = 50 \text{ mA}, I_B = 5 \text{ mA}$ ) | $V_{CE(sat)}$ | —  | — | 900 | mV |

**DYNAMIC CHARACTERISTICS**

|                                                                                    |          |   |   |     |    |
|------------------------------------------------------------------------------------|----------|---|---|-----|----|
| Collector-Base Capacitance ( $V_{CB} = 15 \text{ V}, I_E = 0, f = 1 \text{ MHz}$ ) | $C_{ob}$ | — | — | 2.5 | pF |
|------------------------------------------------------------------------------------|----------|---|---|-----|----|

**FUNCTIONAL TESTS**

|                                                                                        |              |     |   |   |     |
|----------------------------------------------------------------------------------------|--------------|-----|---|---|-----|
| Cutoff Frequency ( $V_{CE} = 15 \text{ V}, I_C = 50 \text{ mA}, f = 250 \text{ MHz}$ ) | $f_T$        | 900 | — | — | MHz |
| Insertion Gain ( $V_{CE} = 10 \text{ V}, I_C = 50 \text{ mA}, f = 200 \text{ MHz}$ )   | $ S_{21} ^2$ | 12  | — | — | dB  |

7-33-05

TYPICAL CHARACTERISTICS

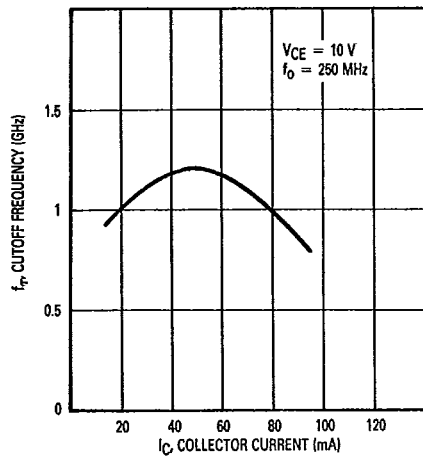


Figure 1. Gain Bandwidth Product versus Collector Current

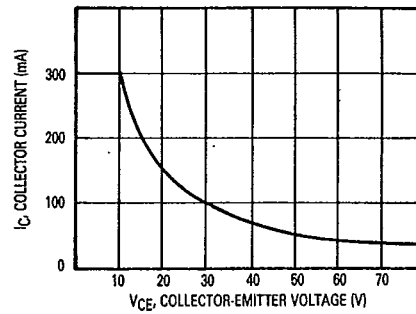


Figure 2. Safe Operating Area

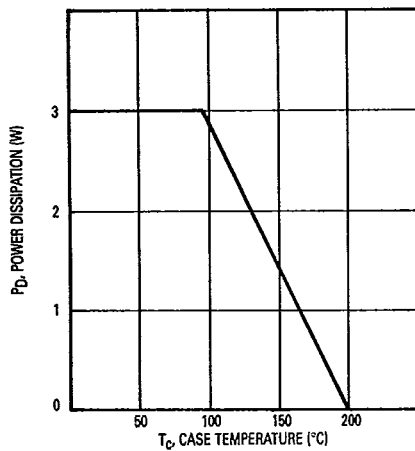


Figure 3. Power Dissipation versus Temperature

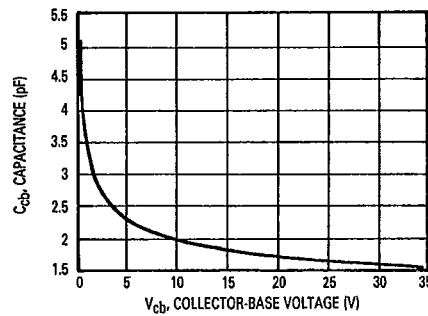


Figure 4. Junction Capacitance versus Voltage