

Description: piezo electric diaphragm

Date: 7/28/2006 Unit: mm Page No: 1 of 4




## **Specifications**

Maximum input voltage	30 Vp-p		
Resonant frequency	6.5 ± 0.5 KHz	6.5 ± 0.5 KHz see Measurement Methods	
Resonant impedance	350 Ω max.	see Measurement Methods	
Electrostatic capacitance	13,000 ±30% pF	at 120 Hz / 1 V	
Operating temperature	-20 ~ +70° C		
Storage temperature	-30 ~ +80° C		
Dimensions	Ø20.0 x H0.43 mm		
Weight	1.50 g max.		
Material	Brass		
Terminal	Wire type		
DC resistance	20 M Ω min.	Fluke 45 rate: Fast	
		Measurement time: 1 second	
		(only for $\leq$ 20 mm test)	
RoHS	yes		

# **Appearance Drawing**

Tolerance: ±0.5

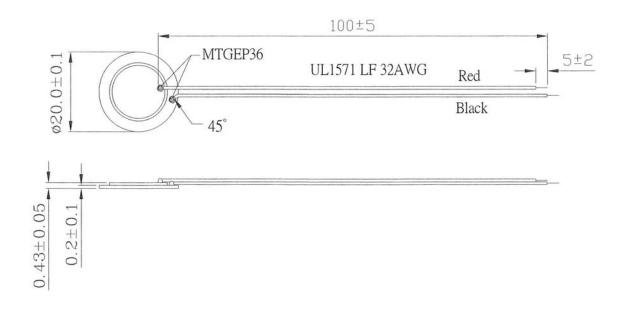



Date: 7/28/2006 Unit: mm Page No: 2 of 4


### Description: piezo electric diaphragm

# **Measuring Methods**

1) Resonant frequency / Resonant impedance

The piezo electric diaphragm should be clamped at a node point (as shown in the following figure) to be free from any mechanical stress. Measure its resonant frequency and resonant impedance by using a vector impedance analyzer or equivalent.

When the input frequency is swept within 2 KHz to 8 KHz, the resonant frequency is defined as the frequency where the impedance shows minimum value. This impedance should be the resonant impedance.



#### 2) Static capacitance

The electrostatic capacitance should be measured at 120 Hz by using an L.C.R. meter (ex. HP4194A(H.P.)) or equivalent. The part should be clamped in the same way as the measurement or resonant frequency / resonant impedance mentioned above.

# **Mechanical Characteristics**

ltem	Test Condition	Evaluation Standard
Solderability	Stripped wires of lead wires are immersed in	90% min. of the stripped wires
(Connector excepted)	rosin for 5 seconds and then immersed in	will be wet with solder. (Except
	solder bath of 270 ±5°C for 3 ±0.5 seconds.	the edge of the terminal)
Lead Wire Pull Strength	The horizontal force of 3.0N (0.306kg) should	No damage or cutting off.
	be applied to the double lead wire for 30 sec.	
Vibration	The diaphragm should be measured after	The value of the resonant
	applying a vibration amplitude of 1.5 mm with	frequency should be ±10% of the
	10 to 55 Hz band of vibration frequency to each	initial measurements.
	of the 3 perpendicular directions for 2 hours.	Electrostatic capacitance should
		be ±20% compared with the initial
		measurement. The SPL should
		be within ±10dB compared
		with the initial measurement.



Description: piezo electric diaphragm

Date: 7/28/2006 Unit: mm Page No: 3 of 4

# **Environment Test**

Item	Test Condition	Evaluation Standard	
High temp. test	After being placed in a chamber at +80°C for		
Low temp. test	240 hours. After being placed in a chamber at -30°C for	The diaphragm will be measured after being placed at +25°C for 4 hours. The value of the	
Humidity test	240 hours. After being placed in a chamber at +40°C and 90±5% relative humidity for 240 hours.		
Temp. cycle test	The part shall be subjected to 5 cycles. One cycle will consist of:		
	+80°C +25°C -30°C 0.5hr 0.25 0.5hr 0.5hr 0.5hr 0.25	resonant frequency should be $\pm 10\%$ , the value of the electro static capacitance should be $\pm 20\%$ compared to the initial measurements. The resonant impedance should be 2,000 $\Omega$ max.	
	3hours		

## **Test Conditions**

Standard Test Condition Judgement Test Condition a) Tempurature: +5 ~ +35°C a) Tempurature: +25 ±2°C b) Humidity: 45 - 85% b) Humidity: 60 - 70%

c) Pressure: 860-1060 mbar c) Pressure: 860-1060 mbar



Description: piezo electric diaphragm

Date: 7/28/2006 Unit: mm Page No: 4 of 4



