

STANDARD RECOVERY DIODES

Hockey Puk Version


Features

- Wide current range
- High voltage ratings up to 4500V
- High surge current capabilities
- Diffused junction
- Hockey Puk version
- Case style DO-200AC (K-PUK)

Typical Applications

- Converters
- Power supplies
- Machine tool controls
- High power drives
- Medium traction applications

2100A



case style DO-200AC (K-PUK)

Major Ratings and Characteristics

Parameters	SD1700C..K		Units
	24 to 36	40 to 45	
$I_{F(AV)}$	2080	1875	A
@ T_{hs}	55	55	°C
$I_{F(RMS)}$	3600	3280	A
@ T_{hs}	25	25	°C
I_{FSM} @ 50Hz	24000	20000	A
@ 60Hz	25150	20950	A
I^2t @ 50Hz	2890	2000	KA ² s
@ 60Hz	2630	1826	KA ² s
V_{RRM} range	2400 to 3600	4000 to 4500	V
T_J	- 40 to 150	- 40 to 150	°C

SD1700C..K Series

Bulletin I2087 rev. B 04/00

International
IOR Rectifier

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{RRM} : maximum repetitive peak reverse voltage V	V_{RSM} : maximum non-repetitive peak rev. voltage V	I_{RRM} max. @ $T_J = T_J$ max. mA
SD1700C..K	24	2400	2500	75
	30	3000	3100	
	36	3600	3700	
	40	4000	4100	
	45	4500	4600	

Forward Conduction

Parameter		SD1700C..K		Units	Conditions			
		24 to 36	40 to 45					
I _{F(AV)}	Max. average forward current @ Heatsink temperature	2080(1000)	1875(920)	A	180° conduction, half sine wave Double side (single side) cooled			
		55(85)	55(85)	°C				
I _{F(RMS)}	Max. RMS forward current	3600	3280	A	@ 25°C heatsink temperature double side cooled			
I _{FSM}	Max. peak, one-cycle forward, non-repetitive surge current	24000	20000	A	t = 10ms	No voltage	Sinusoidal halfwave, Initial T _J = T _J max.	
		25150	20950		t = 8.3ms	reapplied		
		20200	16800		t = 10ms	50% V _{RRM}		
		21150	17600		t = 8.3ms	reapplied		
I ² t	Maximum I ² t for fusing	2890	2000	KA ² s	t = 10ms	No voltage		Initial T _J = T _J max.
		2630	1826		t = 8.3ms	reapplied		
		2040	1415		t = 10ms	50% V _{RRM}		
		1860	1292		t = 8.3ms	reapplied		
I ² √t	Maximum I ² √t for fusing	28900	20000	KA ² /s	t = 0.1 to 10ms, no voltage reapplied			
V _{F(TO)1}	Low level value of threshold voltage	0.89	0.88	V	(16.7% × π × I _{F(AV)}) < I < π × I _{F(AV)} , T _J = T _J max.			
V _{F(TO)2}	High level value of threshold voltage	1.02	0.99		(I > π × I _{F(AV)}), T _J = T _J max.			
r _{f1}	Low level value of forward slope resistance	0.23	0.31	mΩ	(16.7% × π × I _{F(AV)}) < I < π × I _{F(AV)} , T _J = T _J max.			
r _{f2}	High level value of forward slope resistance	0.21	0.29		(I > π × I _{F(AV)}), T _J = T _J max.			
V _{FM}	Max. forward voltage drop	1.81	2.11	V	I _{pk} = 4000A, T _J = T _J max, t _p = 10ms sinusoidal wave			

Thermal and Mechanical Specifications

Parameter		SD1700C..K		Units	Conditions
		24 to 36	40 to 45		
T _J	Max. junction operating temperature range	-40 to 150	-40 to 150	°C	
T _{stg}	Max. storage temperature range	-55 to 200	-55 to 200		
R _{thJ-hs}	Max. thermal resistance, junction to heatsink	0.042 0.020		K/W	DC operation single side cooled DC operation double side cooled
F	Mounting force, ± 10%	22250 (2250)		N (Kg)	
wt	Approximate weight	425		g	
Case style		DO-200AC (K-PUK)			See Outline Table

ΔR_{thJ-hs} Conduction

(The following table shows the increment of thermal resistance R_{thJ-hs} when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction		Rectangular conduction		Units	Conditions
	Single Side	Double Side	Single Side	Double Side		
180°	0.002	0.002	0.001	0.001	K/W	T _J = T _J max.
120°	0.002	0.002	0.002	0.002		
90°	0.003	0.003	0.003	0.003		
60°	0.004	0.004	0.004	0.004		
30°	0.007	0.007	0.007	0.007		

Ordering Information Table

Device Code					
SD	170	0	C	45	K
①	②	③	④	⑤	⑥
1	- Diode				
2	- Essential part number				
3	- 0 = Standard recovery				
4	- C = Ceramic Puk				
5	- Voltage code: Code x 100 = V _{RRM} (See Voltage Ratings table)				
6	- K = Puk Case DO-200AC (K-PUK)				

SD1700C..K Series

Bulletin I2087 rev. B 04/00

International
IRF Rectifier

Outline Table

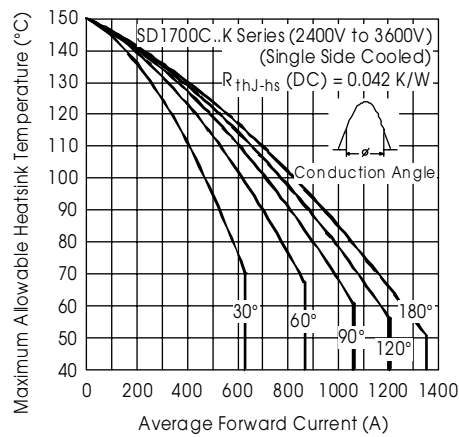
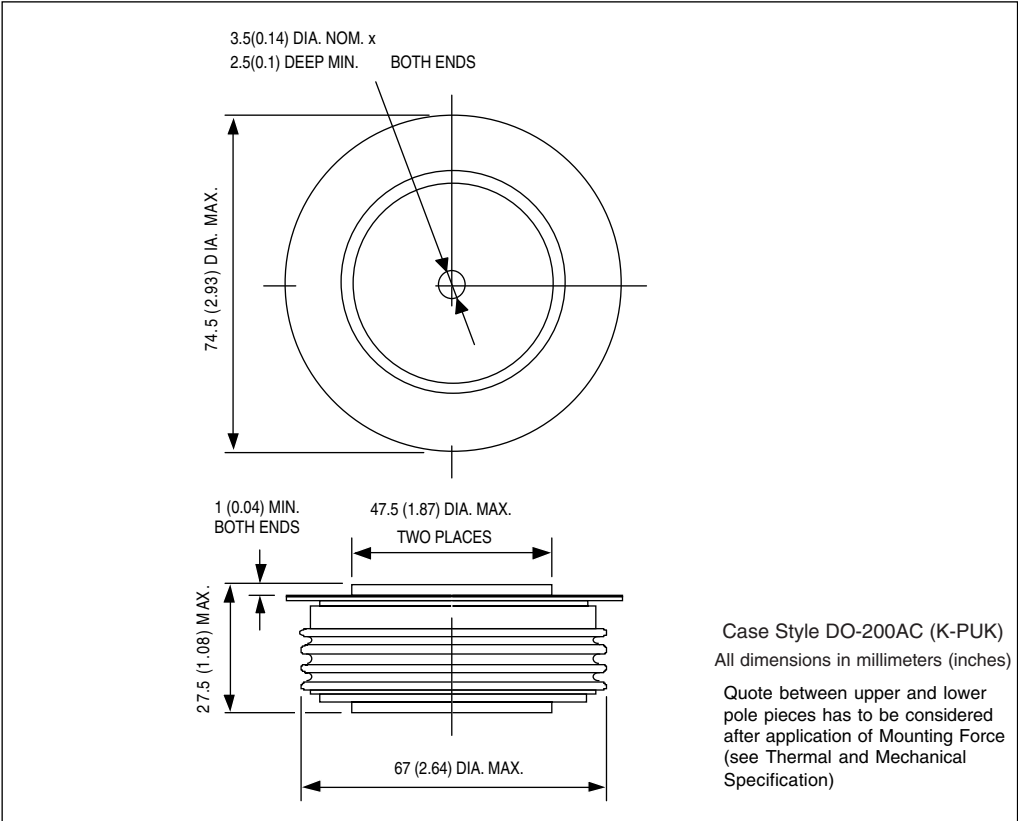


Fig. 1 - Current Ratings Characteristics

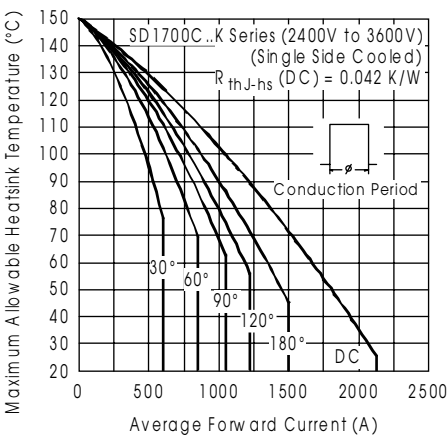


Fig. 2 - Current Ratings Characteristics

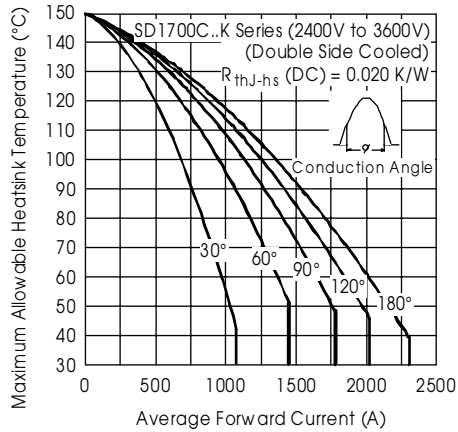


Fig. 3 - Current Ratings Characteristics

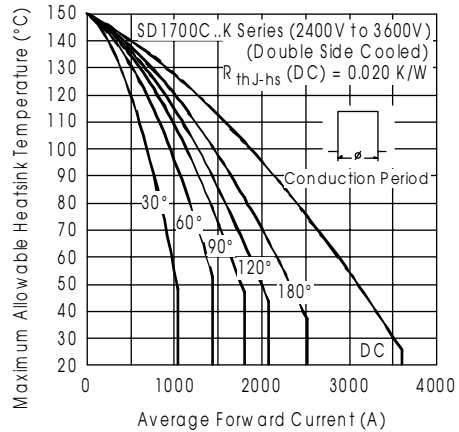


Fig. 4 - Current Ratings Characteristics

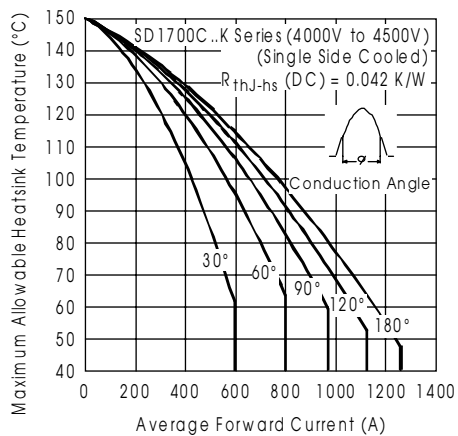


Fig. 5 - Current Ratings Characteristics

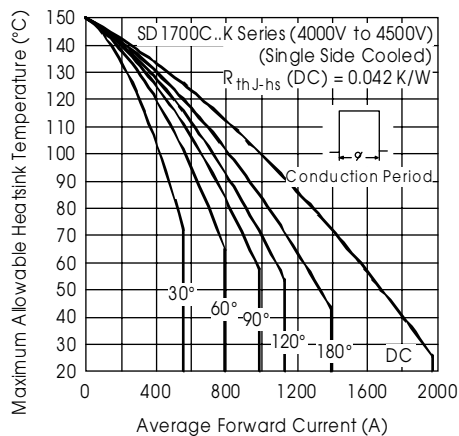


Fig. 6 - Current Ratings Characteristics

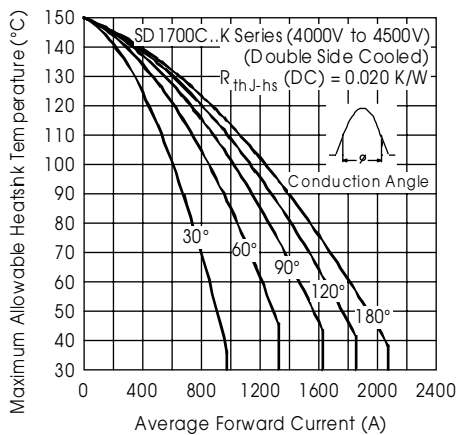


Fig. 7 - Current Ratings Characteristics

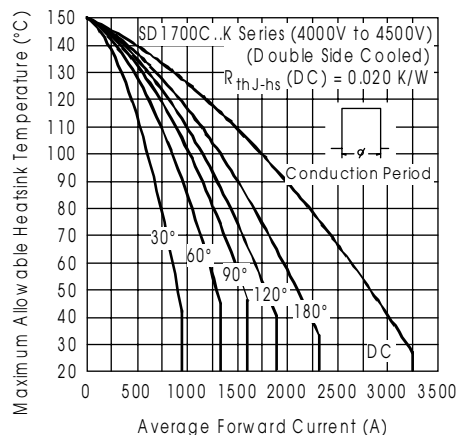


Fig. 8 - Current Ratings Characteristics

SD1700C..K Series

Bulletin I2087 rev. B 04/00

International
IR Rectifier

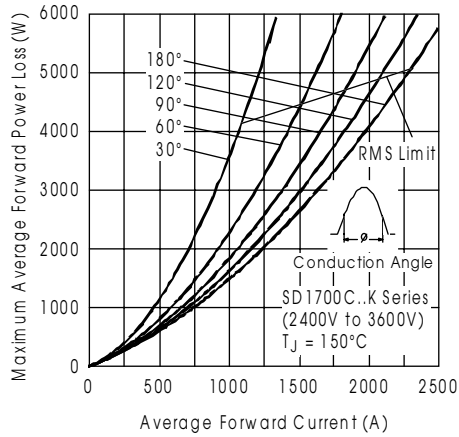


Fig. 9 - Forward Power Loss Characteristics

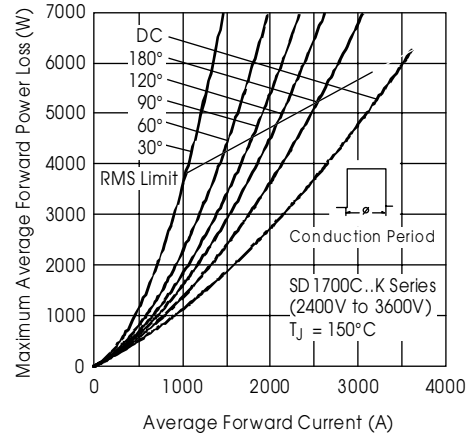


Fig. 10 - Forward Power Loss Characteristics

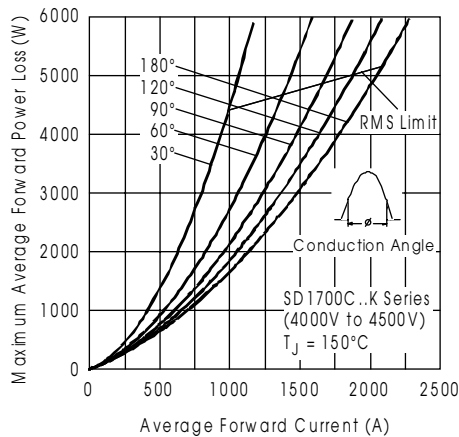


Fig. 11 - Forward Power Loss Characteristics

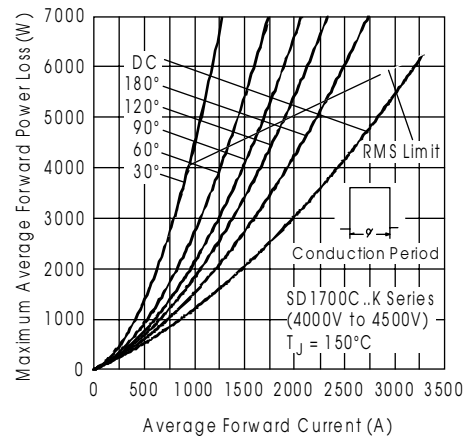


Fig. 12 - Forward Power Loss Characteristics

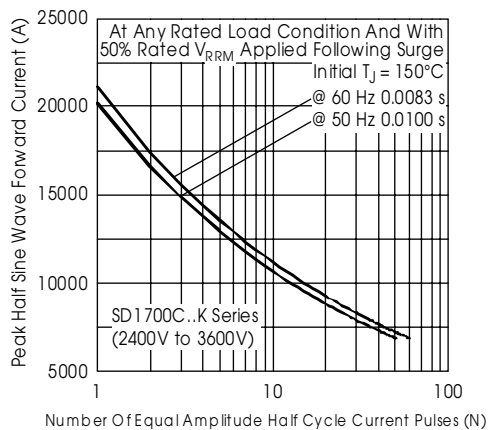


Fig. 13 - Maximum Non-Repetitive Surge Current
Single and Double Side Cooled

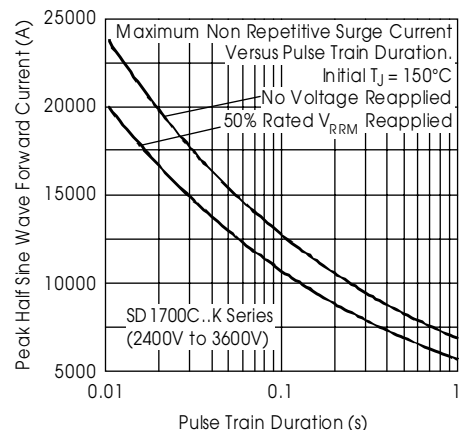


Fig. 14 - Maximum Non-Repetitive Surge Current
Single and Double Side Cooled

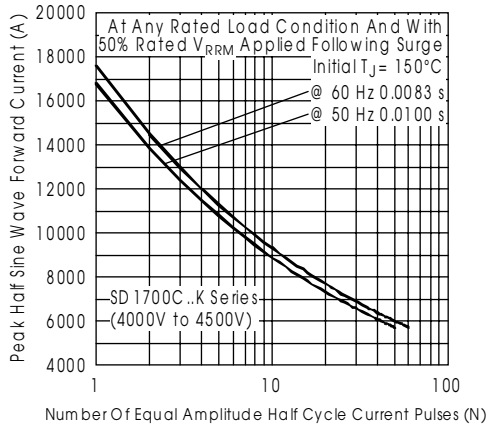


Fig. 15 - Maximum Non-Repetitive Surge Current Single and Double Side Cooled

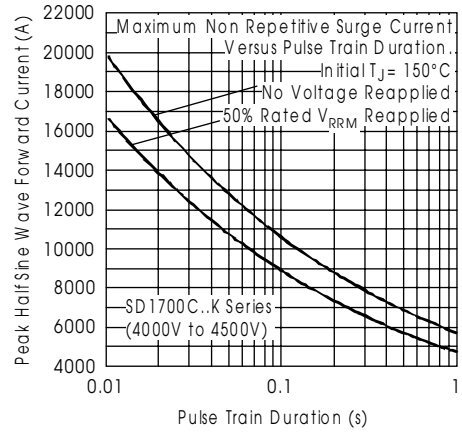


Fig. 16 - Maximum Non-Repetitive Surge Current Single and Double Side Cooled

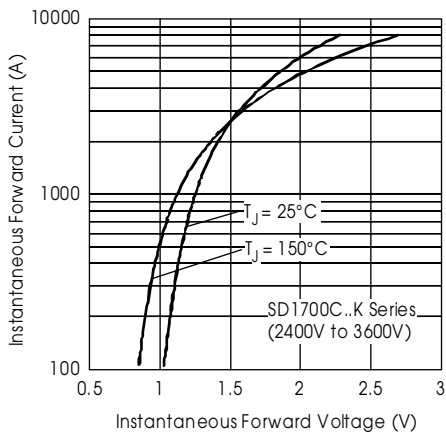


Fig. 17 - Forward Voltage Drop Characteristics

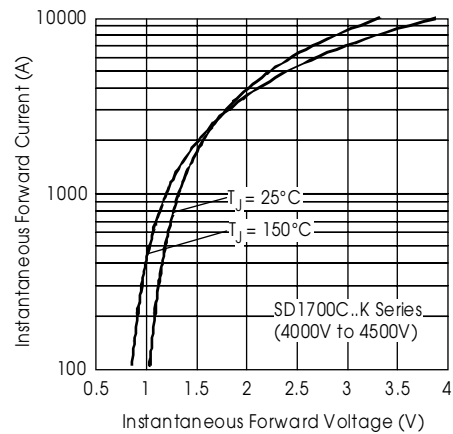


Fig. 18 - Forward Voltage Drop Characteristics

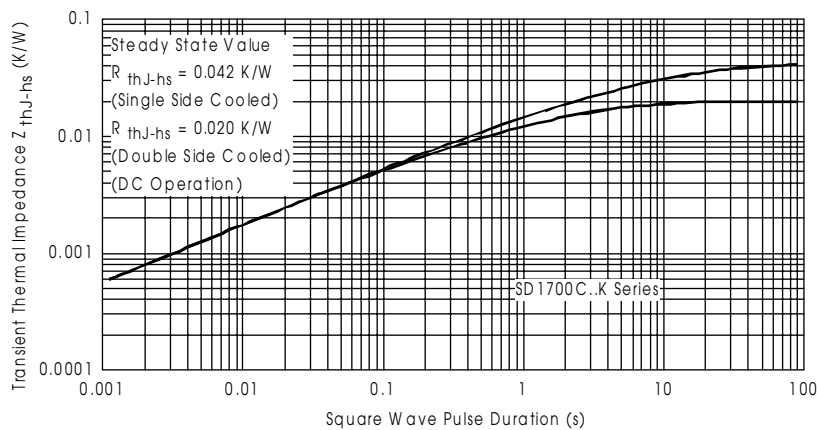


Fig. 19 - Thermal Impedance Z_{thJC} Characteristics