

General Description

The AAT4644 is a four-channel resettable fuse. It utilizes independent current-limited and thermally protected P-channel MOSFETs to protect against short circuits. Each switch's current limit is factory programmed at 1A. Additional protection is provided with undervoltage lockout; the switches are turned off when the input voltage drops below a preset level. The quiescent supply current is typically 20µA. The AAT4644 is a flexible solution, allowing system designers to gang outputs together for lower $R_{DS(ON)}$ and higher current limit.

The AAT4644 is available in 8 pin TSSOP or SOP packages, specified over -40 to 85°C.


Features

- 500mA per channel steady state
- 4 X 1A current limit trip point
- Over-temp protection
- Fast transient response:
 - 1µs (typ) response to short circuit
- 100mΩ typical $R_{DS(ON)}$
- Undervoltage Lockout
- Temp range -40 to 85°C
- 8 pin TSSOP or SOP packages

Applications

- USB ports
- Peripheral ports
- Desktop PCs


Typical Application

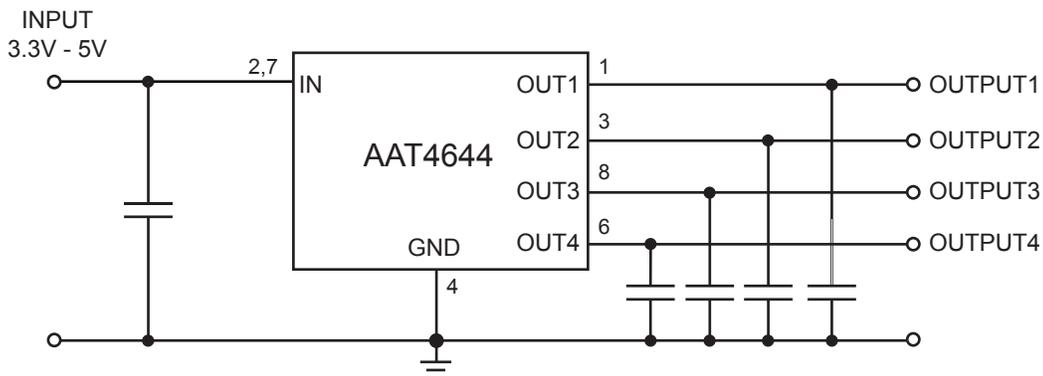

Pin Descriptions

| Pin # | Symbol | Function |
|-------|--------|--|
| 1 | OUT1 | Channel 1 output |
| 2, 7 | IN | These pins are the input supply to the circuit |
| 3 | OUT2 | Channel 2 output |
| 4 | GND | Ground connection |
| 5 | NC | Not internally connected |
| 6 | OUT4 | Channel 4 output |
| 8 | OUT3 | Channel 3 output |

Pin Configuration

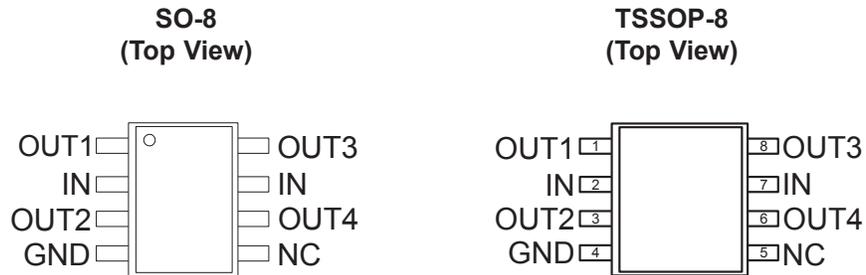

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

| Symbol | Description | Value | Units |
|------------|--|--------------------|------------------|
| V_{IN} | IN to GND | -0.3 to 6 | V |
| V_{OUT} | OUT to GND | -0.3 to 6 | V |
| I_{OUT} | Output Current | Internally Limited | A |
| T_J | Operating Junction Temperature Range | -40 to 85 | $^\circ\text{C}$ |
| V_{ESD} | ESD Rating ¹ —HBM | 4000 | V |
| T_{LEAD} | Maximum Soldering Temperature (at Leads) | 300 | $^\circ\text{C}$ |

Note: Stresses above those listed in Absolute Maximum Ratings may cause permanent damage to the device. Functional operation at conditions other than the operating conditions specified is not implied. Only one Absolute Maximum rating should be applied at any one time.

Note 1: Human body model is a 100pF capacitor discharged through a 1.5k Ω resistor into each pin.

Thermal Characteristics

| Symbol | Description | Value | Units |
|---------------|----------------------------|-------|---------------------------|
| Θ_{JA} | Maximum Thermal Resistance | 100 | $^\circ\text{C}/\text{W}$ |
| P_D | Maximum Power Dissipation | 1.25 | W |

Note 2: Mounted on a demo board.


Electrical Characteristics ($V_{IN} = 5\text{V}$, $T_A = -40$ to 85°C unless otherwise noted. Typical values are at $T_A=25^\circ\text{C}$; **bold** values designate full temperature range)

| Symbol | Description | Conditions | Min | Typ | Max | Units |
|-----------------|---------------------------------|---|------------|------|------------|------------------|
| V_{IN} | Operation Voltage | | 2.7 | | 5.5 | V |
| I_Q | Quiescent Current | $V_{in} = 5\text{V}$, $I_{out} = 0$ | | 20 | 40 | μA |
| V_{UVLO} | Undervoltage Lockout | Rising edge | | 1.75 | | V |
| $V_{UVLO(hys)}$ | Undervoltage Lockout Hysteresis | | | 0.3 | | V |
| $R_{DS(ON)}$ | On-Resistance | $V_{in}=5.0\text{V}$, $T_A = 25^\circ\text{C}$ | | 100 | 125 | m Ω |
| I_{LIM} | Current Limit | Each output $OUT < IN - 1\text{V}$ | 0.6 | 1.0 | 1.5 | A |
| t_{RESP} | Current Loop Response | $V_{in}=5\text{V}$ | | 1 | | μs |
| T_{SD} | Over-temperature threshold | | | 125 | | $^\circ\text{C}$ |


Typical Characteristics

($T_A = 25^\circ\text{C}$ unless otherwise noted)


Quiescent Current vs. Temperature

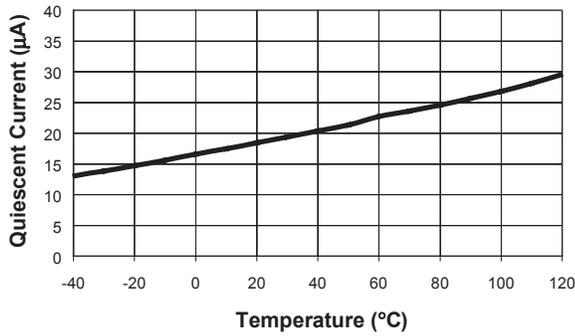


Quiescent Current

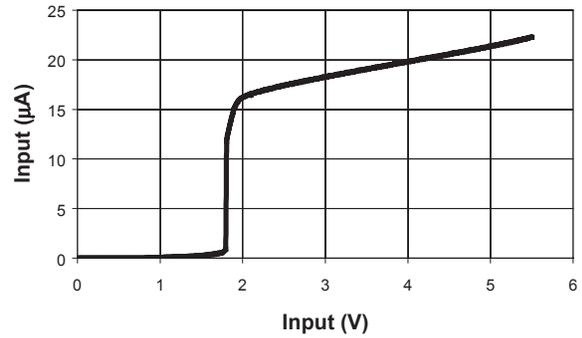


Current Limit

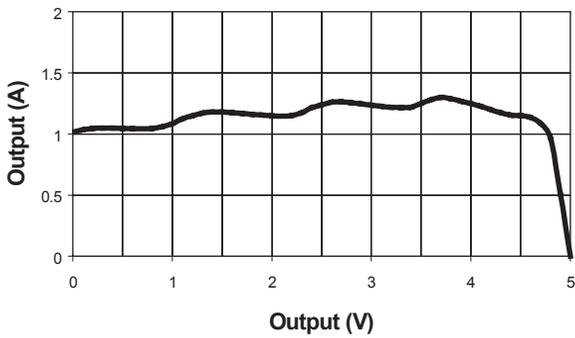


Short Circuit Through 0.3 Ohm

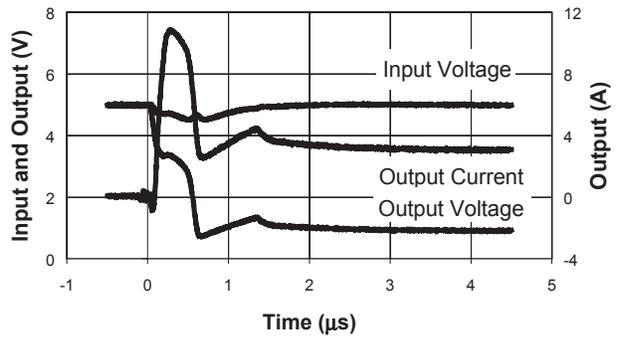

Short Circuit Through 0.6 Ohm

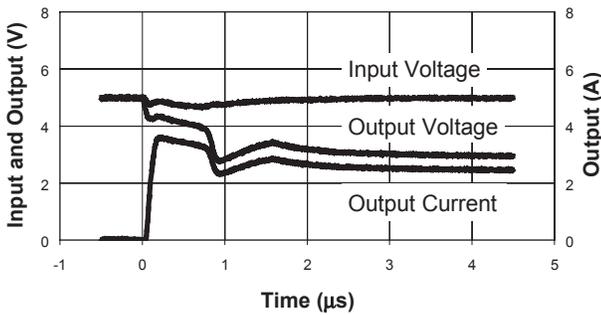


Thermal Shutdown Response 0.3 Ω Load

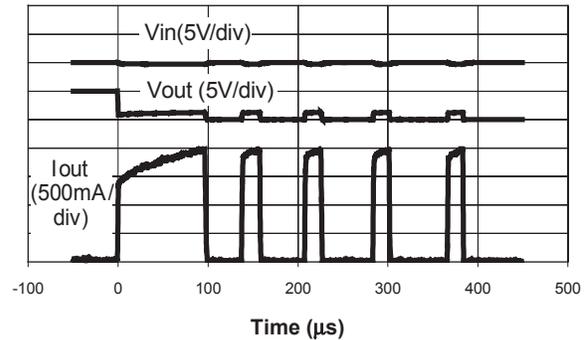


($T_A = 25^\circ\text{C}$ unless otherwise noted)

Rdson vs. Temperature

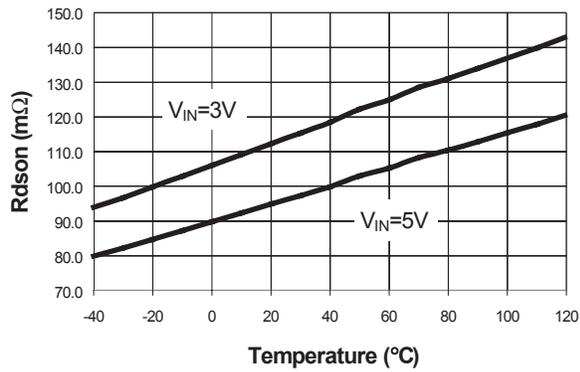

Block Diagram

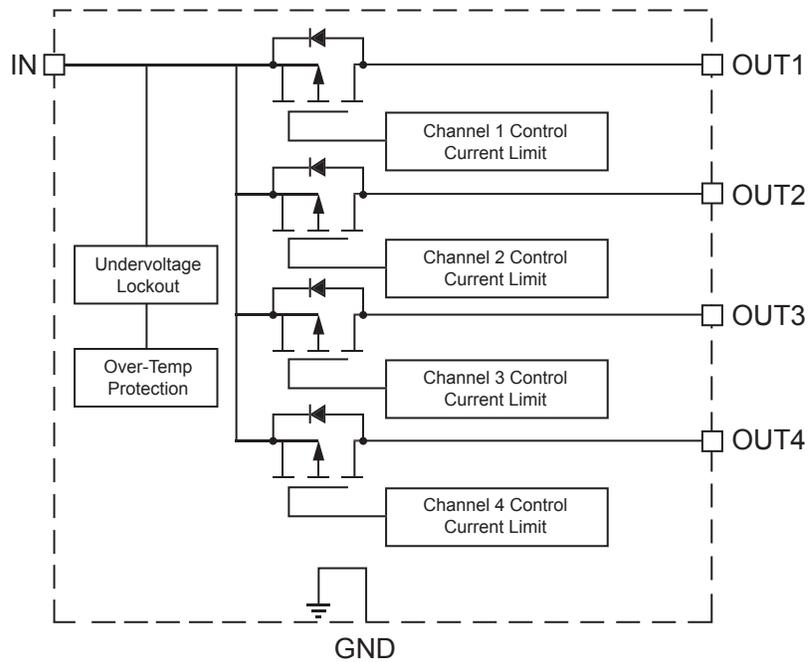




Ordering Information

| Package | Marking | Part Number (Tape and Reel) |
|---------|---------|-----------------------------|
| SOP8 | 4644 | AAT4644IAS-T1 |
| TSSOP8 | 4644 | AAT4644IHS-T1 |

Note: Sample stock is generally held on all part numbers listed in **BOLD**.
 Note 1: XYY = assembly and date code.




Package Information

SOP-8

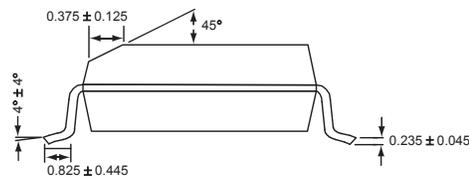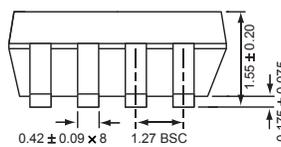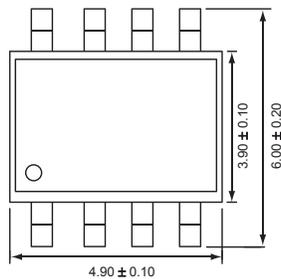

All dimensions in millimeters.

TSSOP-8

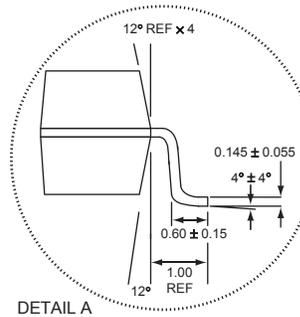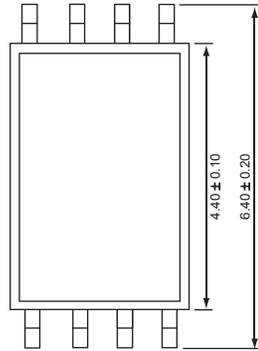

All dimensions in millimeters.

AnalogicTech cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in an AnalogicTech product. No circuit patent licenses, copyrights, mask work rights, or other intellectual property rights are implied.

AnalogicTech reserves the right to make changes to their products or specifications or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

AnalogicTech warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with AnalogicTech's standard warranty. Testing and other quality control techniques are utilized to the extent AnalogicTech deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed.

Advanced Analogic Technologies, Inc.
830 E. Arques Avenue, Sunnyvale, CA 94085
Phone (408) 737-4600
Fax (408) 737-4611