

SINGLE-SUPPLY DUAL OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION


The NJM3404A is high performance single supply dual operational amplifier. The NJM3404A is a half type of the NJM3403A, quad operational amplifier.

The NJM3404A is improved version of the NJM2904 on slew rate & cross-over distortion.

■ FEATURES

- Single Supply
- Operating Voltage (+4V ~ +36V)
- Low Operating Current (2.0mA typ.)
- Slew Rate (1.2V/ μ s typ.)
- Package Outline DIP8, DMP8, SIP8, SSOP8
- Bipolar Technology

■ PACKAGE OUTLINE




NJM3404AD



NJM3404AM




NJM3404AV




NJM3404AL

*S-Type (SIP-9) available

■ PIN CONFIGURATION



NJM3404AD
NJM3404AM
NJM3404AV




NJM3404AL

PIN FUNCTION

1. A OUTPUT
2. A-INPUT
3. A+INPUT
4. V⁻
5. B+INPUT
6. B-INPUT
7. B OUTPUT
8. V⁺

■ EQUIVALENT CIRCUIT (1/2 Shown)

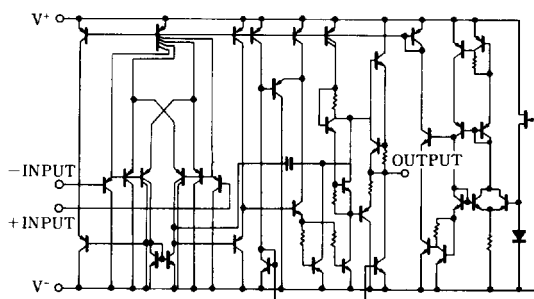



■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V^+(V^+/V^-)$	36V(or ± 18)	V
Differential Input Voltage	V_{ID}	36	V
Input Voltage	V_I	-0.3~36	V
Power Dissipation	P_D	(DIP8) 500	mW
		(DMP8) 300	mW
		(SSOP8) 250	mW
		(SIP8) 800	mW
Operating Temperature Range	T_{opr}	-20~+75	°C
Storage Temperature Range	T_{stg}	-40~+125	°C

■ ELECTRICAL CHARACTERISTICS


(Ta=25°C, $V^+/V^- = \pm 15V$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V_{IO}	$R_S = 0\Omega$	—	2	5	mV
Input Offset Current	I_{IO}		—	5	50	nA
Input Bias Current	I_B		—	70	200	nA
Large Signal Voltage Gain	A_V	$R_L > 2k\Omega$	88	100	—	dB
Maximum Output Voltage Swing	V_{OM}	$R_L = 2k\Omega$	± 13	± 14	—	V
Input Common Mode Voltage Range	V_{ICM}		-15~+13	—	—	V
Common Mode Rejection Ratio	CMR	DC	70	90	—	dB
Supply Voltage Rejection Ratio	SVR		80	94	—	dB
Operating Current	I_{CC}	$R_L = \infty$	—	2.0	3.5	mA
Output Source Current	I_{SOURCE}	$V_{IN}^+ = 1V, V_{IN}^- = 0V$	20	30	—	mA
Output Sink Current	I_{SINK}	$V_{IN}^+ = 0V, V_{IN}^- = 1V$	10	20	—	mA
Slew Rate	SR		—	1.2	—	V/ μ S
Unity Gain Bandwidth	f_T	—	—	1.2	—	MHz




TYPICAL CHARACTERISTICS


Voltage Gain vs. Frequency

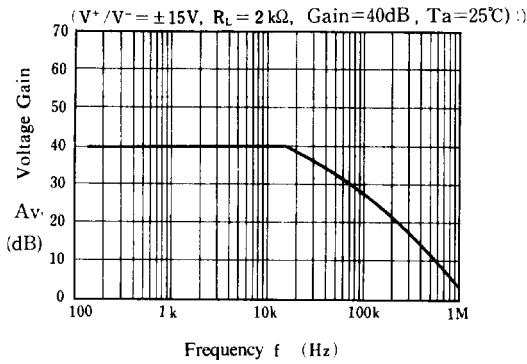


Maximum Output Voltage Swing vs. Load Resistance

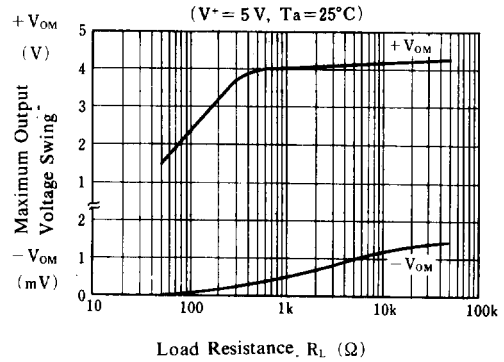


Operating Current vs. Temperature

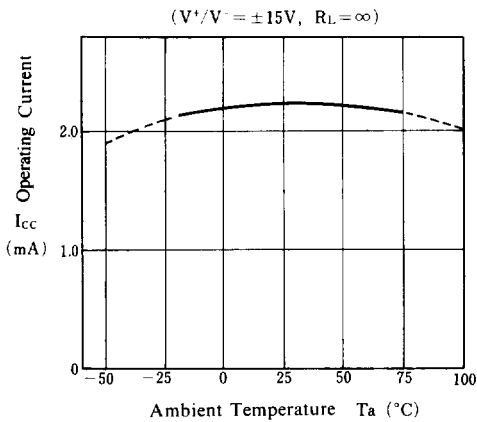


Output Source Current vs. Temperature

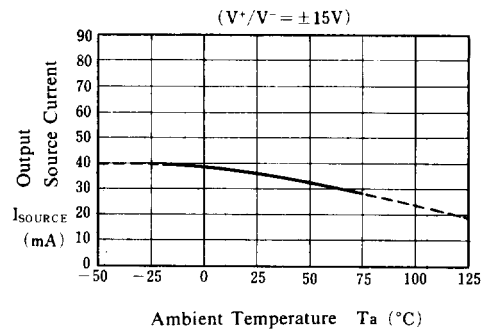

Input Offset Voltage vs. Temperature

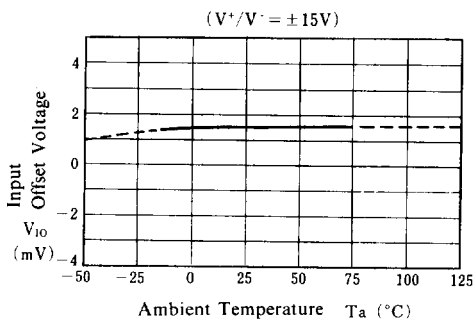

Input Bias Current vs. Temperature

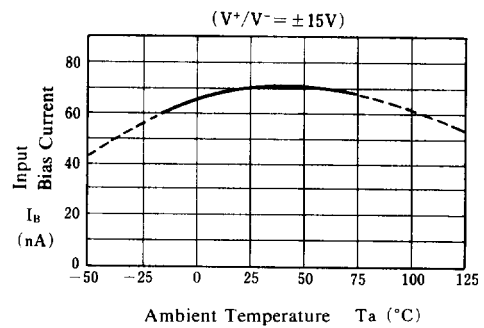





TYPICAL CHARACTERISTICS

**Output Source Current
Output Sink Current
vs. Output Voltage Swing**

($V^+/V^- = \pm 15V$, $T_a = 25^\circ C$)

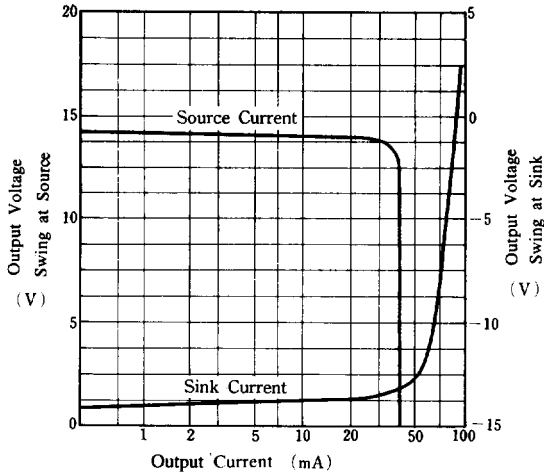


**Operating Current
vs. Operating Voltage**

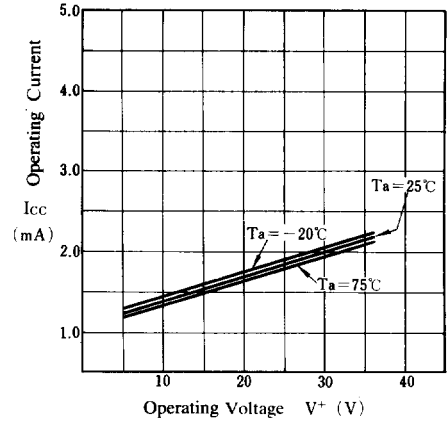


Output Voltage Swing vs. Operating Voltage

($R_L = 2k\Omega$, $T_a = 25^\circ C$)

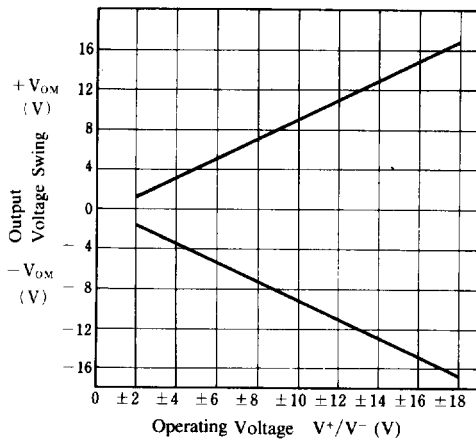


Pulse Response

($V^+/V^- = \pm 15V$, $R_L > 2k\Omega$, $A_v = 1$, $T_a = 25^\circ C$)

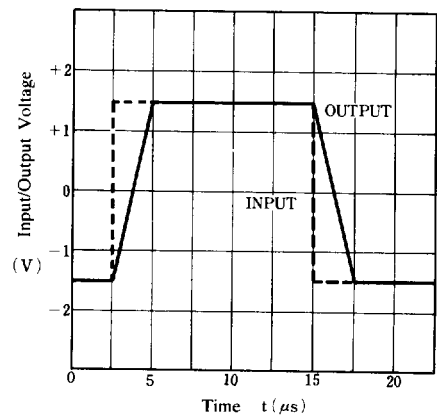


Maximum Output Voltage vs. Frequency

($V^+/V^- = \pm 15V$, $R_L = 2k\Omega$, $T_a = 25^\circ C$)

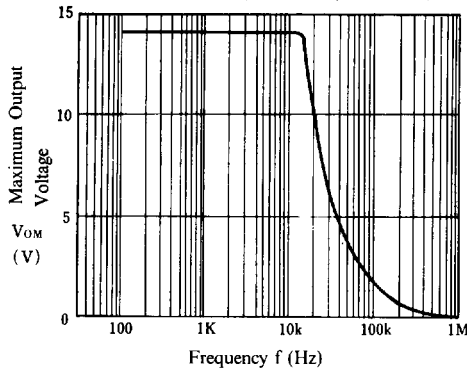

Maximum Output Voltage vs. Temperature


($V^+/V^- = \pm 15V$, $R_L = 2k\Omega$)

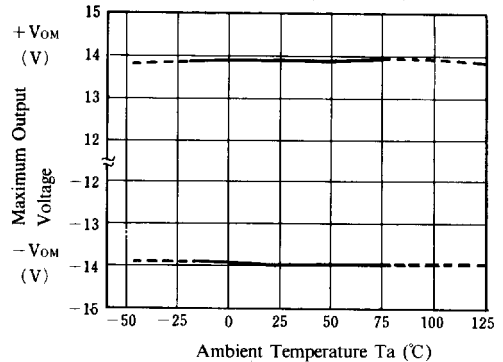



■ TYPICAL APPLICATIONS

Square Wave Oscillator

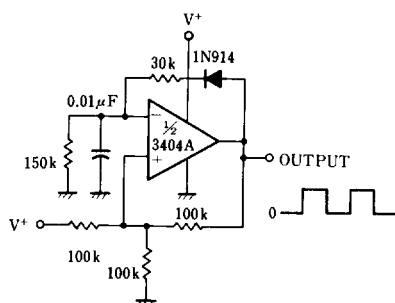

Bandpass Filter

