



AWL6152

2.4 GHz Wireless LAN
Power Amplifier Module

ADVANCED PRODUCT INFORMATION - Rev 0.1

FEATURES

- InGaP HBT Technology
- < 3% EVM at +26 dBm Output Power (+5 V Supply), with 802.11g Modulation at 54 Mbps Data Rate
- < 3% EVM at +22 dBm Output Power (+3.3 V Supply), with 802.11g Modulation at 54 Mbps Data Rate
- +3 V to +5 V Supply
- High Efficiency
- 4 x 4 x 1.5 mm Surface Mount Module
- 50 Ω - Matched RF Ports for Reduced External Component Count

APPLICATIONS

- 802.11g/b WLAN Stations and Client Cards
- 802.11g/b WLAN Access Points



M7 Package
10 Pin 4mm x 4mm
Surface Mount Module

PRODUCT DESCRIPTION

The ANADIGICS AWL6152 WLAN Power Amplifier is an easy to use module that delivers high levels of linearity and efficiency for high data rate applications. Designed for the 2.4 GHz WLAN standards, it supports the 54 Mbps data rates specified in IEEE 802.11g.

Requiring a single +3 V to +5 V supply and a reference voltage input, the AWL6152 reduces system power consumption by offering a low leakage current while the amplifier is shut down.

No external circuits are required for RF impedance matching, thus reducing component costs and making it easy to incorporate the device into new designs.

The AWL6152 is manufactured using an advanced InGaP HBT technology that offers state-of-the-art reliability, temperature stability and ruggedness. It is offered in a 4mm x 4mm x 1.5mm surface mount module optimized for a 50 Ω system.

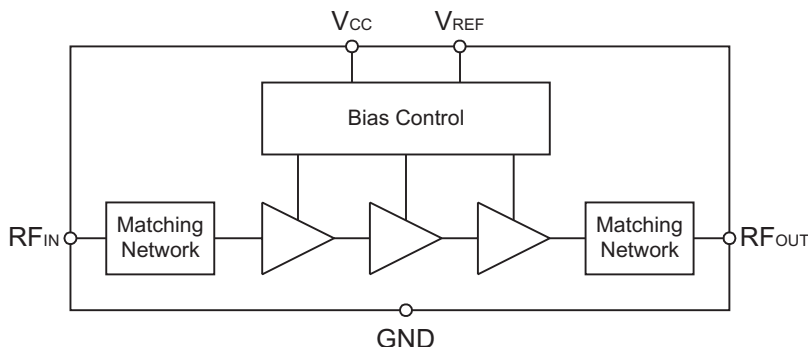


Figure 1: Module Block Diagram

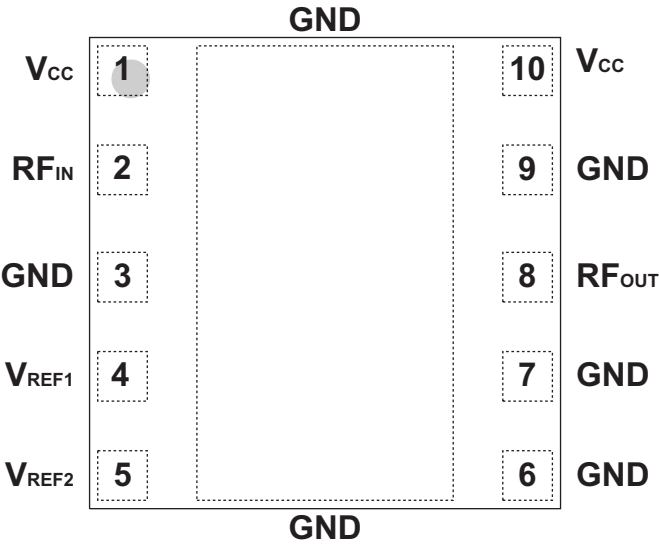


Figure 2: Pinout (X-ray Top View)

Table 1: Pin Description

PIN	NAME	DESCRIPTION
1	V _{CC}	Supply Voltage
2	RF _{IN}	RF Input
3	GND	Ground
4	V _{REF1}	Reference Voltage 1
5	V _{REF2}	Reference Voltage 2
6	GND	Ground
7	GND	Ground
8	RF _{OUT}	RF Output
9	GND	Ground
10	V _{CC}	Supply Voltage

ELECTRICAL CHARACTERISTICS

Table 2: Absolute Minimum and Maximum Ratings

PARAMETER	MIN	MAX	UNIT
Supply Voltage (V_{CC})	0	+5.5	V
Reference Voltages (V_{REF1} , V_{REF2})	0	+3.5	V
RF Input Power (P_{IN})	-	+10	dBm
Storage Temperature	-40	+150	°C

Stresses in excess of the absolute ratings may cause permanent damage. Functional operation is not implied under these conditions. Exposure to absolute ratings for extended periods of time may adversely affect reliability.

Table 3: Operating Ranges

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS
Operating Frequency (f)	2400	-	2485	MHz	
Supply Voltage (V_{CC})	+3.0	-	+5.5	V	
Reference Voltages (V_{REF1} , V_{REF2})	- 0	+2.85 -	- +0.5	V	PA"on" PA"shut down"
RF Output Power (P_{OUT})	- - - -	+22 +26 +26 +30	- - - -	dBm	V_{CC} = +3.3 V, 802.11g modulation V_{CC} = +5.0 V, 802.11g modulation V_{CC} = +3.3 V, 802.11b modulation V_{CC} = +5.0 V, 802.11b modulation
Case Temperature (T_C)	-25	-	+85	°C	

The device may be operated safely over these conditions; however, parametric performance is guaranteed only over the conditions defined in the electrical specifications.

Table 4: Electrical Specifications - 802.11g Modulation, 54 Mbps Data Rate
($T_C = +25\text{ }^{\circ}\text{C}$, $V_{CC} = +3.3\text{ V}$, $V_{REF1} = V_{REF2} = +2.85\text{ V}$, $P_{OUT} = +22\text{ dBm}$, $50\text{ }\Omega$ system)

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS
Gain	-	30	-	dB	
Gain Ripple	-	-	0.3	dB	within each channel
Constellation RMS Error	- -	2.5 -32	- -	% dB	
Spectrum Mask at $\pm 11\text{ MHz}$ Offset	-	-30	-20	dB	
Spectrum Mask at $\pm 20\text{ MHz}$ Offset	-	-45	-28	dB	
Spectrum Mask at $\pm 30\text{ MHz}$ Offset	-	-50	-40	dB	
Current Consumption V_{CC} V_{REF1} V_{REF2}	- - -	245 3.5 2	- - -	 mA	
Leakage Current	-	<10	-	μA	$V_{REF1} = V_{REF2} = 0\text{ V}$
Input Return Loss	-	<-10	-	dB	$50\text{ }\Omega$ impedance
Harmonics 2fo 3fo	- - -	-45 -56	- -	 dBc	
Maximum load mismatch stress with no permanent degradation or failure	10:1	-	-	VSWR	$V_{CC} = +5.5\text{ V}$

Table 5: Electrical Specifications - 802.11g Modulation, 54 Mbps Data Rate
(T_C = +25 °C, V_{CC} = +5 V, V_{REF1} = V_{REF2} = +2.85 V, P_{OUT} = +26 dBm, 50 Ω system)

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS
Gain	-	30	-	dB	
Gain Ripple	-	-	0.3	dB	within each channel
Constellation RMS Error	- -	3 -30	- -	% dB	
Spectrum Mask at ±11 MHz Offset	-	-30	-20	dB	
Spectrum Mask at ±20 MHz Offset	-	-42	-28	dB	
Spectrum Mask at ±30 MHz Offset	-	-50	-40	dB	
Current Consumption V _{CC} V _{REF1} V _{REF2}	- - -	355 3.5 2	- - -	 mA	
Leakage Current	-	<10	-	μA	V _{REF1} = V _{REF2} = 0 V
Input Return Loss	-	<-10	-	dB	50 Ω impedance
Harmonics 2fo 3fo	- - -	-42 -56	- -	 dBc	
Maximum load mismatch stress with no permanent degradation or failure	10:1	-	-	VSWR	V _{CC} = +5.5 V

Table 6: Electrical Specifications - 802.11b Modulation
(T_C = +25 °C, V_{CC} = +3.3 V, V_{REF1} = V_{REF2} = +2.85 V, P_{OUT} = +26 dBm, 50 Ω system)


PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS
Gain	-	30	-	dB	
First Sidelobe Power	-	-	-30	dBc	
Second Sidelobe Power	-	-	-50	dBc	
Current Consumption V _{CC} V _{REF1} V _{REF2}	- - -	350 3.5 2	- - -	mA	
Leakage Current	-	<10	-	μA	V _{REF1} = V _{REF2} = 0 V
Input Return Loss	-	<-10	-	dB	50 Ω impedance
Harmonics 2fo 3fo	- - -	-50 -63	- - -	dBc	CW Input
Maximum load mismatch stress with no permanent degradation or failure	10:1	-	-	VSWR	V _{CC} = +5.5 V

Table 7: Electrical Specifications - 802.11b Modulation
($T_C = +25\text{ }^{\circ}\text{C}$, $V_{CC} = +5\text{ V}$, $V_{REF1} = V_{REF2} = +2.85\text{ V}$, $P_{OUT} = +30\text{ dBm}$, $50\text{ }\Omega$ system)

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS
Gain	-	30	-	dB	
First Sidelobe Power	-	-	-30	dBc	
Second Sidelobe Power	-	-	-50	dBc	
Current Consumption V_{CC} V_{REF1} V_{REF2}	- - -	570 3.5 2	- - -	mA	
Leakage Current	-	<10	-	μA	$V_{REF1} = V_{REF2} = 0\text{ V}$
Input Return Loss	-	<-10	-	dB	$50\text{ }\Omega$ impedance
Harmonics 2fo 3fo	- - -	-50 -63	- -	dBc	CW Input
Maximum load mismatch stress with no permanent degradation or failure	10:1	-	-	VSWR	$V_{CC} = +5.5\text{ V}$

PERFORMANCE DATA


Figure 3: Typical EVM⁽¹⁾ vs. Output Power
 ($T_A = +25\text{ }^{\circ}\text{C}$, $V_{REF1} = V_{REF2} = +2.85\text{ V}$)
 802.11g modulation, 54 Mbps data rate)

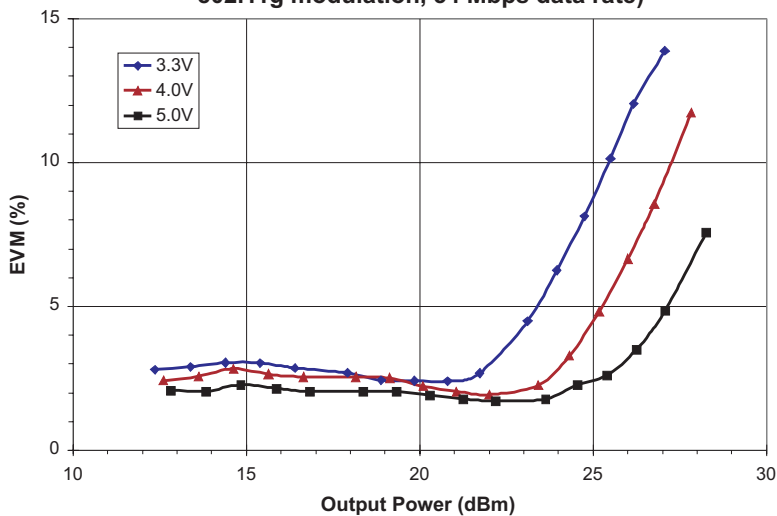

Notes:

(1) Uncorrected EVM. Source EVM approx. 1.2%.

Figure 4: Typical Current vs. Output Power
 ($T_A = +25\text{ }^{\circ}\text{C}$, $V_{REF1} = V_{REF2} = +2.85\text{ V}$)
 802.11g modulation, 54 Mbps data rate)

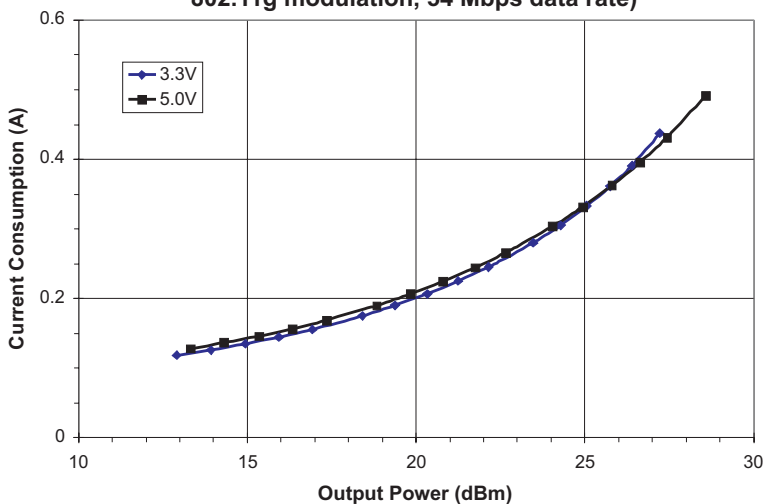

APPLICATION INFORMATION

The only external components required for the AWL6152 are bypass capacitors for the supply and reference voltages (see Figure 3). V_{REF1} and V_{REF2}

may be tied together, and when both are pulled down to 0 V, the amplifier is placed in a low-current shut down mode.


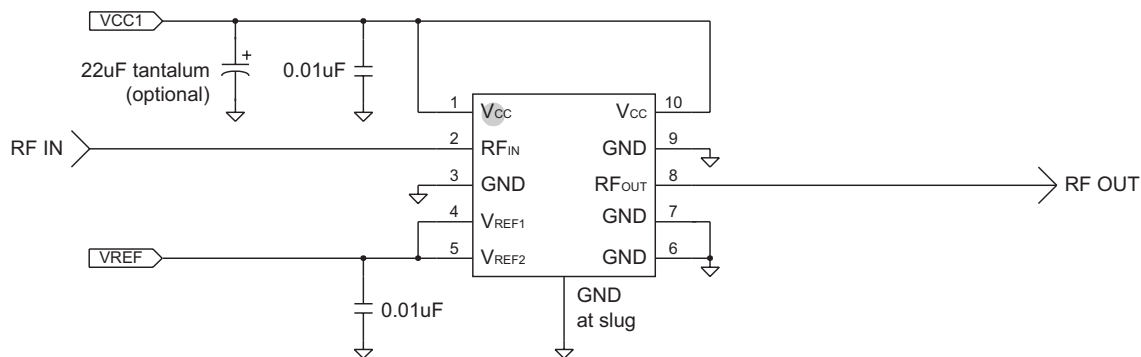


Figure 5: Application Circuit

PACKAGE OUTLINE

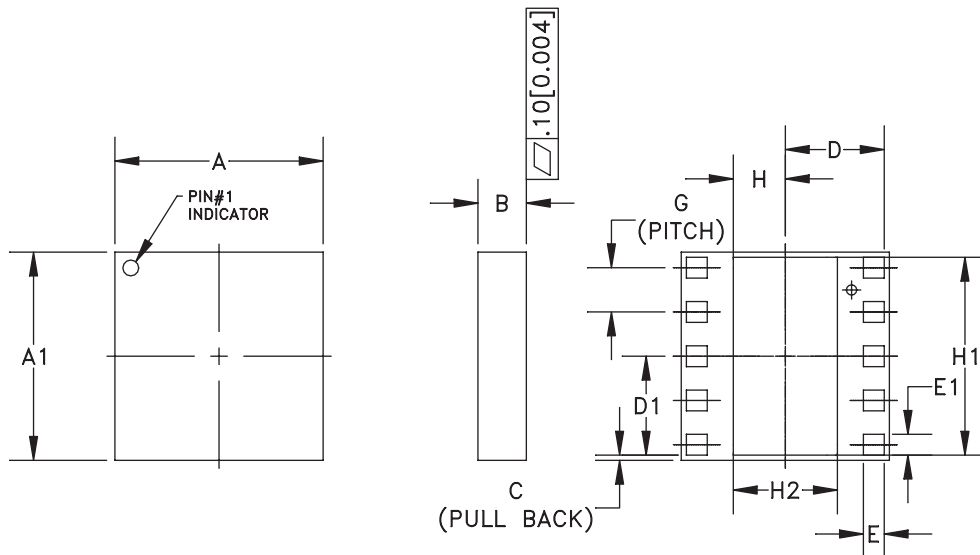

	MILLIMETERS			INCHES			NOTE
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.	
A	3.88	4.00	4.12	0.152	0.157	0.162	—
A1	3.88	4.00	4.12	0.152	0.157	0.162	—
B	1.26	1.41	1.56	0.049	0.055	0.061	—
C	—	0.10	—	—	0.004	—	—
D	—	1.90	—	—	0.075	—	—
D1	—	1.90	—	—	0.075	—	—
E	0.35	0.40	0.45	0.013	0.015	0.017	—
E1	0.35	0.40	0.45	0.013	0.015	0.017	—
G	0.85 BSC			0.033 BSC			—
H	—	1.00	—	—	0.039	—	—
H1	—	3.80	—	—	0.149	—	—
H2	—	2.00	—	—	0.078	—	—

NOTES:

1. CONTROLLING DIMENSIONS: MILLIMETERS
2. UNLESS SPECIFIED TOLERANCE=±0.076[0.003].

Figure 6: M7 Package Outline - 10 Pin 4mm x 4mm Surface Mount Module

NOTES

ORDERING INFORMATION

ORDER NUMBER	TEMPERATURE RANGE	PACKAGE DESCRIPTION	COMPONENT PACKAGING
AWL6152M7P8	-25 °C to +85°C	10 Pin 4mm x 4mm Surface Mount Module	2,500 piece Tape and Reel

**ANADIGICS, Inc.**

141 Mount Bethel Road
Warren, New Jersey 07059, U.S.A.

Tel: +1 (908) 668-5000

Fax: +1 (908) 668-5132

URL: <http://www.anadigics.com>

E-mail: Mktg@anadigics.com

IMPORTANT NOTICE

ANADIGICS, Inc. reserves the right to make changes to its products or to discontinue any product at any time without notice. The product specifications contained in Advanced Product Information sheets and Preliminary Data Sheets are subject to change prior to a product's formal introduction. Information in Data Sheets have been carefully checked and are assumed to be reliable; however, ANADIGICS assumes no responsibilities for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

WARNING

ANADIGICS products are not intended for use in life support appliances, devices or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.