


TOSHIBA TRANSISTOR
SILICON NPN EPITAXIAL TYPE (PCT PROCESS) SILICON PNP EPITAXIAL TYPE (PCT PROCESS)

RN4982

SWITCHING, INVERTER CIRCUIT, INTERFACE CIRCUIT
AND DRIVER CIRCUIT APPLICATIONS

- Including Two Devices in US6 (Ultra Super Mini Type with 6 leads)
- With Built-in Bias Resistors
- Simplify Circuit Design
- Reduce a Quantity of Parts and Manufacturing Process

EQUIVALENT CIRCUIT AND BIAS RESISTOR VALUES

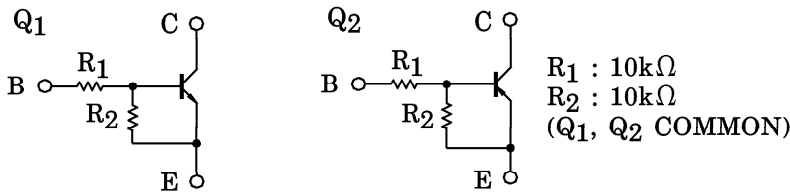

Q1 MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	VCBO	50	V
Collector-Emitter Voltage	VCEO	50	V
Emitter-Base Voltage	VEBO	10	V
Collector Current	IC	100	mA

Q2 MAXIMUM RATINGS (Ta = 25°C)


CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	VCBO	-50	V
Collector-Emitter Voltage	VCEO	-50	V
Emitter-Base Voltage	VEBO	-10	V
Collector Current	IC	-100	mA

Q1, Q2 COMMON MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector Power Dissipation	PC ※	200	mW
Junction Temperature	Tj	150	°C
Storage Temperature Range	Tstg	-55~150	°C


※ : Total Rating

Unit in mm

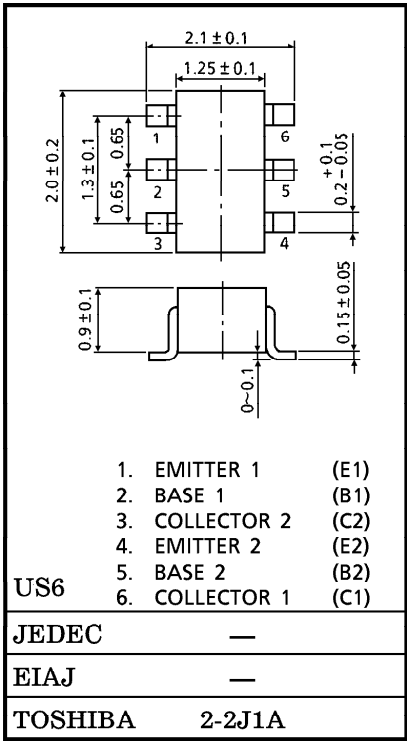


Weight : 6.8mg

MARKING



EQUIVALENT CIRCUIT (TOP VIEW)



961001EAA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

Q1 ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=50V, I_E=0$	—	—	100	nA
	I_{CEO}	$V_{CE}=50V, I_B=0$	—	—	500	
Emitter Cut-off Current	I_{EBO}	$V_{EB}=10V, I_C=0$	0.38	—	0.71	mA
DC Current Gain	h_{FE}	$V_{CE}=5V, I_C=10mA$	50	—	—	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=5mA, I_B=0.25mA$	—	0.1	0.3	V
Input Voltage (ON)	$V_{I(ON)}$	$V_{CE}=0.2V, I_C=5mA$	1.2	—	2.4	V
Input Voltage (OFF)	$V_{I(OFF)}$	$V_{CE}=5V, I_C=0.1mA$	1.0	—	1.5	V
Transition Frequency	f_T	$V_{CE}=10V, I_C=5mA$	—	250	—	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=10V, I_E=0, f=1MHz$	—	3	6	pF

Q2 ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=-50V, I_E=0$	—	—	-100	nA
	I_{CEO}	$V_{CE}=-50V, I_B=0$	—	—	-500	
Emitter Cut-off Current	I_{EBO}	$V_{EB}=-10V, I_C=0$	-0.38	—	-0.71	mA
DC Current Gain	h_{FE}	$V_{CE}=-5V, I_C=-10mA$	50	—	—	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-5mA, I_B=-0.25mA$	—	-0.1	-0.3	V
Input Voltage (ON)	$V_{I(ON)}$	$V_{CE}=-0.2V, I_C=-5mA$	-1.2	—	-2.4	V
Input Voltage (OFF)	$V_{I(OFF)}$	$V_{CE}=-5V, I_C=-0.1mA$	-1.0	—	-1.5	V
Transition Frequency	f_T	$V_{CE}=-10V, I_C=-5mA$	—	200	—	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=-10V, I_E=0, f=1MHz$	—	3	6	pF




Q1, Q2 COMMON ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Resistor	R1	—	7	10	13	kΩ
Resistor Ratio	R1 / R2	—	0.9	1.0	1.1	

961001EAA2'

- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

Q₁

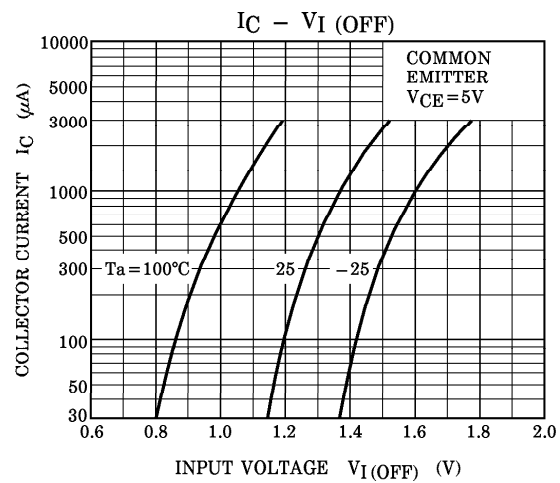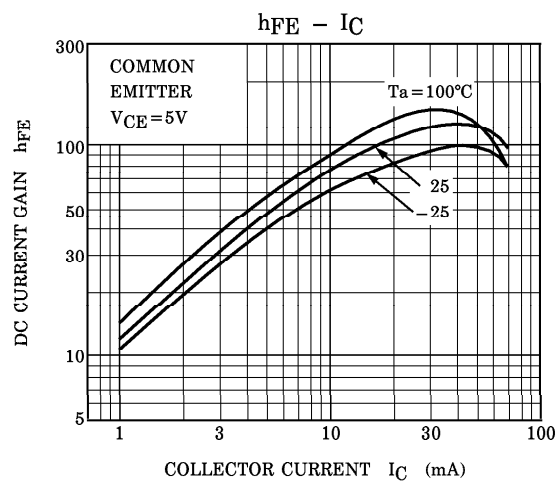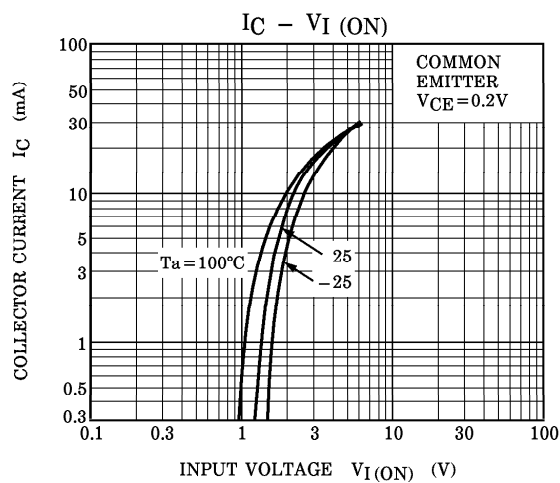

Q₂

