




Chip Array Ferrite Bead

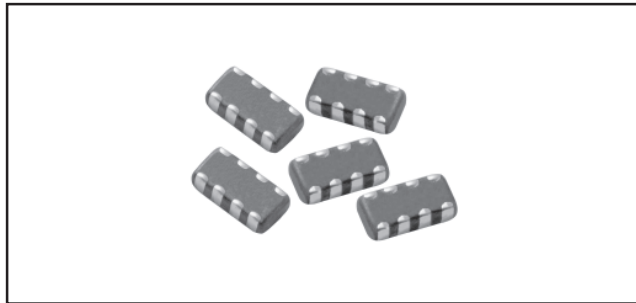


FEATURES

- Combines four single 0402 chips into one package to reduce board space and placement time.
- Highly effective in high density applications.
- 0.031" [0.8mm] terminal pitch makes it easy to apply EMI prevention in multiple-lines such as connectors and IC pins.
- Material and construction design minimize crosstalk between adjacent circuits.

STANDARD ELECTRICAL SPECIFICATIONS

PART NUMBER	PACKAGE SIZE	Z @ 100MHz (± 25%)	DCR MAX. (Ohms)	RATED DC CURRENT (mA)	SIGNAL SPEED
ILAL	1206-99	120	0.2	150	LOW
		300	0.4	100	
		600	0.6	100	
		1000	0.8	50	
ILAS	1206-99	60	0.12	300	STANDARD
		120	0.2	150	
		300	0.4	100	
		600	0.6	100	
		1000	0.8	50	

DIMENSIONAL CONFIGURATIONS [Numbers in brackets indicate millimeters]

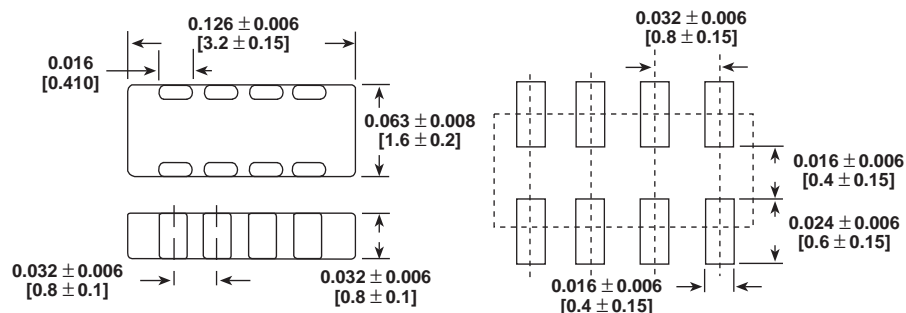

HOW TO ORDER

ILAL
ILAS
MODEL

1206-99
SIZE

120
IMPEDANCE
VALUE

± 25%
IMPEDANCE
TOLERANCE