

Product Preview  
2-Input AND Gate

The MC74VHC1G08 is an advanced high speed CMOS 2-input AND gate fabricated with silicon gate CMOS technology. It achieves high speed operation similar to equivalent Bipolar Schottky TTL while maintaining CMOS low power dissipation.

The internal circuit is composed of three stages, including a buffer output which provides high noise immunity and stable output.

The MC74VHC1G08 input structure provides protection when voltages up to 7V are applied, regardless of the supply voltage. This allows the MC74VHC1G08 to be used to interface 5V circuits to 3V circuits.

- High Speed:  $t_{PD} = 4.3ns$  (Typ) at  $V_{CC} = 5V$
- Low Power Dissipation:  $I_{CC} = 2\mu A$  (Max) at  $T_A = 25^{\circ}C$
- Power Down Protection Provided on Inputs
- Balanced Propagation Delays
- Pin and Function Compatible with Other Standard Logic Families
- Latchup Performance Exceeds 300mA
- ESD Performance: HBM > 2000V; MM > 200V, CDM > 1500V
- Chip Complexity: 6 FETs or 2 Equivalent Gates




Figure 1. 5-Lead SOT-353 Pinout (Top View)





Figure 2. Logic Symbol


MC74VHC1G08



DF SUFFIX  
5-LEAD SOT-353 PACKAGE  
SC-88A  
CASE 419A-01

FUNCTION TABLE

| Inputs |   | Output |
|--------|---|--------|
| A      | B | Y      |
| L      | L | L      |
| L      | H | L      |
| H      | L | L      |
| H      | H | H      |



Pin 1  
d = Date Code

Marking Diagram

DEVICE ORDERING INFORMATION

| Device Order Number | Device Nomenclature        |                       |            |                 |                |                      | Package Type | Tape and Reel Size |
|---------------------|----------------------------|-----------------------|------------|-----------------|----------------|----------------------|--------------|--------------------|
|                     | Motorola Circuit Indicator | Temp Range Identifier | Technology | Device Function | Package Suffix | Tape and Reel Suffix |              |                    |
| MC74VHC1G08DFT1     | MC                         | 74                    | VHC1G      | 08              | DF             | T1                   | SC-88A       | 7-Inch/3000 Unit   |

This document contains information on a product under development. Motorola reserves the right to change or discontinue this product without notice.

**MAXIMUM RATINGS\***

| Characteristics                                                  | Symbol    | Value                                 | Unit |
|------------------------------------------------------------------|-----------|---------------------------------------|------|
| DC Supply Voltage                                                | $V_{CC}$  | -0.5 to +7.0                          | V    |
| DC Input Voltage                                                 | $V_{IN}$  | -0.5 to +7.0                          | V    |
| DC Output Voltage<br>$V_{CC} = 0$<br>High or Low State           | $V_{OUT}$ | -0.5 to 7.0<br>-0.5 to $V_{CC} + 0.5$ | V    |
| Input Diode Current                                              | $I_{IK}$  | -20                                   | mA   |
| Output Diode Current<br>( $V_{OUT} < GND$ ; $V_{OUT} > V_{CC}$ ) | $I_{OK}$  | +20                                   | mA   |
| DC Output Current, per Pin                                       | $I_{OUT}$ | +25                                   | mA   |
| DC Supply Current, $V_{CC}$ and GND                              | $I_{CC}$  | +50                                   | mA   |
| Power dissipation in still air, SC-88A †                         | $P_D$     | 200                                   | mW   |
| Lead temperature, 1 mm from case for 10 s                        | $T_L$     | 260                                   | °C   |
| Storage temperature                                              | $T_{stg}$ | -65 to +150                           | °C   |

\* Maximum Ratings are those values beyond which damage to the device may occur. Exposure to these conditions or conditions beyond those indicated may adversely affect device reliability. Functional operation under absolute-maximum-rated conditions is not implied. Functional operation should be restricted to the Recommended Operating Conditions.

† Derating — SC-88A Package: -3 mW/°C from 65° to 125°C

**RECOMMENDED OPERATING CONDITIONS**

| Characteristics                                                                  | Symbol     | Min    | Max       | Unit |
|----------------------------------------------------------------------------------|------------|--------|-----------|------|
| DC Supply Voltage                                                                | $V_{CC}$   | 2.0    | 5.5       | V    |
| DC Input Voltage                                                                 | $V_{IN}$   | 0.0    | 5.5       | V    |
| DC Output Voltage                                                                | $V_{OUT}$  | 0.0    | $V_{CC}$  | V    |
| Operating Temperature Range                                                      | $T_A$      | -55    | +125      | °C   |
| Input Rise and Fall Time<br>$V_{CC} = 3.3V \pm 0.3V$<br>$V_{CC} = 5.0V \pm 0.5V$ | $t_r, t_f$ | 0<br>0 | 100<br>20 | ns/V |

## DC ELECTRICAL CHARACTERISTICS

| Symbol          | Parameter                                                                                 | Test Conditions                                                                                          | V <sub>CC</sub><br>(V)   | T <sub>A</sub> = 25°C      |                   |                            | T <sub>A</sub> ≤ 85°C      |                            | T <sub>A</sub> ≤ 125°C     |                            | Unit |
|-----------------|-------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|--------------------------|----------------------------|-------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|------|
|                 |                                                                                           |                                                                                                          |                          | Min                        | Typ               | Max                        | Min                        | Max                        | Min                        | Max                        |      |
| V <sub>IH</sub> | Minimum High-Level Input Voltage                                                          |                                                                                                          | 2.0<br>3.0<br>4.5<br>5.5 | 1.5<br>2.1<br>3.15<br>3.85 |                   |                            | 1.5<br>2.1<br>3.15<br>3.85 |                            | 1.5<br>2.1<br>3.15<br>3.85 |                            | V    |
| V <sub>IL</sub> | Maximum Low-Level Input Voltage                                                           |                                                                                                          | 2.0<br>3.0<br>4.5<br>5.5 |                            |                   | 0.5<br>0.9<br>1.35<br>1.65 |                            | 0.5<br>0.9<br>1.35<br>1.65 |                            | 0.5<br>0.9<br>1.35<br>1.65 | V    |
| V <sub>OH</sub> | Minimum High-Level Output Voltage<br>V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub> | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub><br>I <sub>OH</sub> = -50μA                          | 2.0<br>3.0<br>4.5        | 1.9<br>2.9<br>4.4          | 2.0<br>3.0<br>4.5 |                            | 1.9<br>2.9<br>4.4          |                            | 1.9<br>2.9<br>4.4          |                            | V    |
|                 |                                                                                           | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub><br>I <sub>OH</sub> = -4mA<br>I <sub>OH</sub> = -8mA | 3.0<br>4.5               | 2.58<br>3.94               |                   |                            | 2.48<br>3.80               |                            | 2.34<br>3.66               |                            | V    |
| V <sub>OL</sub> | Maximum Low-Level Output Voltage<br>V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>  | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub><br>I <sub>OL</sub> = 50μA                           | 2.0<br>3.0<br>4.5        |                            | 0.0<br>0.0<br>0.0 | 0.1<br>0.1<br>0.1          |                            | 0.1<br>0.1<br>0.1          |                            | 0.1<br>0.1<br>0.1          | V    |
|                 |                                                                                           | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub><br>I <sub>OL</sub> = 4mA<br>I <sub>OL</sub> = 8mA   | 3.0<br>4.5               |                            |                   | 0.36<br>0.36               |                            | 0.44<br>0.44               |                            | 0.52<br>0.52               | V    |
| I <sub>IN</sub> | Maximum Input Leakage Current                                                             | V <sub>IN</sub> = 5.5V or GND                                                                            | 0 to 5.5                 |                            |                   | ±0.1                       |                            | ±1.0                       |                            | ±1.0                       | μA   |
| I <sub>CC</sub> | Maximum Quiescent Supply Current                                                          | V <sub>IN</sub> = V <sub>CC</sub> or GND                                                                 | 5.5                      |                            |                   | 2.0                        |                            | 20                         |                            | 40                         | μA   |

AC ELECTRICAL CHARACTERISTICS (C<sub>load</sub> = 50 pF, Input t<sub>r</sub> = t<sub>f</sub> = 3.0ns)

| Symbol                                 | Parameter                                       | Test Conditions                                                                  | T <sub>A</sub> = 25°C |            |             | T <sub>A</sub> ≤ 85°C |              | T <sub>A</sub> ≤ 125°C |              | Unit |
|----------------------------------------|-------------------------------------------------|----------------------------------------------------------------------------------|-----------------------|------------|-------------|-----------------------|--------------|------------------------|--------------|------|
|                                        |                                                 |                                                                                  | Min                   | Typ        | Max         | Min                   | Max          | Min                    | Max          |      |
| t <sub>PLH</sub> ,<br>t <sub>PHL</sub> | Maximum Propagation Delay,<br>Input A or B to Y | V <sub>CC</sub> = 3.0 ± 0.3V    C <sub>L</sub> = 15 pF<br>C <sub>L</sub> = 50 pF |                       | 6.2<br>8.7 | 8.8<br>12.3 |                       | 10.5<br>14.0 |                        | 12.5<br>16.5 | ns   |
|                                        |                                                 | V <sub>CC</sub> = 5.0 ± 0.5V    C <sub>L</sub> = 15 pF<br>C <sub>L</sub> = 50 pF |                       | 4.3<br>5.8 | 5.9<br>7.9  |                       | 7.0<br>9.0   |                        | 9.0<br>11.0  |      |
| C <sub>IN</sub>                        | Maximum Input Capacitance                       |                                                                                  |                       | 4          | 10          |                       | 10           |                        | 10           | pF   |

|                 |                                         |                                        |    |
|-----------------|-----------------------------------------|----------------------------------------|----|
| C <sub>PD</sub> | Power Dissipation Capacitance (Note 1.) | Typical @ 25°C, V <sub>CC</sub> = 5.0V | pF |
|                 |                                         | 18                                     |    |

1. C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation: I<sub>CC(OPR)</sub> = C<sub>PD</sub> • V<sub>CC</sub> • f<sub>in</sub> + I<sub>CC</sub>. C<sub>PD</sub> is used to determine the no-load dynamic power consumption; P<sub>D</sub> = C<sub>PD</sub> • V<sub>CC</sub><sup>2</sup> • f<sub>in</sub> + I<sub>CC</sub> • V<sub>CC</sub>.


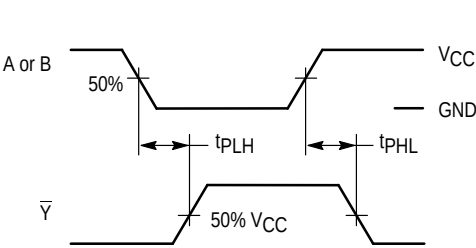


Figure 3. Switching Waveforms

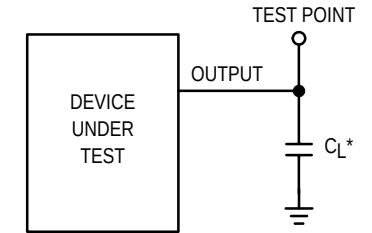


\* Includes all probe and jig capacitance

Figure 4. Test Circuit

OUTLINE DIMENSIONS


DF SUFFIX  
5-LEAD SOT-353 PACKAGE  
SC-88A  
CASE 419A-01  
ISSUE B

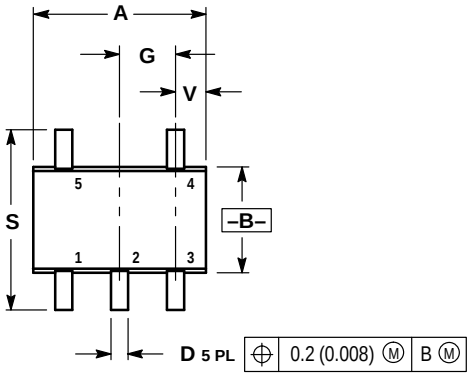

- NOTES:
- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  - 2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES    |       | MILLIMETERS |      |
|-----|-----------|-------|-------------|------|
|     | MIN       | MAX   | MIN         | MAX  |
| A   | 0.071     | 0.087 | 1.80        | 2.20 |
| B   | 0.045     | 0.053 | 1.15        | 1.35 |
| C   | 0.031     | 0.043 | 0.80        | 1.10 |
| D   | 0.004     | 0.012 | 0.10        | 0.30 |
| G   | 0.026 BSC |       | 0.65 BSC    |      |
| H   | —         | 0.004 | —           | 0.10 |
| J   | 0.004     | 0.010 | 0.10        | 0.25 |
| K   | 0.004     | 0.012 | 0.10        | 0.30 |
| N   | 0.008 REF |       | 0.20 REF    |      |
| S   | 0.079     | 0.087 | 2.00        | 2.20 |
| V   | 0.012     | 0.016 | 0.30        | 0.40 |

SOT-353

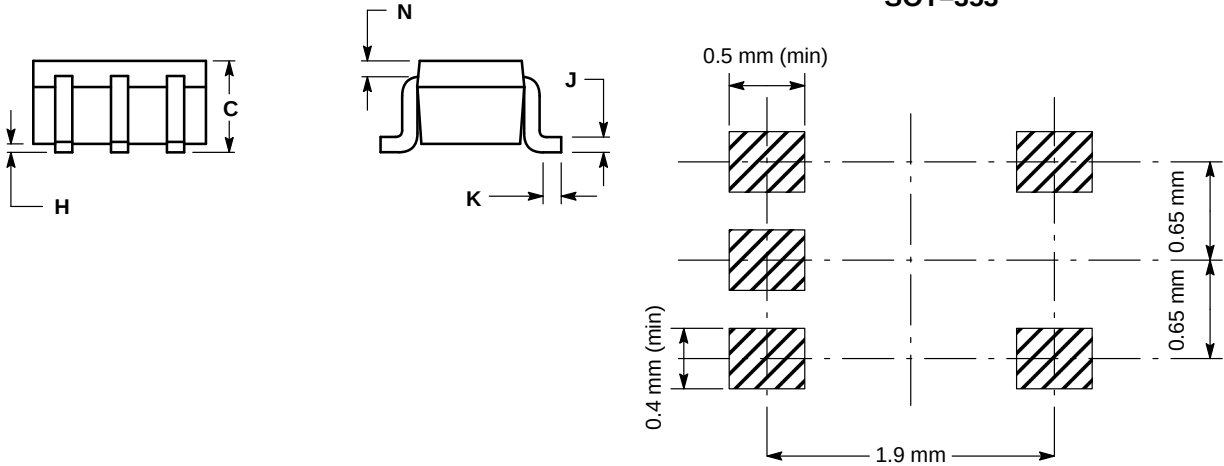

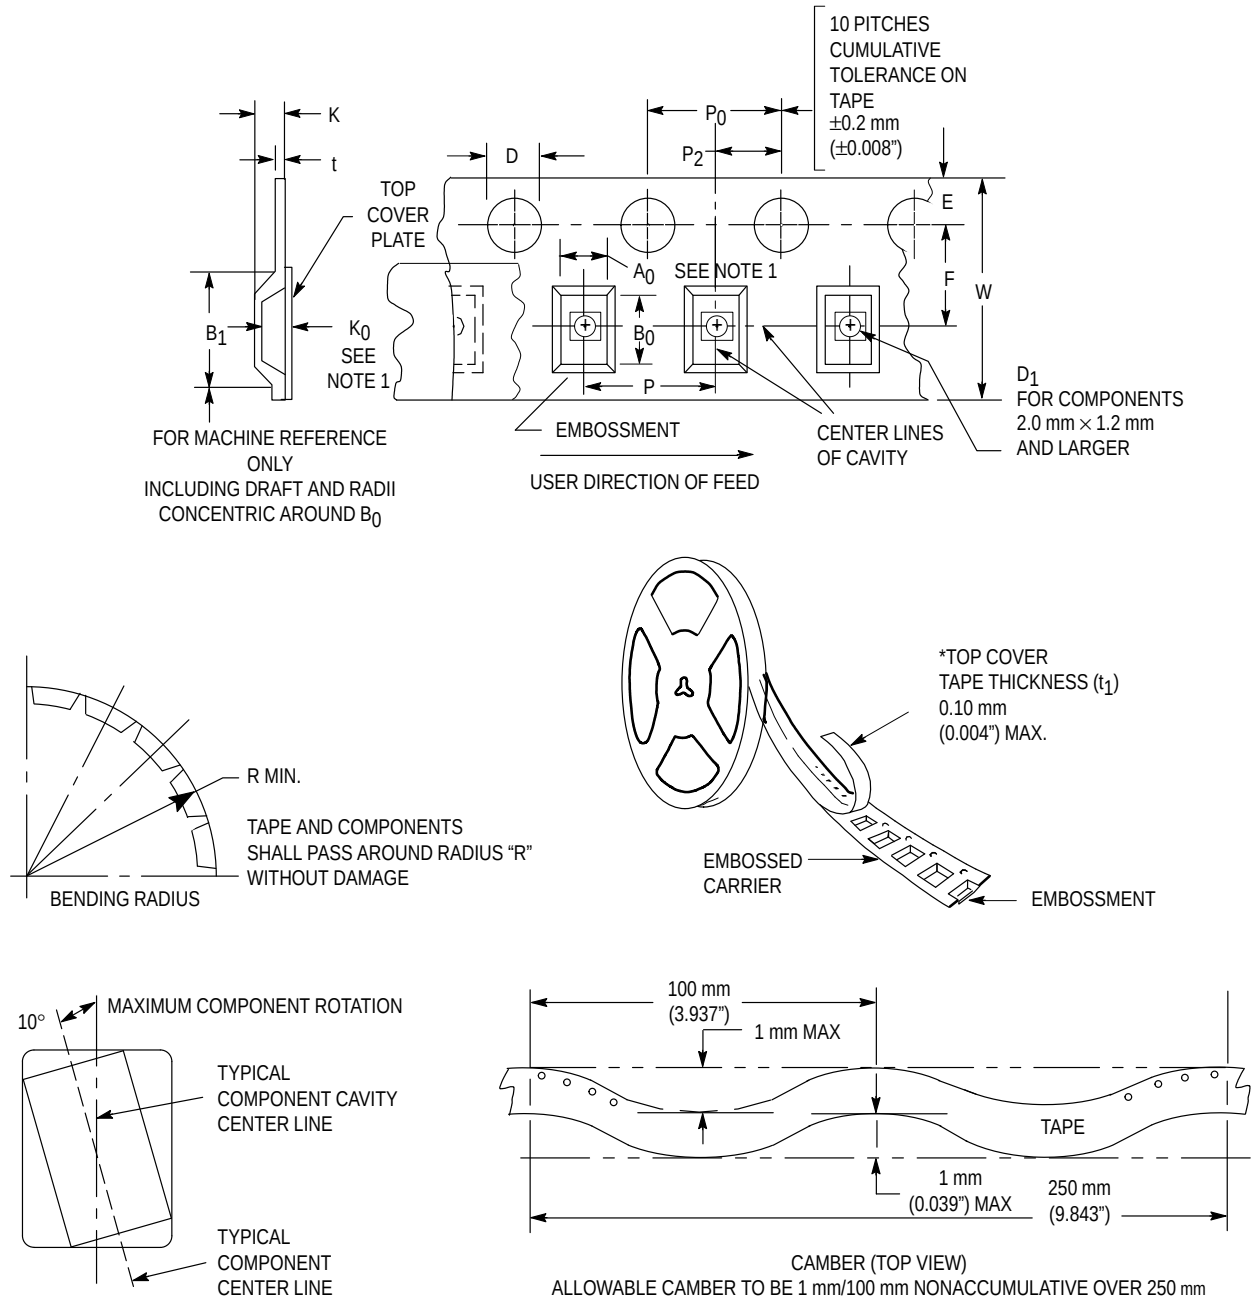


Figure 5. Carrier Tape Specifications

**EMBOSSED CARRIER DIMENSIONS** (See Notes 1 and 2)

| Tape Size | $B_1$ Max        | D                                     | $D_1$               | E                                       | F                                     | K               | P                                       | $P_0$                                  | $P_2$                                  | R             | T                                         | W                                      |
|-----------|------------------|---------------------------------------|---------------------|-----------------------------------------|---------------------------------------|-----------------|-----------------------------------------|----------------------------------------|----------------------------------------|---------------|-------------------------------------------|----------------------------------------|
| 8 mm      | 4.55 mm (0.179") | 1.5 +0.1/-0.0 mm (0.059 +0.004/-0.0") | 1.0 mm Min (0.039") | 1.75 $\pm 0.1$ mm (0.069 $\pm 0.004$ ") | 3.5 $\pm 0.5$ mm (1.38 $\pm 0.002$ ") | 2.4 mm (0.094") | 4.0 $\pm 0.10$ mm (0.157 $\pm 0.004$ ") | 4.0 $\pm 0.1$ mm (0.156 $\pm 0.004$ ") | 2.0 $\pm 0.1$ mm (0.079 $\pm 0.002$ ") | 25 mm (0.98") | 0.3 $\pm 0.05$ mm (0.01 +0.0038/-0.0002") | 8.0 $\pm 0.3$ mm (0.315 $\pm 0.012$ ") |

1. Metric Dimensions Govern—English are in parentheses for reference only.

2.  $A_0$ ,  $B_0$ , and  $K_0$  are determined by component size. The clearance between the components and the cavity must be within 0.05 mm min to 0.50 mm max. The component cannot rotate more than 10° within the determined cavity

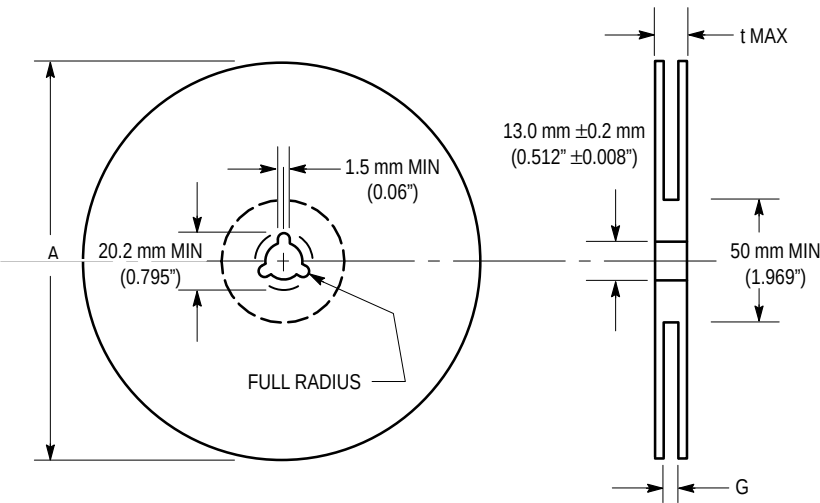


Figure 6. Reel Dimensions

REEL DIMENSIONS

| Tape Size | A Max          | G                                               | t Max           |
|-----------|----------------|-------------------------------------------------|-----------------|
| 8 mm      | 330 mm (14.1") | 8,400 mm, +1.5 mm, -0.0 (0.33", +0.059", -0.00) | 14.4 mm (0.56") |

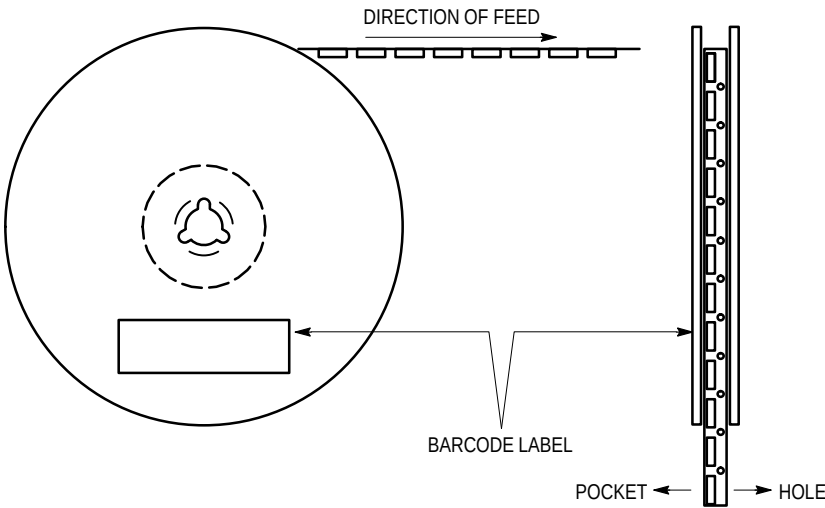
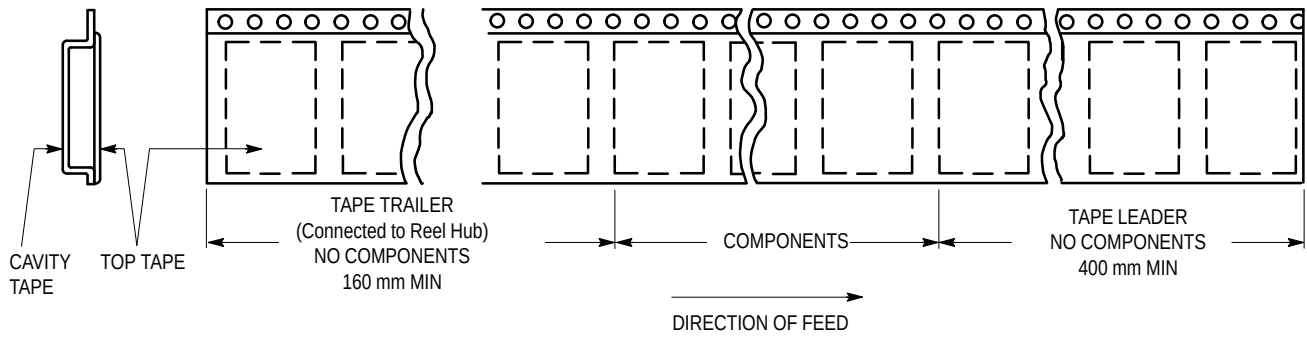
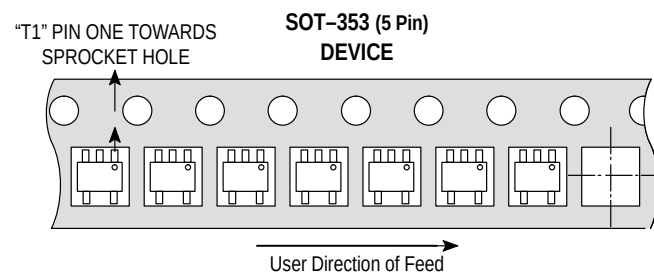


Figure 7. Reel Winding Direction



**Figure 8. Tape Ends for Finished Goods**



**Figure 9. Reel Configuration**

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

#### How to reach us:

**USA/EUROPE/Locations Not Listed:** Motorola Literature Distribution;  
P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

**JAPAN:** Nippon Motorola Ltd.; SPD, Strategic Planning Office, 141,  
4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan. 81-3-5487-8488

**Customer Focus Center: 1-800-521-6274**

**Mfax™:** RMFAX0@email.sps.mot.com – TOUCHTONE 1-602-244-6609  
Motorola Fax Back System – US & Canada ONLY 1-800-774-1848  
– <http://sps.motorola.com/mfax/>

**ASIA/PACIFIC:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,  
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

**HOME PAGE:** <http://motorola.com/sps/>



**MOTOROLA**

