


High-Voltage Trench MOS Barrier Schottky Rectifier

Ultra Low $V_F = 0.385\text{ V}$ at $I_F = 5\text{ A}$

Major Ratings and Characteristics

$I_{F(AV)}$	30 A
V_{RRM}	100 V
I_{FSM}	250 A
V_F at $I_F = 30\text{ A}$	0.69 V
T_J max.	150 °C

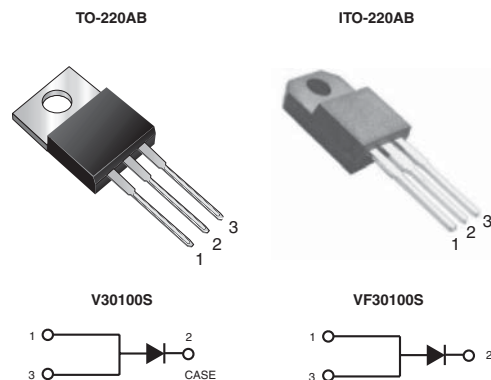

Features

- Trench MOS Schottky Technology
- Low forward voltage drop, low power losses
- High efficiency operation
- Low thermal resistance
- Solder Dip 260 °C, 40 seconds



Mechanical Data

Case: TO-220AB, ITO-220AB

Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade

Polarity: As marked

Typical Applications

For use in high frequency inverters, switching power supplies, freewheeling diodes, oring diode, dc-to-dc converters and reverse battery protection.

Maximum Ratings

($T_A = 25\text{ °C}$ unless otherwise specified)

Parameter	Symbol	V30100S	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	100	V
RMS reverse voltage for sine wave	V_{RMS}	70	V
DC blocking voltage	V_R	100	V
Maximum average forward rectified (see Fig. 1)	$I_{F(AV)}$	30	A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	250	A
Peak repetitive reverse current per leg at $t_p = 2\text{ }\mu\text{s}$, 1 kHz	I_{RRM}	1.0	A
Voltage rate of change (rated V_R)	dv/dt	10000	V/ μs
Isolation voltage (ITO-220AC only) From terminal to heatsink $t = 1\text{ minute}$	V_{AC}	1500	V
Operating junction and storage temperature range	T_J, T_{STG}	- 20 to + 150	°C

Electrical Characteristics

($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

Parameter	Test condition		Symbol	Typ.	Max.	Unit
Instantaneous forward voltage ⁽¹⁾	at I _F = 5 A I _F = 10 A I _F = 20 A I _F = 30 A	T _J = 25 °C	V _F	0.463	-	V
				0.535	-	
				0.664	-	
				0.773	0.85	
	at I _F = 5 A I _F = 10 A I _F = 20 A I _F = 30 A	T _J = 125 °C		0.385	-	
				0.455	-	
				0.601	-	
				0.685	0.75	
Reverse current at rated V _R ⁽¹⁾	at V _R = 70 V	T _J = 25 °C	I _R	13.9	500	μA
		T _J = 125 °C		8.5	15	mA
	at V _R = 100 V	T _J = 25 °C		69.9	1000	μA
		T _J = 125 °C		22.5	45	mA

Thermal Characteristics

($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	V30100S	VF30100S	Unit
Typical thermal resistance	$R_{\theta JC}$	2.0	4.0	$^{\circ}\text{C/W}$

Notes:

(1) Pulse test: 300 μs pulse width, 1 % duty cycle

Ratings and Characteristics Curves

($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted)

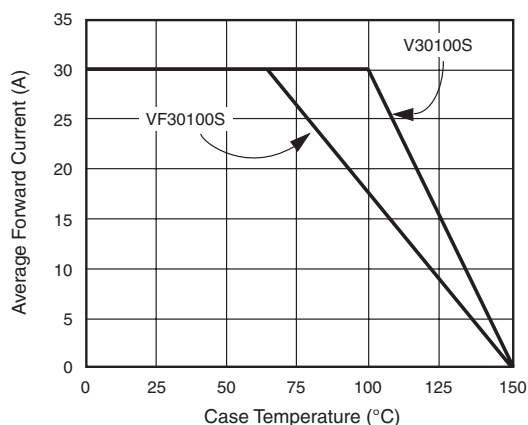


Figure 1. Forward Current Derating Curve

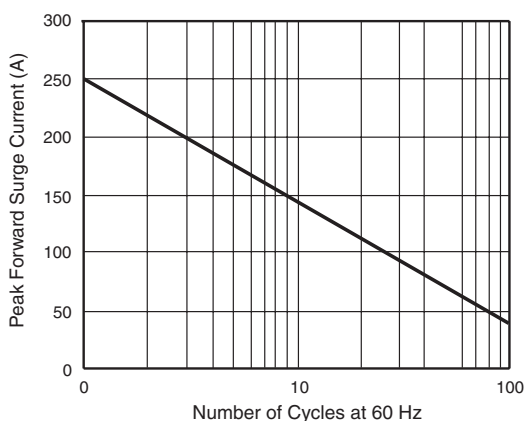


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

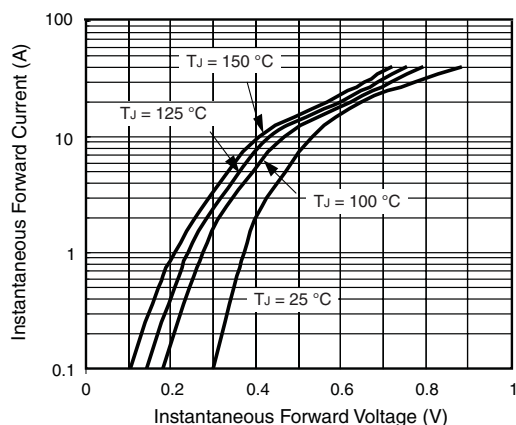


Figure 3. Typical Instantaneous Forward Characteristics Per Leg

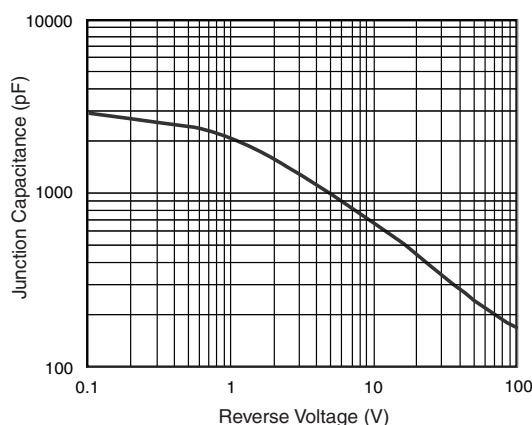


Figure 5. Typical Junction Capacitance

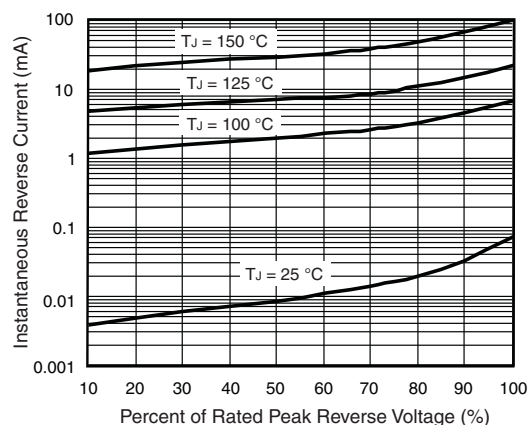


Figure 4. Typical Reverse Characteristics



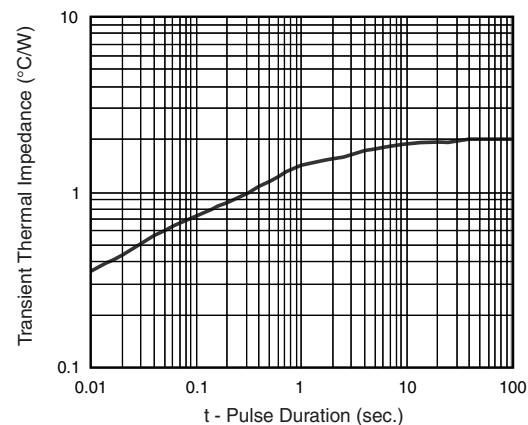


Figure 6. Typical Transient Thermal Impedance

Package outline dimensions in inches (millimeters)

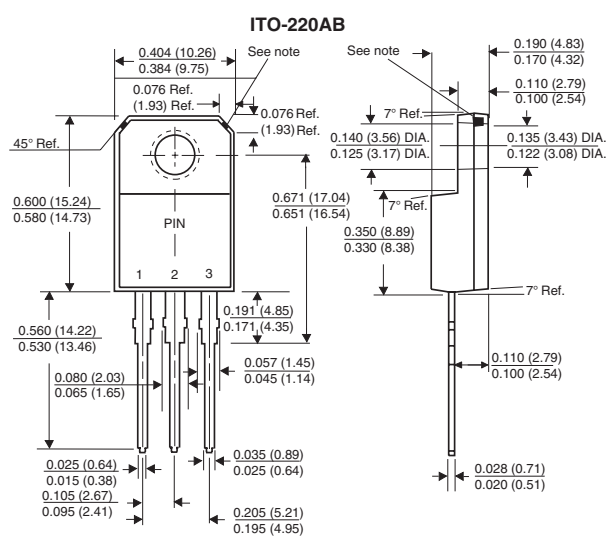

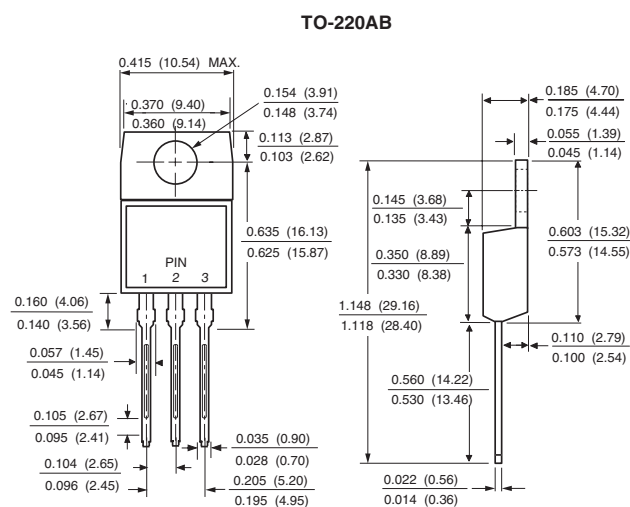

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.