


REVISIONS			
LTR		DATE	APPROVED
A	INITIAL RELEASE	5/5/03	

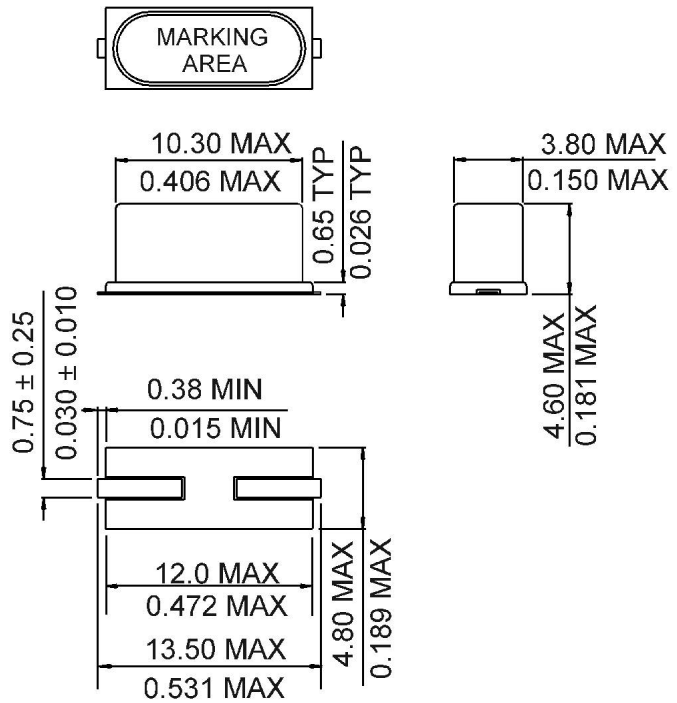

**SPECIFICATIONS:**

NOMINAL FREQUENCY:	12.288 MHz
MODE OF OSCILLATION:	FUNDAMENTAL
FREQUENCY TOLERANCE AT 25°C:	±30 PPM MAX
FREQUENCY STABILITY OVER TEMPERATURE RANGE:	±50 PPM MAX
OPERATING TEMPERATURE RANGE:	-20°C TO +70°C
STORAGE TEMPERATURE RANGE:	-55°C TO +125°C
AGING:	±5 PPM PER YEAR MAX
LOAD CAPACITANCE:	20 pF
DRIVE LEVEL:	100 µW TYP, 1000 µW MAX
SHUNT CAPACITANCE:	7 pF MAX
EQUIVALENT SERIES RESISTANCE:	60 OHMS MAX
HOLDER TYPE:	HC-49/S SMD AS SHOWN

**RALTRON**

10651 NW 19TH STREET  
MIAMI, FL 33172

ALL DIMENSIONS ARE IN mm/inch  
UNLESS OTHERWISE SPECIFIED

DRAWN BY:	Part Generator
CHECKED BY:	
APPROVED BY:	
SCALE:	SHEET 1 OF DATE:

CAGE CODE:  
**Ø VUE Ø**

DRAWING TITLE:	
<b>LOW PROFILE MICROPROCESSOR CRYSTAL</b>	
DRAWING NUMBER:	
<b>AS-12.288-20-SMD</b>	