



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>



NTE30103 LED – Dual Color 3mm Super Fresh Red/Super Blue

Features:

- RoHS Compliant
- Water Clear



Absolute Maximum Ratings: ($T_A = +25^{\circ}\text{C}$ unless otherwise specified)

Power Dissipation, P_d		
Super Fresh Red	100mW	
Super Blue	120mW	
Continuous Forward Current, I_F	25mA	
Peak Forward Current (1/10 Duty Ratio, 0.1ms Pulse Width), I_{FM}		
Super Fresh Red	50mA	
Super Blue	100mA	
Reverse Voltage, V_R		
Super Fresh Red	5V	
Super Blue	4V	
LED Junction Temperature, T_j	+100°C	
Operating Temperature Range, T_{opr}	-25°C to +85°C	
Storage Temperature Range, T_{stg}	-40°C to +100°C	
DIP Soldering Temperature (During Soldering, 3mm from body, 5sec max), T_L	+260°C	

Electro-Optical Characteristics: ($T_A = +25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
View Angle of Half Power	$2\theta_{1/2}$	$I_F = 20\text{mA}$	-	30	-	deg
Forward Voltage	VF	$I_F = 20\text{mA}$	-	2.00	2.50	V
Super Fresh Red				3.50	4.20	V
Reverse Current	IR	$V_R = 5\text{V}$	-	-	10	μA
Super Fresh Red				-	60	μA
Luminous Intensity (Note 1)	IV	$I_F = 20\text{mA}$	400	1000	-	mcd
Super Fresh Red				300	600	-
Peak Emission Wavelength	λ_p	$I_F = 20\text{mA}$	-	635	-	nm
Super Fresh Red				468	-	nm
Dominant Wave Length (Note 2)	$\lambda_d(\text{HUE})$	$I_F = 20\text{mA}$	-	626	-	nm
Super Fresh Red				470	-	nm

Note 1. Luminous intensity is measured with an Exeltron 2001, Tolerance = 30%.
 Note 2. The dominant wavelength, λ_d , is derived from the CIE Chromaticity Diagram and represents the color of the device.

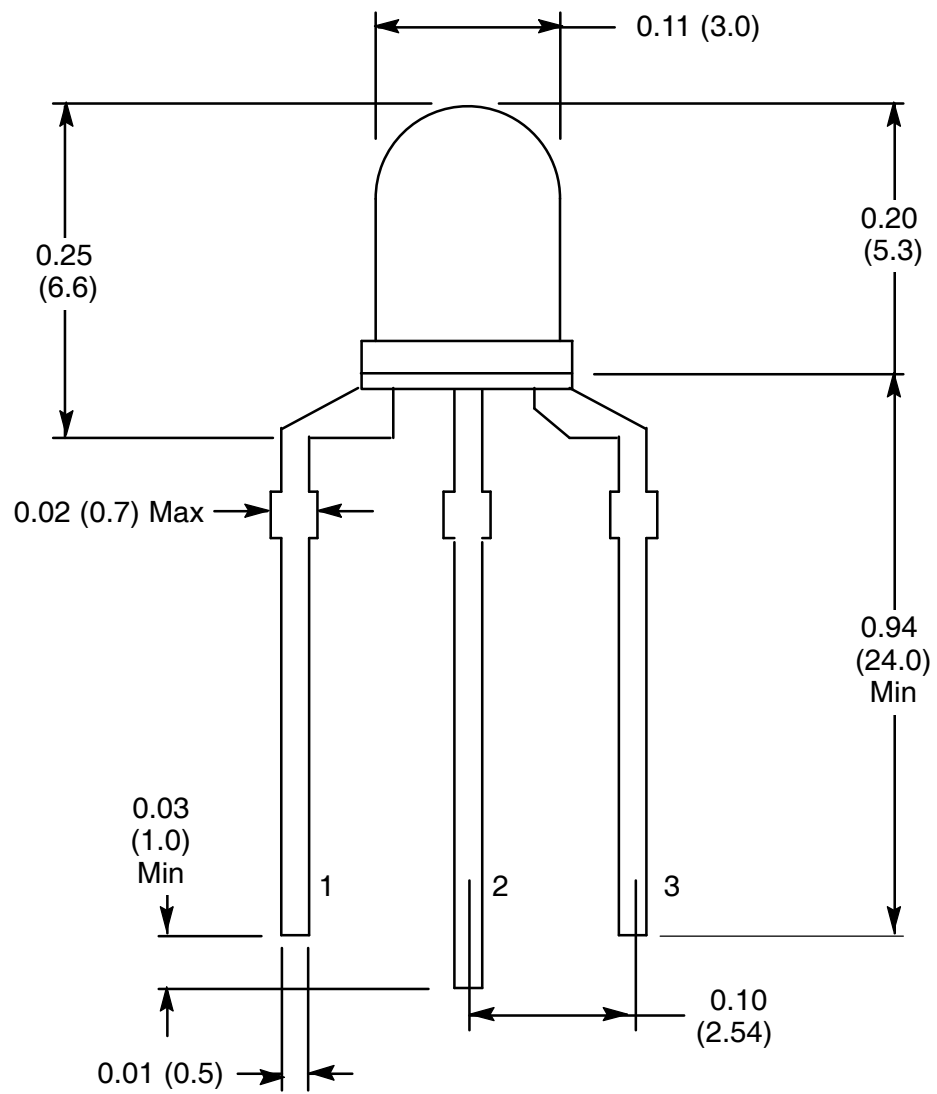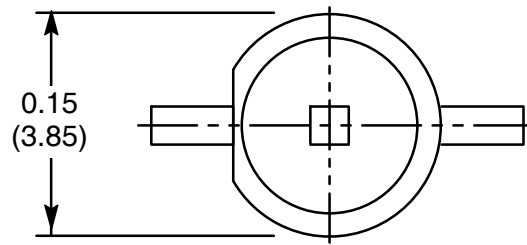

- 1. Red (Yellow) +
- 2. Common Lead -
- 3. Blue +