


CMMR1 SERIES
SURFACE MOUNT
GENERAL PURPOSE
SILICON RECTIFIER
1.0 AMP, 200 THRU 1000 VOLTS

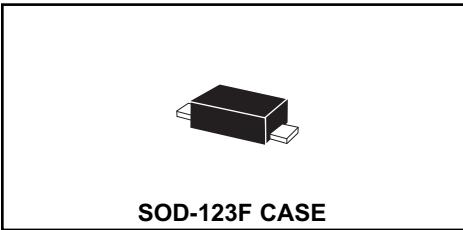

CentralTM
Semiconductor Corp.

DESCRIPTION:

The Central Semiconductor CMMR1 Series of High Current Density Rectifiers, in a SOD-123F surface mount package are designed for all types of commercial, industrial computer and automotive applications.

MARKING CODES:

CMMR1-02:	C02F
CMMR1-04:	C04F
CMMR1-06:	C06F
CMMR1-10:	C10F


MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

	SYMBOL	CMMR1	CMMR1	CMMR1	CMMR1	UNITS
		-02	-04	-06	-10	
Peak Repetitive Reverse Voltage	V_{RRM}	200	400	600	1000	V
DC Blocking Voltage	V_R	200	400	600	1000	V
RMS Reverse Voltage	$V_R(\text{RMS})$	140	280	420	700	V
Average Forward Current ($T_L=75^\circ\text{C}$)	I_O			1.0		A
Peak Forward Surge Current (8.3ms)	I_{FSM}			30		A
Operating and Storage						
Junction Temperature	T_J, T_{stg}			-65 to +150		$^\circ\text{C}$
Typical Thermal resistance	Θ_{JA}			65		$^\circ\text{C}/\text{W}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
V_F	$I_F=1.0\text{A}$			1.1	V
I_R	$V_R=\text{Rated } V_{RRM}$			10	μA
I_R	$V_R=\text{Rated } V_{RRM}, T_A=125^\circ\text{C}$			50	μA
C_J	$V_R=4.0\text{V}, f=1.0\text{MHz}$		4.0		pF

SOD-123F CASE - MECHANICAL OUTLINE

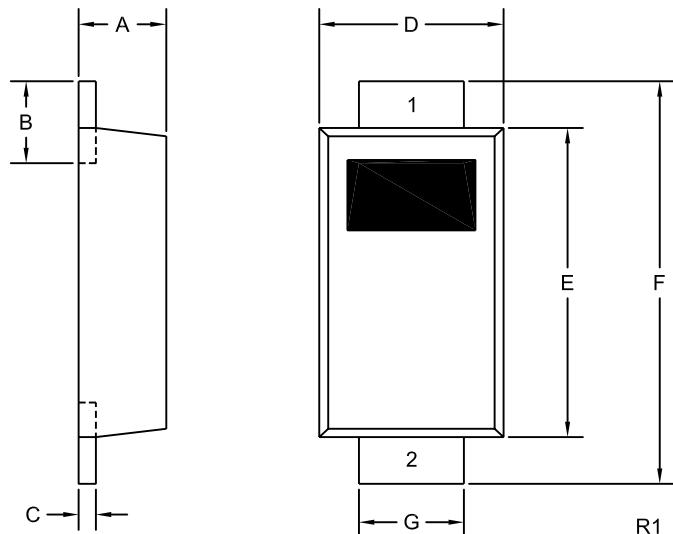

SYMBOL	DIMENSIONS		INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX	MIN	MAX
A	0.035	0.043	0.88	1.08		
B	0.020	0.031	0.50	0.80		
C	0.004	0.008	0.10	0.20		
D	0.065	0.077	1.65	1.95		
E	0.104	0.116	2.65	2.95		
F	0.140	0.156	3.55	3.95		
G	0.030	0.041	0.75	1.05		

SOD-123F (REV:R1)

MARKING CODE

DEVICE	MARKING CODE
CMMR1-02	C02F
CMMR1-04	C04F
CMMR1-06	C06F
CMMR1-10	C10F

LEAD CODE:

- 1) CATHODE
- 2) ANODE