


1A 600V 120ns

OUTLINE DRAWING

FRD Type :10ERB60

FEATURES

- * Miniature Size
- * Fast Recovery and Low Price
- * High Surge Capability
- * 100volts trough 600volts Types Available
- * 26mm and 52mm Inside Tape Spacing



Maximum Ratings

Approx Net Weight:0.17g

Rating	Symbol	10ERB60		Unit
Repetitive Peak Reverse Voltage	V_{RRM}	600		V
Average Rectified Output Current	I_O	1.0	Ta=37°C *1	Half Sine Wave Resistive Load
		0.8	Ta=29°C *2	
RMS Forward Current	$I_{F(RMS)}$	1.57		A
Surge Forward Current	I_{FSM}	35	Half Sine Wave,1cycle,Non-repetitive	A
Operating JunctionTemperature Range	T_{jw}	- 40 to + 150		°C
Storage Temperature Range	T_{stg}	- 40 to + 150		°C


Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min	Typ	Max	Unit
Peak Reverse Current	I_{RM}	Tj= 25°C, $V_{RM}= V_{RRM}$	-	-	10	μA
Peak Forward Voltage	V_{FM}	Tj= 25°C, $I_{FM}= 1 A$	-	-	1.13	V
Reverse Recovery Time	trr	$I_{FM}= 1 A$, $-di/dt= 50 A/\mu s$, Ta= 25°C	-	-	120	ns
Thermal Resistance	Rth(j-a)	Junction to Ambient	-	-	100	°C/W
		*1 P.C. Board mounted			140	
		*2 Without Fin or P.C. Board mounted				



*1: P.C. Board mounted (L=3mm, Print Lands = 7x7 mm,Both Sides)

*2: Without Fin or P.C.Board mounted


10ERB_ OUTLINE DRAWING (Dimensions in mm)

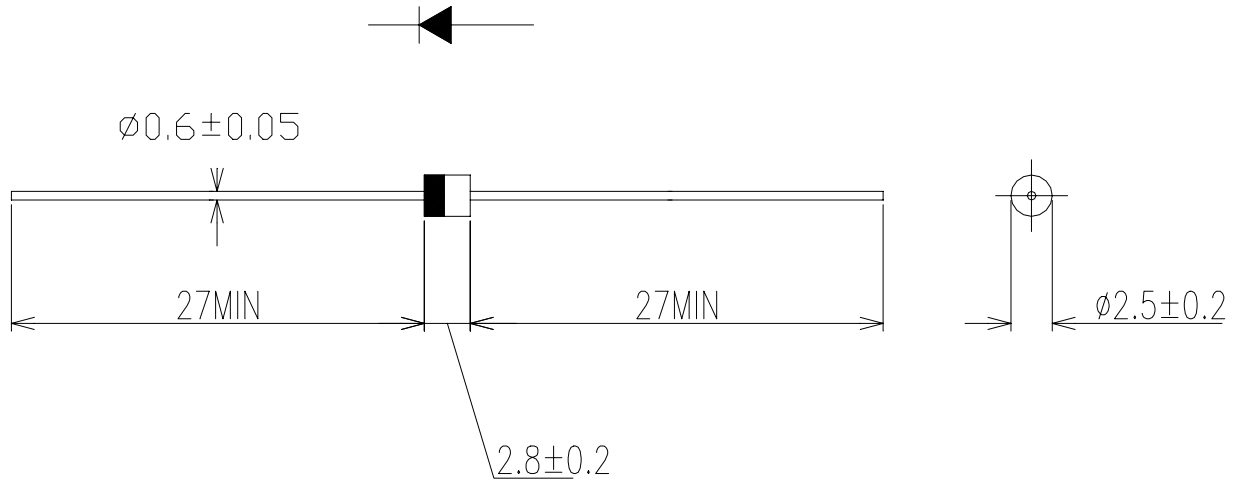


FORWARD CURRENT VS. VOLTAGE

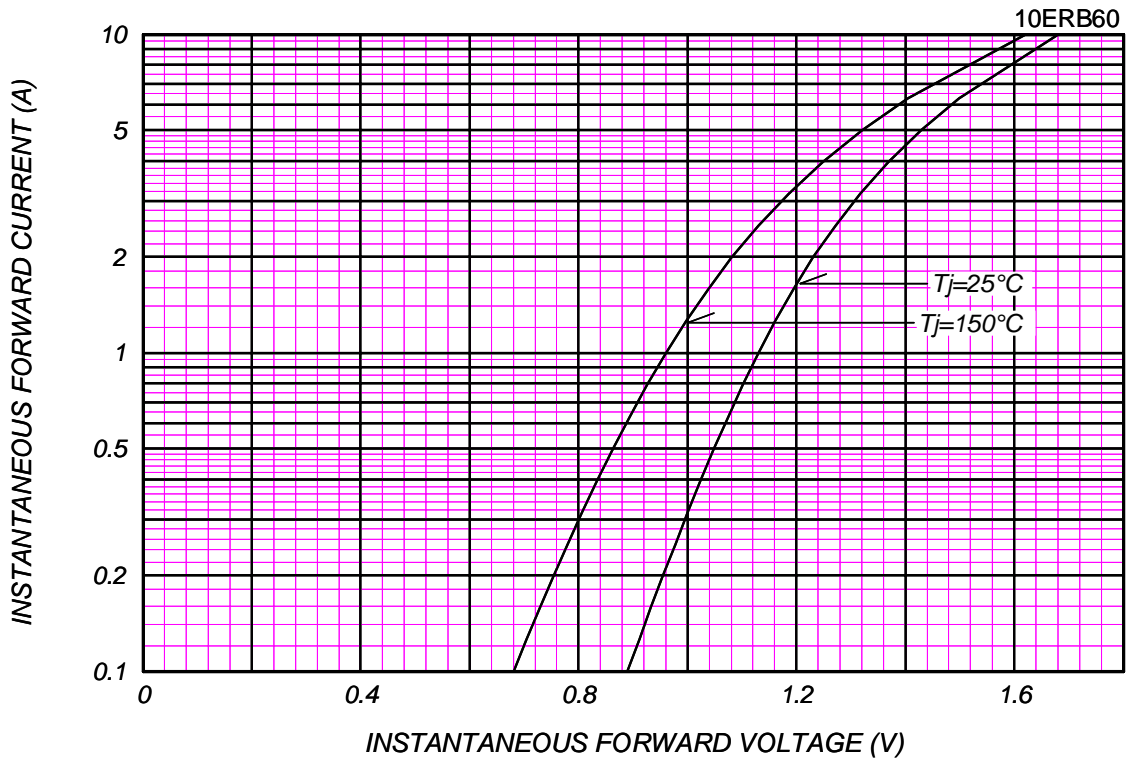



AVERAGE FORWARD POWER DISSIPATION

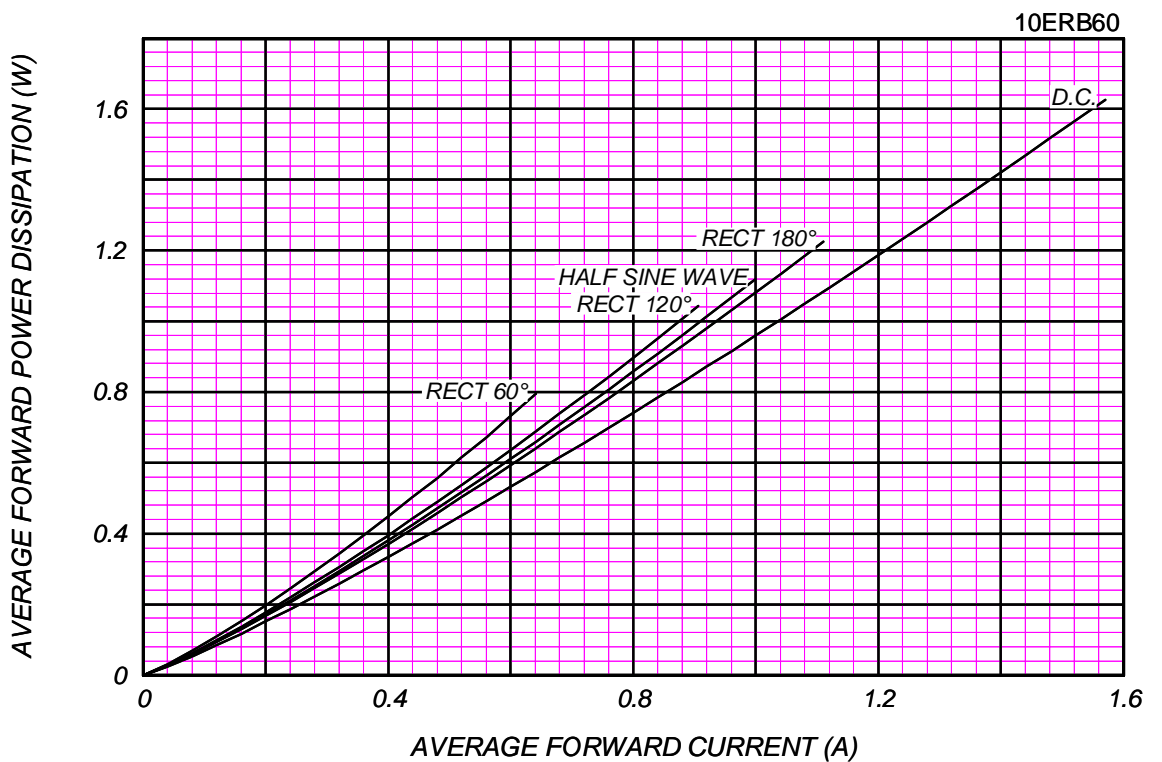




AVERAGE FORWARD CURRENT VS. AMBIENT TEMPERATURE

P.C. Board mounted (L=3mm,Print Land=7x7mm,Both Sides)

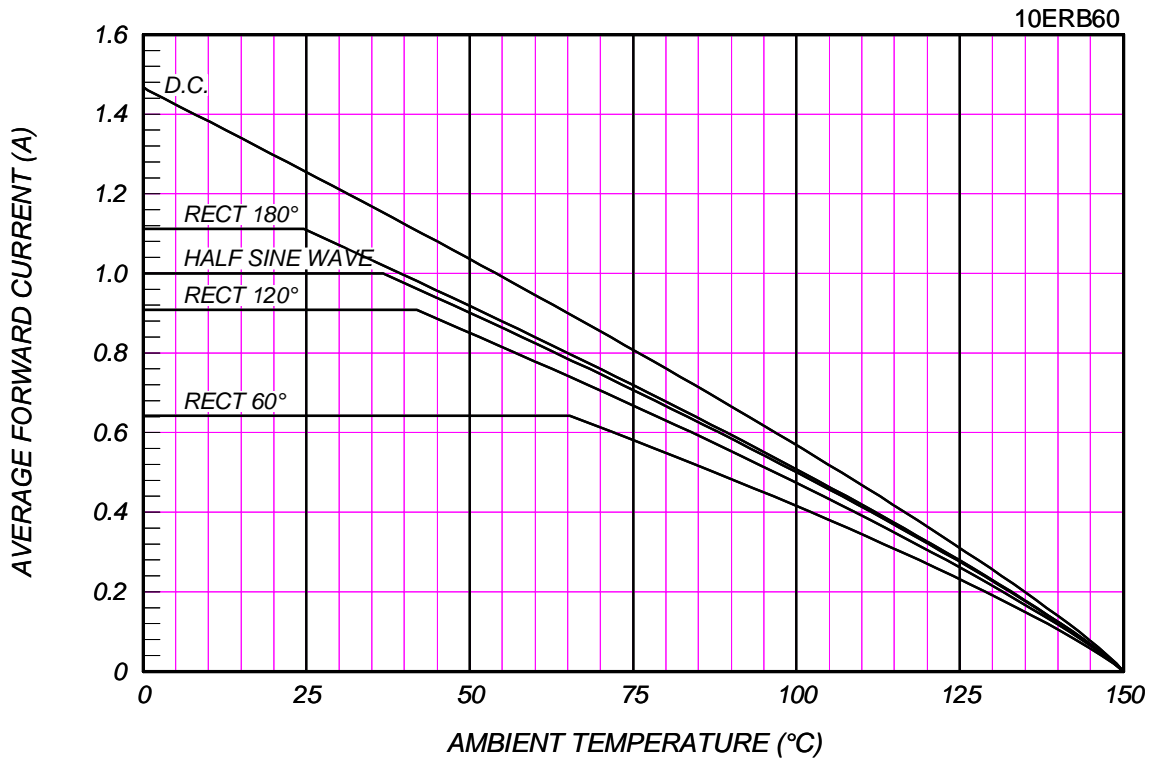

AVERAGE FORWARD CURRENT VS. AMBIENT TEMPERATURE

Without Fin or P.C. Board

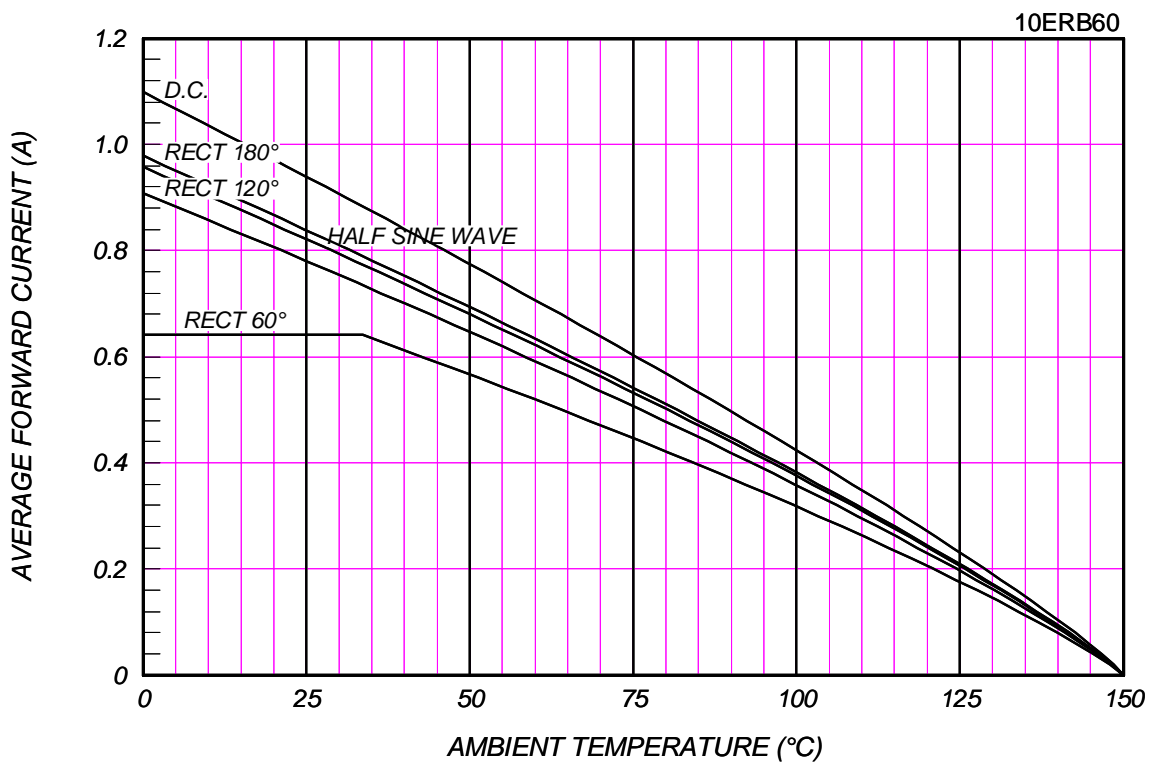

SURGE CURRENT RATINGS

f=50Hz, Half Sine Wave, Non-Repetitive, No Load

10ERB60

