



**TECHNICAL DATA
DATA SHEET**

72CPQ030 SCHOTTKY RECTIFIER


Applications:

- Switching power supply • Converters • Free-Wheeling diodes • Reverse battery protection

Features:

- 150°C T_J operation
- Center tap TO-247 package
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

Mechanical Dimensions: In Inches / mm

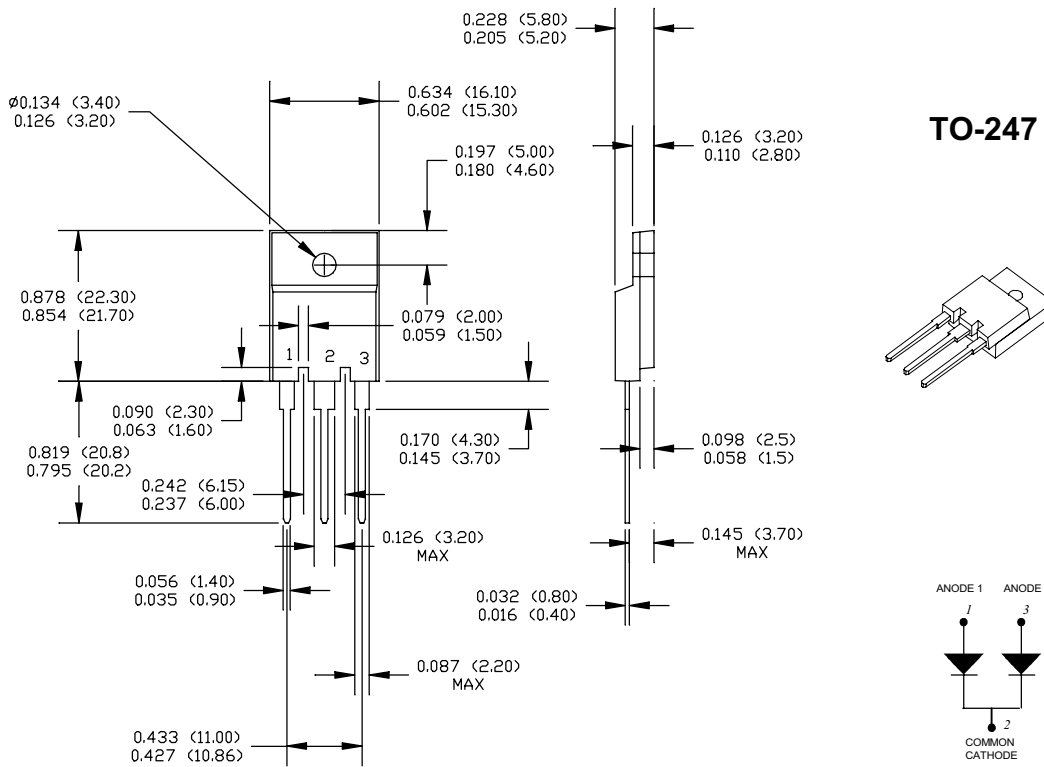

**Maximum Ratings:**

Characteristics	Symbol	Condition	Max.	Units
Peak Inverse Voltage	V_{RWM}	-	30	V
Max. Average Forward Current	$I_{F(AV)}$	50% duty cycle @ $T_C = 120^\circ\text{C}$, rectangular wave form	35(per leg)	A
			70(per device)	
Max. Peak One Cycle Non-Repetitive Surge Current (per leg)	I_{FSM}	8.3 ms, half Sine pulse	720	A
Non-Repetitive Avalanche Energy (per leg)	E_{AS}	$T_J = 25^\circ\text{C}$, $I_{AS} = 2\text{ A}$, $L = 9.0\text{ mH}$	27	mJ
Repetitive Avalanche Current (per leg)	I_{AR}	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical	6	A

Electrical Characteristics:


Characteristics	Symbol	Condition	Max.	Units
Max. Forward Voltage Drop (per leg)*	V_{F1}	@ 35 A, Pulse, $T_J = 25^\circ\text{C}$	0.51	V
		@ 70 A, Pulse, $T_J = 25^\circ\text{C}$	0.61	
	V_{F2}	@ 35 A, Pulse, $T_J = 125^\circ\text{C}$	0.43	V
		@ 70 A, Pulse, $T_J = 125^\circ\text{C}$	0.58	
Max. Reverse Current (per leg)*	I_{R1}	@ $V_R = \text{rated } V_R$ $T_J = 25^\circ\text{C}$	1.9	mA
		@ $V_R = \text{rated } V_R$ $T_J = 125^\circ\text{C}$	450	
Max. Junction Capacitance (per leg)	C_T	@ $V_R = 5\text{V}$, $T_C = 25^\circ\text{C}$ $f_{SIG} = 1\text{MHz}$	4600	pF
Typical Series Inductance (per leg)	L_S	Measured lead to lead 5 mm from package body	7.5	nH
Max. Voltage Rate of Change	dv/dt	-	10,000	V/ μs

* Pulse Width < 300 μs , Duty Cycle <2%**Thermal-Mechanical Specifications:**


Characteristics	Symbol	Condition	Specification	Units
Max. Junction Temperature	T_J	-	-55 to +150	$^\circ\text{C}$
Max. Storage Temperature	T_{stg}	-	-55 to +150	$^\circ\text{C}$
Maximum Thermal Resistance Junction to Case	$R_{\theta JC}$	DC operation	0.8(per leg)	$^\circ\text{C/W}$
			0.4(per package)	
Maximum Thermal Resistance, Case to Heat Sink	$R_{\theta CS}$	Mounting surface, smooth and greased	0.25	$^\circ\text{C/W}$
Approximate Weight	wt	-	6	g
Mounting Torque	T_M	-	6 (min) 12 (max)	Kg-cm
Case Style	TO-247AC			



Typical Forward Characteristics

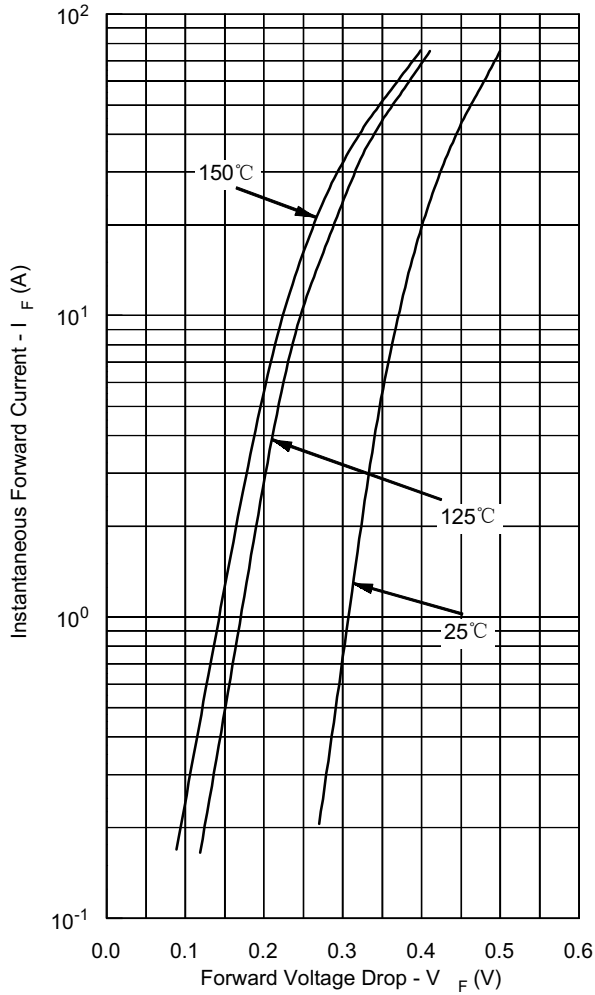

Typical Reverse Characteristics

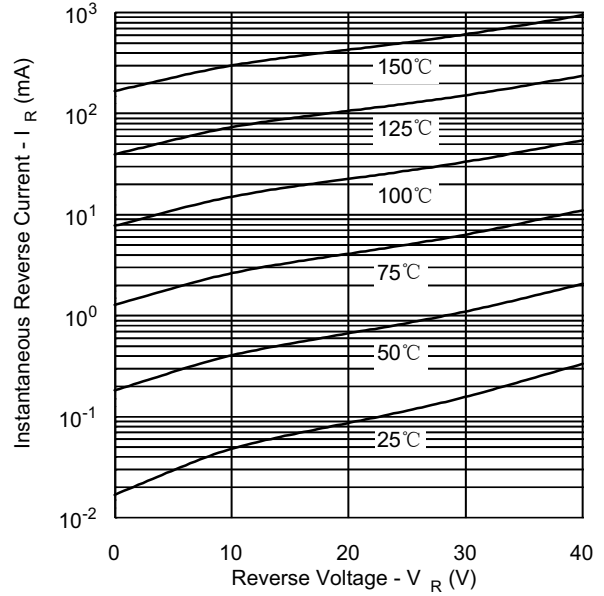

Typical Junction Capacitance

