

Applications

- Automotive applications
 - diesel fuel preheating
 - defrosting (e.g. spray nozzle heating)
- Low-voltage home appliances

Features


- Silver metallization
- Suitable for clamp contacting
- Self-regulating

Options

Other dimensions and ratings on request

Delivery mode

Packed in deep-drawn trays

Dimensional drawing


Dimensions (mm)

General technical data

Max. operating voltage	V_{\max}	30	VDC
Rated voltage	V_N	12	VDC
Breakdown voltage	V_{BD}	> 36	V
Operating temperature range ($V = 0$)	T_{op}	- 40/+ 200	°C
	T_{op}	- 25/+ 60	°C
	T_{op}	- 25/+ 100	°C
Resistance tolerance	ΔR_N	± 30 % ¹⁾	
Curvature		< 0,2	mm



1) Tolerance not valid for B59060A0000A010

Electrical specifications and ordering codes

T_{Ref} °C	R_{min} ($V = V_N$) Ω	$T_{surf}^{(2)}$ ($V = V_N$) °C	R_N ($V_{meas} \leq 1,5 V$) Ω	Ordering code
0	20 ¹⁾	40	≥ 320	B59060A0000A010
40	4 ¹⁾	70	9	B59060A0040A010
60	5	80	9	B59060A0060A010
80	4	95	9	B59060A0080A010
120	4	130	9	B59060A0120A010
160	3	165	9	B59060A0160A010
180	3	185	9	B59060A0180A010
220	2	210	9	B59060A0220A010
280	3	265	18	B59060A0280A010

Characteristics (typical)

PTC resistance R_{PTC} versus PTC temperature T_{PTC}
(measured at low signal voltage)

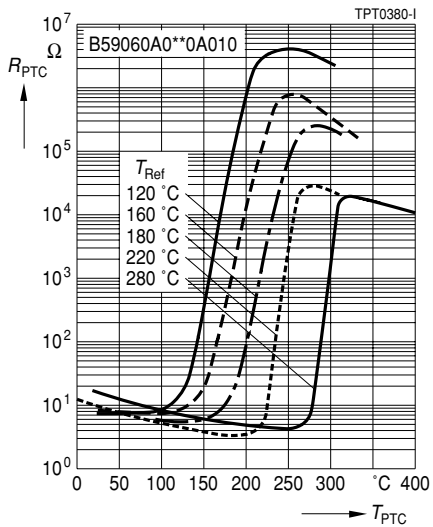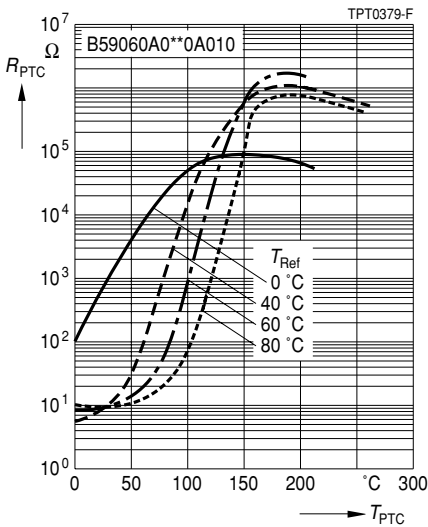

1) $T (R_{PTC} = R_{min}) < 25^\circ C$

2) Measured between points

Herausgegeben von EPCOS AG

Unternehmenskommunikation, Postfach 80 17 09, 81617 München, DEUTSCHLAND

☎ ++49 89 636 09, FAX (0 89) 636-2 26 89

© EPCOS AG 2002. Vervielfältigung, Veröffentlichung, Verbreitung und Verwertung dieser Broschüre und ihres Inhalts ohne ausdrückliche Genehmigung der EPCOS AG nicht gestattet.

Bestellungen unterliegen den vom ZVEI empfohlenen Allgemeinen Lieferbedingungen für Erzeugnisse und Leistungen der Elektroindustrie, soweit nichts anderes vereinbart wird.

Diese Broschüre ersetzt die vorige Ausgabe.

Fragen über Technik, Preise und Liefermöglichkeiten richten Sie bitte an den Ihnen nächstgelegenen Vertrieb der EPCOS AG oder an unsere Vertriebsgesellschaften im Ausland. Bauelemente können aufgrund technischer Erfordernisse Gefahrstoffe enthalten. Auskünfte darüber bitten wir unter Angabe des betreffenden Typs ebenfalls über die zuständige Vertriebsgesellschaft einzuholen.

Published by EPCOS AG

Corporate Communications, P.O. Box 80 17 09, 81617 Munich, GERMANY

☎ ++49 89 636 09, FAX (0 89) 636-2 26 89

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.