


FRD Type : C10P40FR

OUTLINE DRAWING

FEATURES

- * Dual Diodes – Anode Common
- * Ultra – Fast Recovery
- * Low Forward Voltage Drop
- * High Surge Capability
- * 200 Volts thru 600 Volts Types Available

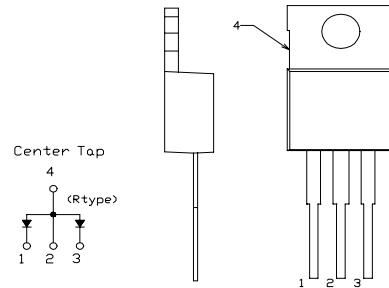

Maximum Ratings


Approx Net Weight: 1.9g

Rating	Symbol	C10P40FR			Unit	
Repetitive Peak Reverse Voltage	V _{RRM}	400			V	
Non-repetitive Peak Reverse Voltage	V _{RSM}	440			V	
Average Rectified Output Current	I _o	10	T _c =112°C	50 Hz, Full Sine Wave Resistive Load	A	
RMS Forward Current	I _{F(RMS)}	11.1			A	
Surge Forward Current	I _{FSM}	80	50 Hz Full Sine Wave, 1cycle Non-repetitive			A
Operating Junction Temperature Range	T _{jw}	- 40 to + 150			°C	
Storage Temperature Range	T _{stg}	- 40 to + 150			°C	
Mounting torque		0.5	Recommended value			N•m

Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Current	I _{RM}	T _j =25°C, V _{RM} =V _{RRM} per Arm	-	-	30	µA
Peak Forward Voltage	V _{FM}	T _j =25°C, I _{FM} =5A per Arm	-	-	1.25	V
Reverse Recovery Time	trr	I _{FM} = 5 A, -di/dt= 50 A/µs, Ta= 25°C	-	-	45	ns
Thermal Resistance	R _{th(j-c)}	Junction to Case	-	-	3	°C/W

C10P40FR OUTLINE DRAWING (Dimensions in mm)

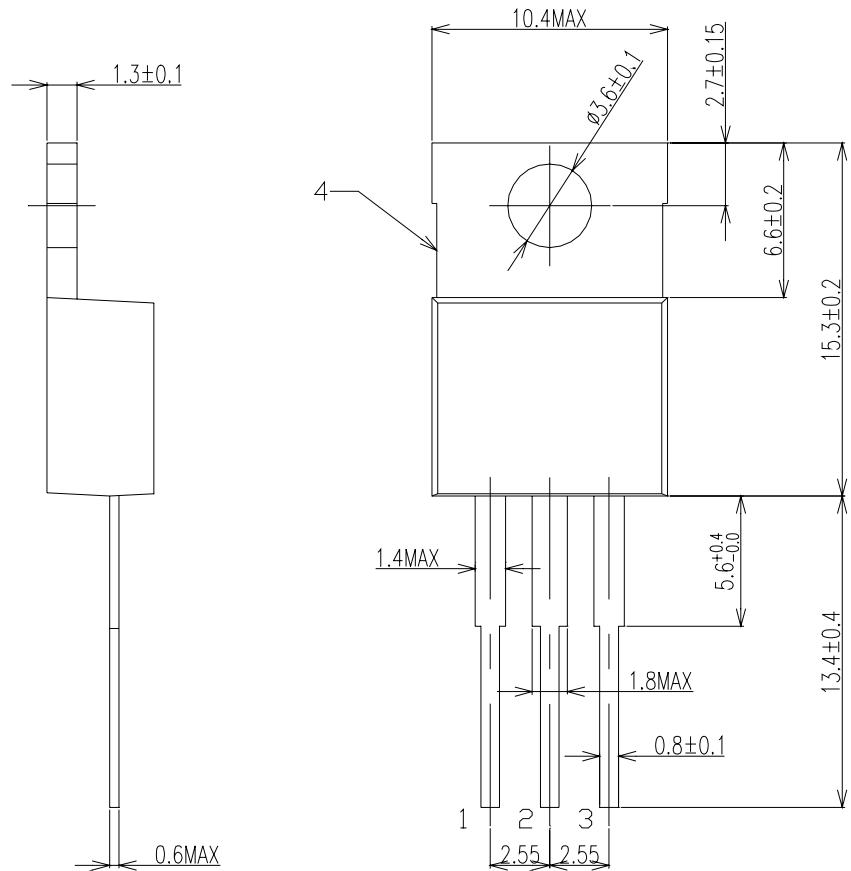

Center Tap

