


# SBD Type : C20T10Q-11A

## OUTLINE DRAWING

### FEATURES

- \*Tabless TO-220
- \*Dual Diodes – Cathode Common
- \*Low Forward Voltage Drop
- \*High Surge Capability
- \* $T_j=150^\circ\text{C}$  operation

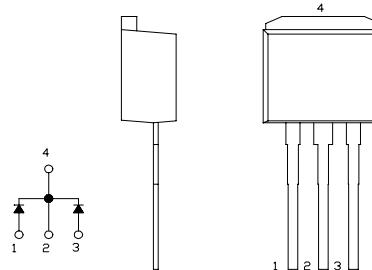

### Maximum Ratings

Approx Net Weight: 1.45g

| Rating                              | Symbol       | C20T10Q-11A |  |                                     | Unit |
|-------------------------------------|--------------|-------------|--|-------------------------------------|------|
| Repetitive Peak Reverse Voltage     | $V_{RRM}$    | 100         |  |                                     | V    |
| Average Rectified Output Current    | $I_o$        | 20          | $T_c=120^\circ\text{C}$                    | 50 Hz Full Sine Wave Resistive Load | A    |
| RMS Forward Current                 | $I_{F(RMS)}$ | 22.2        |  |                                     | A    |
| Surge Forward Current               | $I_{FSM}$    | 180         | 50Hz Full Sine Wave ,1cycle Non-repetitive |                                     |      |
| Operating JunctionTemperature Range | $T_{jw}$     | -40 to +150 |  |                                     | °C   |
| Storage Temperature Range           | $T_{stg}$    | -40 to +150 |  |                                     | °C   |

### Electrical • Thermal Characteristics

| Characteristics      | Symbol      | Conditions  | Min. | Typ. | Max. | Unit  |
|----------------------|-------------|---|------|------|------|-------|
| Peak Reverse Current | $I_{RM}$    | $T_j= 25^\circ\text{C}, V_{RM}= V_{RRM}$ per arm      | -    | -    | 1    | mA    |
| Peak Forward Voltage | $V_{FM}$    | $T_j= 25^\circ\text{C}, I_{FM}= 10 \text{ A}$ per arm | -    | -    | 0.88 | V     |
| Thermal Resistance   | $R_{thj-c}$ | Junction to Case                                      | -    | -    | 1.5  | °C /W |

**C20T10Q-11A OUTLINE DRAWING (Dimensions in mm)**
