



**TO-220F Plastic-Encapsulate Voltage Regulator**

**CJ7908F** Three-terminal negative voltage regulator


**FEATURES**

Maximum Output Current

$I_{OM}$ : 1.5 A

Output voltage

$V_o$ : -8 V

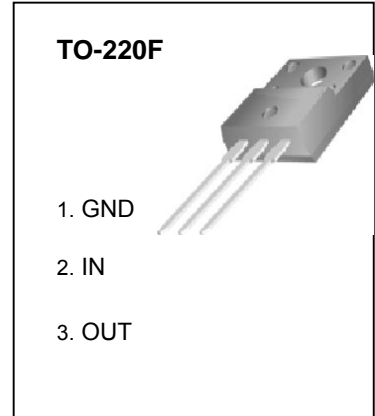

**ABSOLUTE MAXIMUM RATINGS** ( operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	$V_i$	-35	V
Operating Junction Temperature Range	$T_{OPR}$	0-+150	°C
Storage Temperature Range	$T_{STG}$	-65-+150	°C

**ELECTRICAL CHARACTERISTICS** ( $V_i=-14V, I_o= 500mA, 0^{\circ}C < T_J < 125^{\circ}C, C_i=2 \mu F, C_o=0.1 \mu F$ , unless otherwise specified )

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	$V_o$	$T_J=25^{\circ}C$	-7.7	-8	-8.3	V
		$-10.5V \leq V_i \leq -23V, I_o=5mA-1A P \leq 15W$	-7.6	-8	-8.4	V
Load Regulation	$\Delta V_o$	$T_J=25^{\circ}C, I_o=5mA-1.5A$		15	160	mV
		$T_J=25^{\circ}C, I_o=250mA-750mA$		5	80	mV
Line regulation	$\Delta V_o$	$-10.5V \leq V_i \leq -25V, T_J=25^{\circ}C$		12.5	160	mV
		$-11V \leq V_i \leq -17V, T_J=25^{\circ}C$		4	80	mV
Quiescent Current	$I_q$	$T_J=25^{\circ}C$		1.5	2	mA
Quiescent Current Change	$\Delta I_q$	$-10.5V \leq V_i \leq -25V$		0.15	1	mA
	$\Delta I_q$	$5mA \leq I_o \leq 1A$		0.08	0.5	mA
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100KHz$		200		$\mu V$
Ripple Rejection	RR	$-11.5V \leq V_i \leq -21.5V, f=120Hz, T_J=25^{\circ}C$	54	60		dB
Dropout Voltage	$V_d$	$T_J=25^{\circ}C, I_o=1A$		1.1		V
Peak Current	$I_{pk}$	$T_J=25^{\circ}C$		2.1		A

**TYPICAL APPLICATION**

