


FEATURES

- Low Noise Figure: NF = 2.0dB (Typ.) @ f=40 GHz
- High Associated Gain: $G_{as} = 18\text{dB}$ (Typ.) @ f=40 GHz
- Wide Frequency Band: 36-40 GHz
- High Output Power: 9dBm (Typ.) @ f=40 GHz
- Impedance Matched $Z_{in}/Z_{out} = 50\Omega$

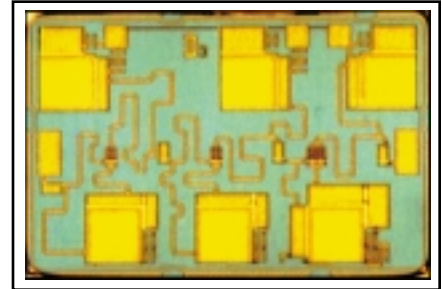

DESCRIPTION

The FMM5704X is a LNA MMIC designed for applications in the 36-40 GHz frequency range. This product is well suited for satellite communications, radio link, and applications where low noise and high dynamic range are required.

ABSOLUTE MAXIMUM RATING (Ambient Temperature $T_a=25^\circ\text{C}$)

Item	Symbol	Condition	Rating	Unit
Drain-Source Voltage	V_{DD}		4	V
Input Power	P_{in}		-3	dBm
Storage Temperature	T_{stg}		-65 to +175	$^\circ\text{C}$
Operating Backside Temperature	T_{op}		-45 to +125	$^\circ\text{C}$

Fujitsu recommends the following conditions for the long term reliable operation of GaAs FETs:

1. The drain-source operating voltage (V_{DD}) should not exceed 3 volts.
2. This product should be hermetically packaged.

ELECTRICAL CHARACTERISTICS (Ambient Temperature $T_a=25^\circ\text{C}$)

Item	Symbol	Conditions (2)	Limits			Unit
			Min.	Typ.	Max.	
Noise Figure	NF	$V_{DD} = 3\text{V}$ $f = 40\text{GHz}$ $I_{DD} = 20\text{mA}$ (Typ.) $Z_S = Z_L = 50\Omega$	-	2.0	2.5	dB
Associated Gain	G_{as}		15	18	20	dB
Output Power at 1dB G.C.P.	$P_{1\text{dB}}$		-	9	-	dBm
Input Return Loss	RL_{in}		-	-10	-	dB
Output Return Loss	RL_{out}		-	-10	-	dB


Note 1: RF parameter sample size 10pcs. Criteria (accept/reject)=(0/1)

Note 2: Electrical Characteristics specified with RF-probe measurement.


FMM5704X

36-40GHz LNA MMIC


NOISE FIGURE & G_{AS} vs. FREQUENCY

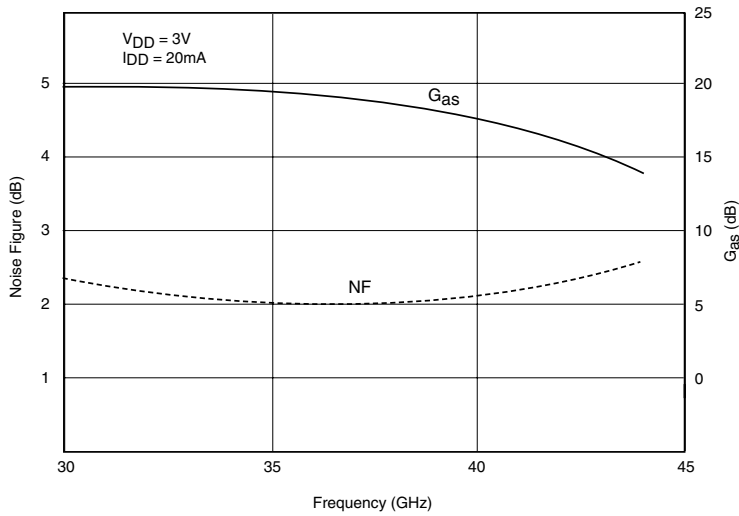


P1dB & G1dB vs. FREQUENCY

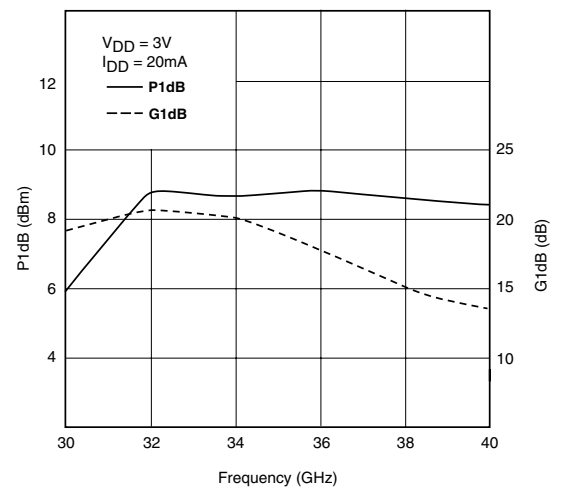

OUTPUT POWER vs. INPUT POWER

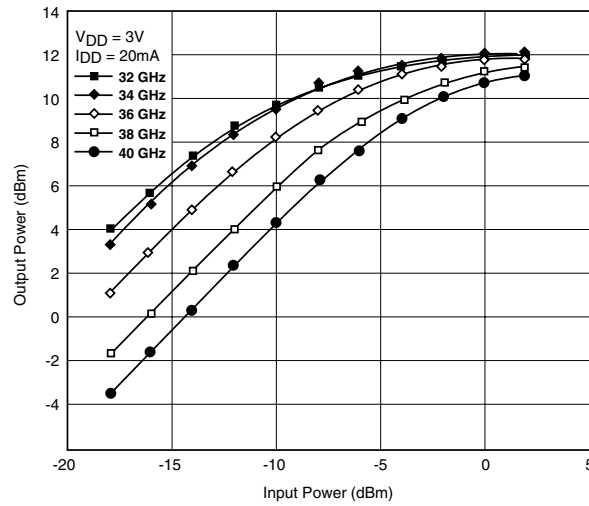

ASSEMBLY DRAWING

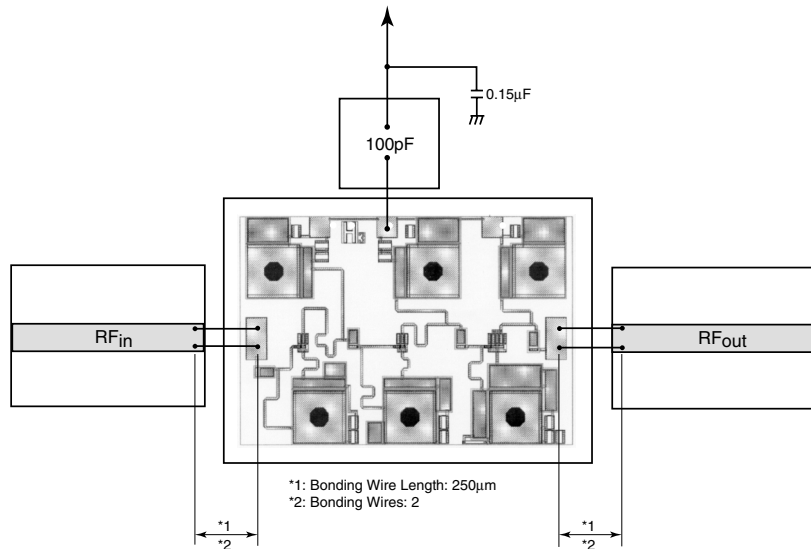


S-PARAMETERS $V_{DD} = 3V, I_{DS} = 20mA$

FREQUENCY (MHZ)	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
16000	.920	133.9	.067	41.5	.004	62.1	.831	-166.6
16500	.926	128.0	.084	35.3	.002	24.5	.828	-169.9
17000	.936	122.0	.097	26.4	.001	-62.6	.826	-173.2
17500	.945	115.7	.118	20.1	.000	-174.7	.824	-176.5
18000	.957	109.4	.138	8.9	.002	101.1	.823	-179.7
18500	.968	102.7	.161	3.4	.002	82.9	.821	176.8
19000	.977	96.1	.204	-6.5	.004	56.0	.815	173.5
19500	.990	89.0	.256	-15.3	.004	37.8	.814	170.4
20000	1.000	82.2	.299	-23.2	.005	19.7	.810	167.2
20500	1.012	75.0	.369	-34.0	.006	5.3	.809	163.9
21000	1.023	67.4	.446	-43.4	.005	-12.1	.808	160.7
21500	1.039	59.7	.551	-54.3	.006	-15.5	.808	157.5
22000	1.052	51.7	.635	-64.0	.007	-24.4	.809	154.1
22500	1.054	43.1	.757	-75.1	.006	-28.5	.808	150.5
23000	1.063	34.8	.925	-86.0	.008	-34.6	.809	147.4
23500	1.065	25.8	1.117	-98.2	.008	-52.7	.814	143.7
24000	1.061	16.5	1.340	-108.5	.007	-66.0	.815	139.5
24500	1.048	7.4	1.546	-122.4	.008	-66.7	.815	135.7
25000	1.042	-2.2	1.786	-133.5	.007	-72.4	.815	131.1
25500	1.022	-12.0	2.093	-144.8	.006	-87.8	.816	126.1
26000	1.002	-21.9	2.560	-155.7	.004	-88.2	.814	121.7
26500	.976	-32.2	3.037	-168.2	.004	-65.8	.813	116.7
27000	.932	-43.0	3.736	-175.5	.004	-71.0	.816	111.4
27500	.882	-53.5	4.235	-158.4	.003	-70.8	.816	105.3
28000	.832	-64.9	4.917	-143.9	.004	-20.4	.801	98.4
28500	.773	-75.0	5.691	-131.5	.003	-15.5	.795	89.7
29000	.722	-85.4	6.558	-117.1	.006	0.7	.752	81.0
29500	.659	-98.6	7.712	-100.0	.010	-16.3	.705	74.3
30000	.557	-109.6	8.807	-79.4	.012	-16.5	.670	64.5
30500	.487	-121.1	9.847	-61.7	.016	-34.9	.619	54.6
31000	.385	-136.5	10.915	-42.3	.018	-47.2	.554	45.6
31500	.287	-140.5	11.425	-24.0	.018	-58.4	.487	34.5
32000	.227	-142.4	12.051	-4.7	.019	-63.5	.406	23.6
32500	.157	-147.4	12.664	-14.5	.020	-71.3	.323	14.8
33000	.122	-139.5	12.612	-33.4	.022	-76.7	.264	3.5
33500	.088	-134.7	12.479	-51.5	.023	-86.7	.217	-12.7
34000	.107	-119.7	11.885	-69.8	.024	-96.3	.174	-37.2
34500	.116	-113.0	11.451	-86.2	.024	-105.6	.138	-71.8
35000	.090	-122.0	10.651	-102.1	.024	-113.1	.111	-114.6
35500	.071	-116.2	9.866	-116.0	.023	-115.1	.107	-155.2
36000	.049	-97.4	9.103	-128.4	.024	-120.8	.123	-174.6
36500	.076	-90.5	8.559	-141.1	.027	-127.8	.138	-179.0
37000	.096	-97.5	8.196	-151.7	.029	-137.6	.176	177.3
37500	.076	-111.1	7.751	-164.8	.031	-153.1	.225	165.9
38000	.063	-85.5	7.109	-174.9	.029	-168.7	.248	153.5
38500	.071	-68.8	6.467	-175.0	.025	178.9	.263	144.4
39000	.076	-71.8	6.302	-166.3	.022	171.6	.283	135.7
39500	.096	-69.3	6.072	-158.0	.019	167.2	.291	127.7
40000	.115	-65.9	5.836	-149.4	.016	165.6	.282	119.0

FMM5704X

36-40GHz LNA MMIC

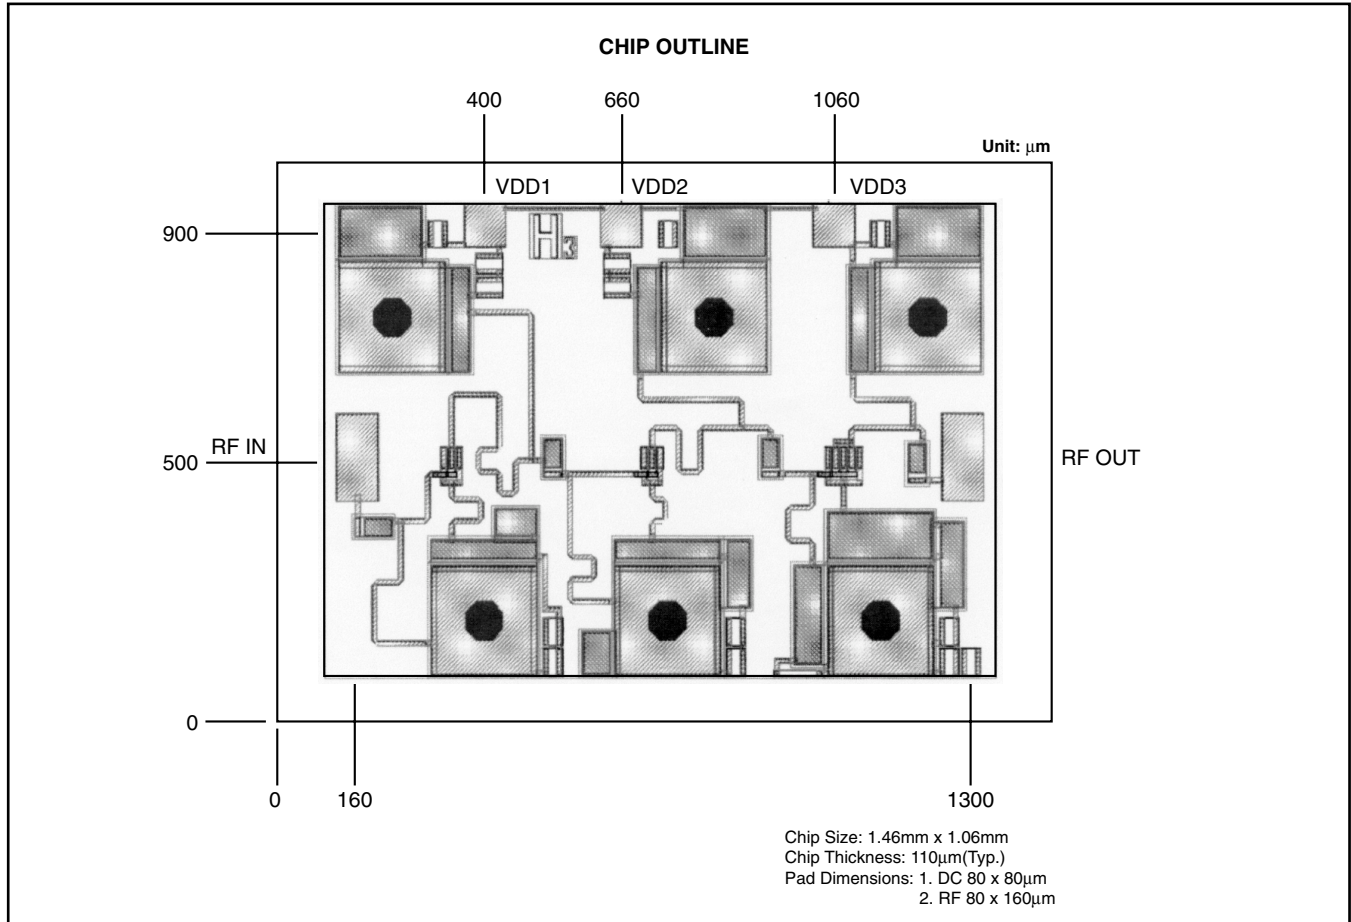

For further information please contact:
FUJITSU COMPOUND SEMICONDUCTOR, INC.
2355 Zanker Rd.
San Jose, CA 95131-1138, U.S.A.
Phone: (408) 232-9500
FAX: (408) 428-9111
www.fcsi.fujitsu.com

FUJITSU MICROELECTRONICS EUROPE, GmbH
Quantum Devices Division
Network House
Norreys Drive
Maidenhead, Berkshire SL6 4FJ
Phone: +44 (0)1628 504800
FAX: +44 (0)1628 504888

CAUTION

Fujitsu Compound Semiconductor Products contain **gallium arsenide (GaAs)** which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- Do not ingest.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.

Fujitsu Limited reserves the right to change products and specifications without notice. The information does not convey any license under rights of Fujitsu Limited or others.

© 2000 FUJITSU COMPOUND SEMICONDUCTOR, INC.
Printed in U.S.A. FCSI05009M200