


80 Amp Schottky Rectifier

FST84180—FST84200

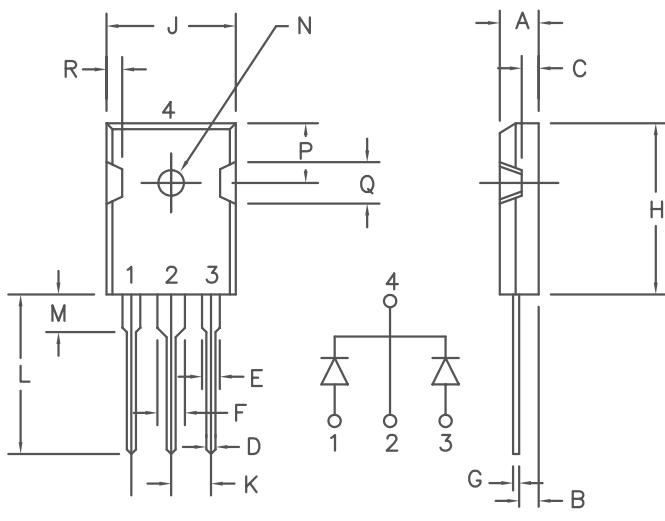

| Dim. | Inches | | Millimeter | | Notes |
|------|---------|---------|------------|---------|-------|
| | Minimum | Maximum | Minimum | Maximum | |
| A | .185 | .209 | 4.70 | 5.31 | |
| B | .087 | .102 | 2.21 | 2.59 | |
| C | .059 | .098 | 1.50 | 2.49 | |
| D | .040 | .055 | 1.02 | 1.40 | |
| E | .079 | .094 | 2.01 | 2.39 | |
| F | .118 | .133 | 3.00 | 3.38 | |
| G | .016 | .031 | .410 | 0.78 | |
| H | .819 | .883 | 20.80 | 22.4 | |
| J | .627 | .650 | 15.93 | 16.5 | |
| K | .215 | — | 5.46 | — | Typ. |
| L | .790 | .810 | 20.07 | 20.6 | |
| M | .157 | .180 | 3.99 | 4.57 | |
| N | .139 | .144 | 3.53 | 3.66 | Dia. |
| P | .255 | .300 | 6.48 | 7.62 | |
| Q | .170 | .210 | 4.32 | 5.33 | |
| R | .080 | .110 | 2.03 | 2.79 | |

Microsemi Catalog Number

Industry Part Number

Repetitive Peak Reverse Voltage

Transient Peak Reverse Voltage

FST84180

180V

180V

FST84200

200V

200V

- Schottky barrier rectifier
- V_{RRM} 180–200 Volts
- 2 x 40 Amperes Avg.
- 175°C Junction Temperature
- High Surge capability

Electrical Characteristics

Average forward current per pkg.

$I_{F(AV)}$ 80 Amps

$T_J = 142^\circ\text{C}$, square wave

Average forward current per leg

$I_{F(AV)}$ 40 Amps

$T_J = 142^\circ\text{C}$, square wave

Maximum surge current per leg

I_{FSM} 600 Amps

8.3ms, half sine, $T_J = 175^\circ\text{C}$

Max. peak forward voltage per leg

V_{FM} .92 Volts

$|I_{FM} = 40\text{A}, T_J = 25^\circ\text{C}^*$

Typical peak forward voltage per leg

V_{FM} .80 Volts

$|I_{FM} = 40\text{A}, T_J = 125^\circ\text{C}^*$

Typical peak reverse current per leg

I_{RM} 2.0 mA

$V_{RRM}, T_J = 125^\circ\text{C}^*$

Max. peak reverse current per leg

I_{RM} 500 μA

$V_{RRM}, T_J = 25^\circ\text{C}$

Typical junction capacitance per leg

C_J 700 pF

$VR = 5.0\text{V}, T_J = 25^\circ\text{C}$

*Pulse test: Pulse width 300 usec. Duty Cycle 2%

Thermal and Mechanical Characteristics

Storage temp range

T_{STG}

-55°C to +175°C

Operating junction temp range

T_J

-55°C to +175°C

Max thermal resistance per leg

$R_{\theta JC}$

0.8°C/W junction to case

Max thermal resistance per pkg.

$R_{\theta JC}$

0.4°C/W junction to case

Typical thermal resistance per pkg.

$R_{\theta CS}$

0.25°C/W case to sink

Mounting Torque

8–12 inch pounds (#6 screw)

Weight

.22 ounces (6.36 grams) typical

FST84180—FST84200

Figure 1
Typical Forward Characteristics – Per Leg

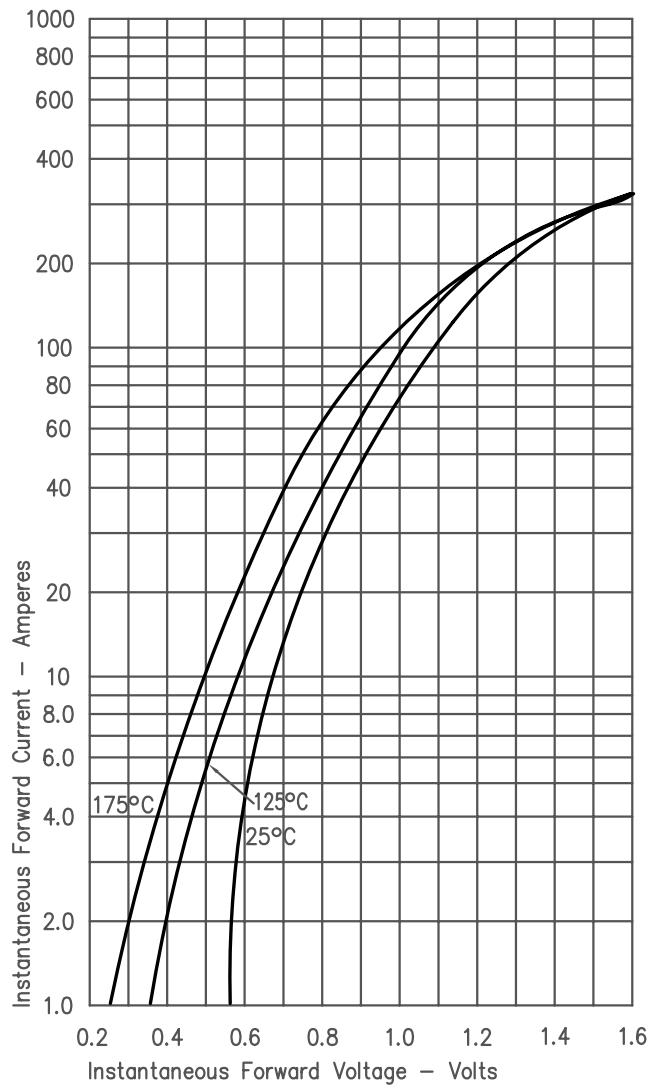


Figure 3
Typical Junction Capacitance – Per Leg

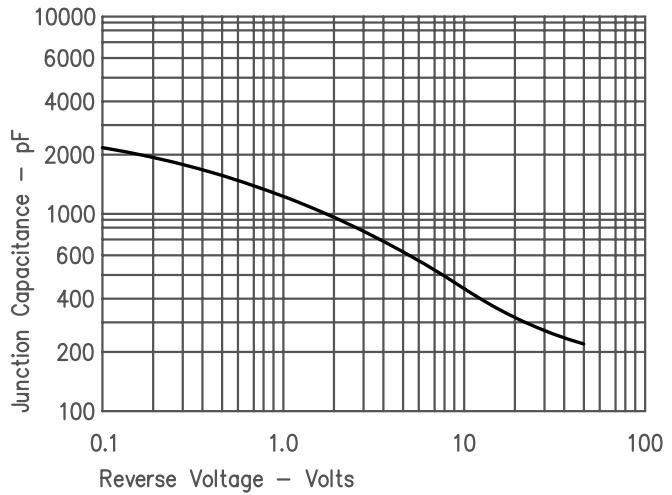


Figure 4
Forward Current Derating – Per Leg

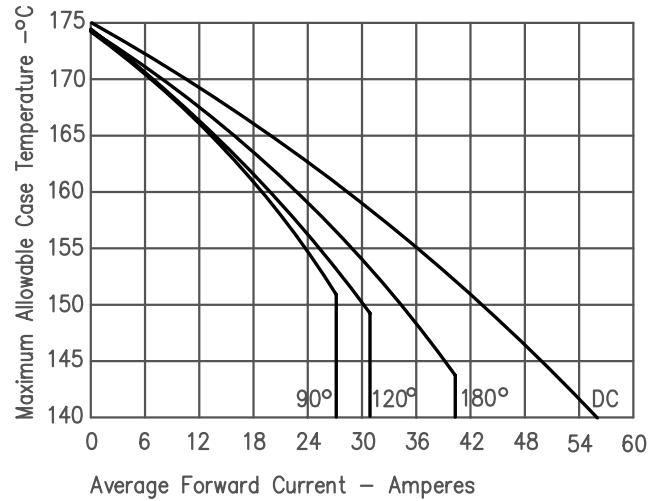


Figure 2
Typical Reverse Characteristics – Per Leg

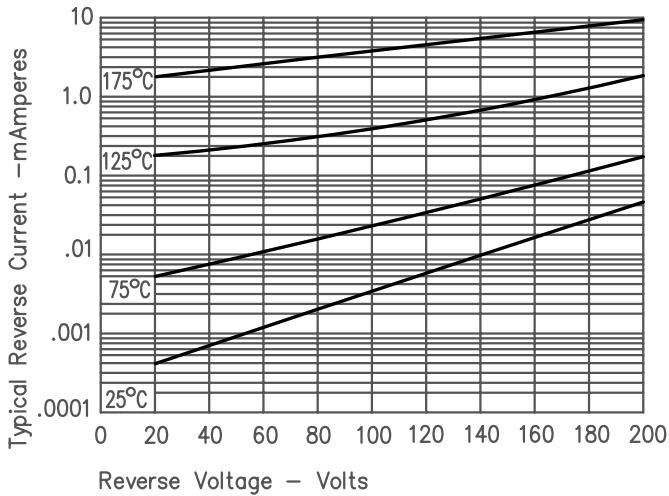


Figure 5
Maximum Forward Power Dissipation – Per Leg

