


GW Bi-Color Type

Conventional Part No. Global Part No. Lighting Color
 LN2162C68 – (TR) LN162C3JRA Pure Green / Orange

■ 絶対最大定格 Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)




Lighting Color	P_D (mW)	I_F (mA)	I_{FP} (mA)*	V_R (V)	T_{opr} ($^\circ\text{C}$)	T_{stg} ($^\circ\text{C}$)
Pure Green	45	15	60	3	-25 ~ +65	-30 ~ +75
Orange	45	15	60	3	-25 ~ +65	-30 ~ +75

I_{FP} の条件は $duty$ 10% , Pulse width 1 msec. The condition of I_{FP} is duty 10%, Pulse width 1 msec

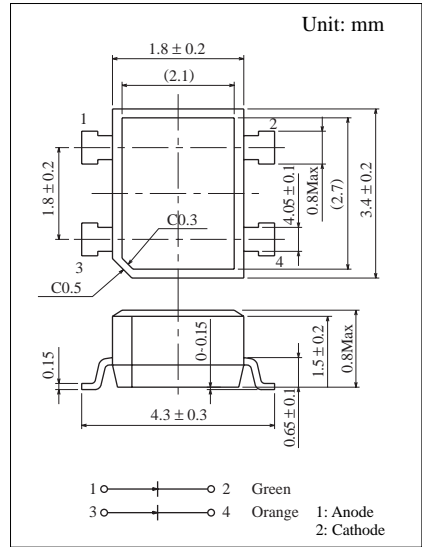


■ 電気的光学的特性 Electro-Optical Characteristics ($T_a = 25^\circ\text{C}$)

Conventional Part No.	Lighting Color	Lens Color	I_O		I_F	V_F		λ_P	$\Delta\lambda$	I_F	I_R	
			Typ	Min		Typ	Max				Max	V_R
LN2162C68 – (TR)	Pure Green	Clear	2.5	1.2	10	2.05	2.8	555	25	10	10	3
	Orange		2.1	0.8	10	1.95	2.8	630	40	10	10	3
Unit	—	—	mcd	mcd	mA	V	V	nm	nm	mA	μA	V

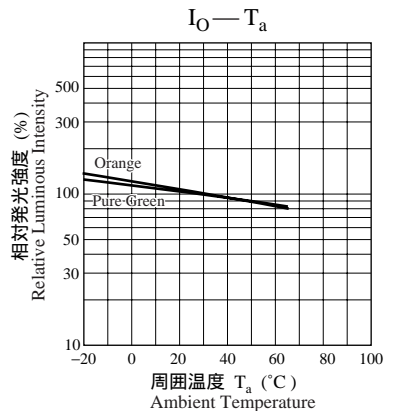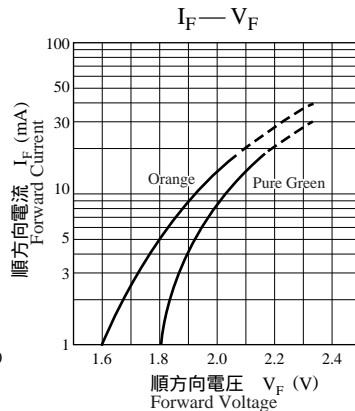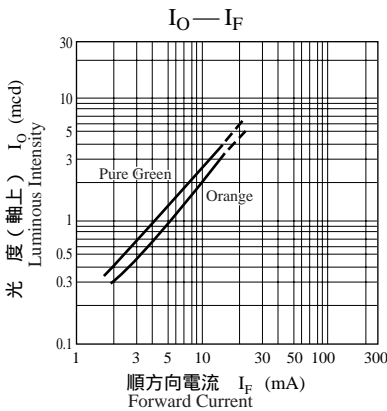

相对発光強度 — 波長特性
 Relative Luminous Intensity
 Wavelength Characteristics

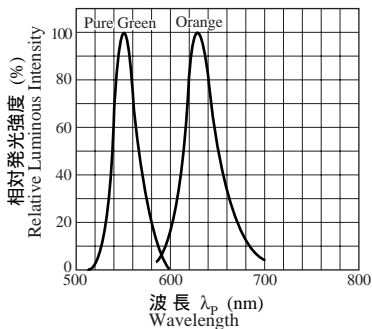

指向特性
 Directive Characteristics

