

**4:1 Flux Coupled Transformer  
1-350MHz**


**MABACT0067  
V1P**

**Features**


- Surface Mount
- 4:1 Impedance
- Excellent amplitude and phase balance
- Can be used in both 50Ω and 75Ω systems
- 260°C Reflow Compatible
- RoHS\* Compliant
- Available on Tape and Reel. Reel quantity 2000

**Description**





M/ACom's MABACT0067 is a 4:1 RF flux coupled step up transformer in a low cost, surface mount package. Ideally suited for high volume CATV/ Broadband applications.

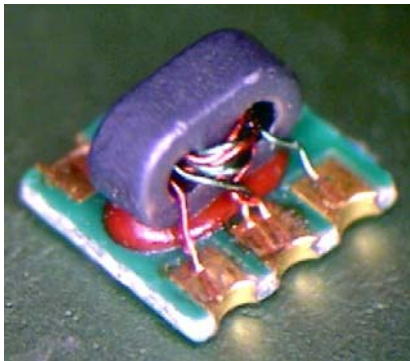

**Schematic**

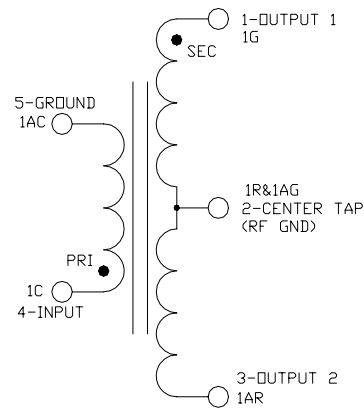

**Case Style: SM-164**



Dimensions in inches [mm] Tolerance: .xx ± .02, .xxx ± .010

**Pin Configuration**

Pin No.	Function
1	Secondary Dot (output 1)
2	Centre Tap (ground)
3	Secondary (output 2)
4	Primary Dot (Input)
5	Primary (Ground)

Note: Reference Application Note **M513** for reel size information.

**Ordering Information**

Part Number	Package
MABACT0067TR	2000 piece reel

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

**4:1 Flux Coupled Transformer  
1-350MHz**

**MABACT0067  
V1P**

**Electrical Specifications:  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 50\Omega$**


Parameter	Test Conditions	Units	Min	Typ	Max
Insertion Loss 1 (pin 4-1)	1 - 5 MHz	dB	-	1.6	2.0
	5 - 200 MHz		-	0.9	1.0
	200 - 350 MHz		-	1.0	1.5
Insertion Loss 2 (pin 4-3)	1 - 5 MHz	dB	-	1.5	2.0
	5 - 150 MHz		-	0.9	1.0
	150 - 350 MHz		-	1.1	1.5
Amplitude Unbalance (Nominal 0dB)	1 - 250 MHz	dB	-	$\pm 0.1$	$\pm 0.2$
	250 - 350 MHz		-	$\pm 0.2$	$\pm 0.3$
Phase Unbalance (Nominal 180°)	1 - 150 MHz	°	-	$\pm 1.0$	$\pm 2.0$
	150 - 350 MHz		-	$\pm 2.0$	$\pm 5.0$
Input Return Loss	1 - 5 MHz	dB	10	12	-
	5 - 200 MHz		15	19	-
	200 - 350 MHz		11	14	-

**Absolute Maximum Ratings <sup>1,2</sup>**

Parameter	Absolute Maximum
Max Input Power	250mW
DC current	240mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM does not recommend sustained operation near these survivability limits.

**Recommended PCB Configuration**

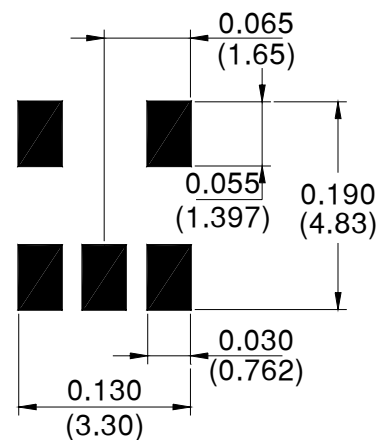


**4:1 Flux Coupled Transformer  
1-350MHz**


**MABACT0067  
V1P**

**Typical Performance Curves:  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 50\Omega$**


**Insertion Loss 1 (pin 4 to pin 1)**

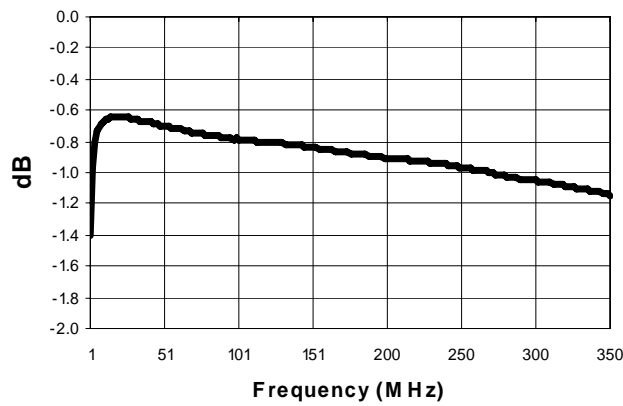


**Insertion Loss 2 (pin 4 to pin 3)**

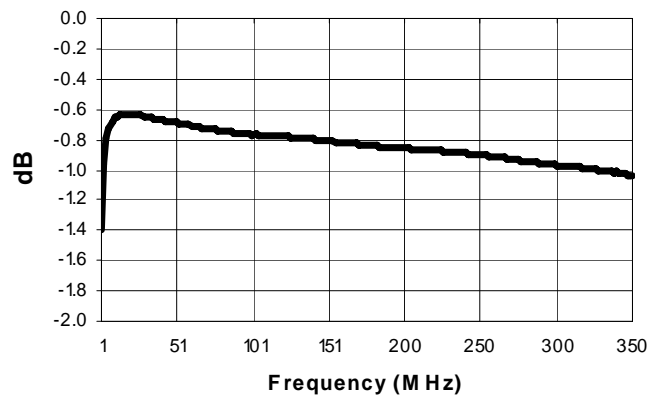

**Amplitude Unbalance**

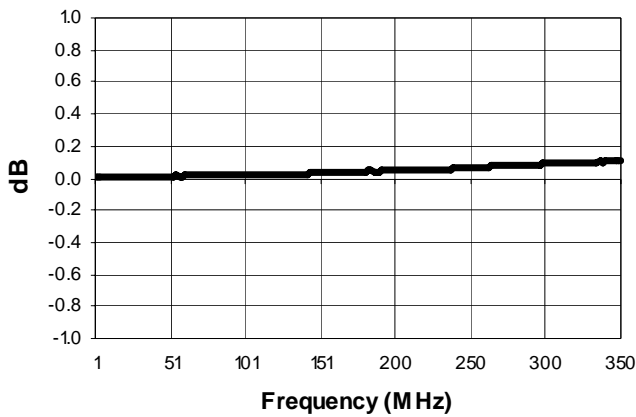

**Phase Balance**

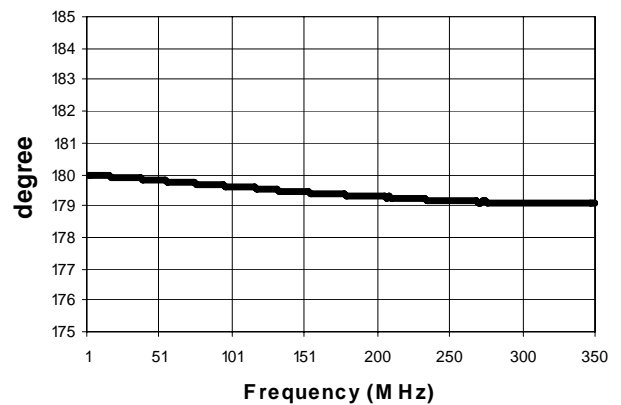

**Input Return Loss**

