


FEATURES

- 2 × 2 multianode
- Newly developed "metal channel dynode"
- High speed response
- Low cross - talk

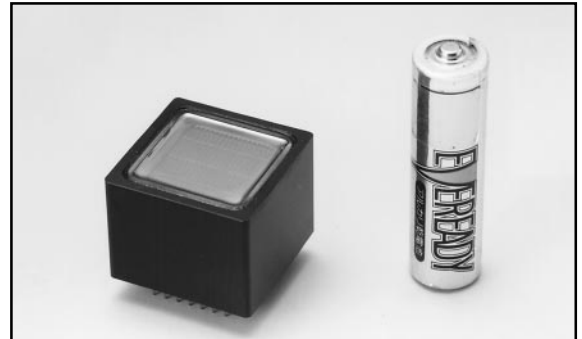

GENERAL

Parameter		Description / Value	Unit
Spectral Response		300 to 650	nm
Wavelength of Maximum Response		420	nm
Photocathode	Material	Bialkali	–
	Minimum Effective Area	18 × 18	mm ²
Window Material		Borosilicate glass	–
Dynode	Structure	Metal channel dynode	–
	Number of Stages	10	–
Weight		Approx. 26	g
Suitable Socket		E678-32B (option)	–

MAXIMUM RATINGS (Absolute Maximum Values)

Parameter		Value	Unit
Supply Voltage	Between Anode and Cathode	900	Vdc
Average Anode Current		0.1	mA

CHARACTERISTICS (at 25 °C)

Parameter		Min.	Typ.	Max.	Unit
Cathode Sensitivity	Luminous (2856 K)	50	70	–	μA/lm
	Blue (CS - 5 - 58 filter)	6	8	–	μA/lm-b
Anode Sensitivity	Luminous (2856 K)	25	140	–	A/lm
Gain		5 × 10 ⁵	2 × 10 ⁶	–	–
Anode Dark Current per Channel (after 30min. storage in darkness)		–	0.5	–	nA
Time Response	Anode Pulse Rise Time	–	1.2	–	ns
	Transit Time Spread (FWHM)	–	0.32	–	ns
Pulse Linearity per Channel (± 2 % deviation)		–	5(30 [ⓐ])	–	mA
Cross - talk (9 × 9 mm ² Aperture)		–	2	4	%
Uniformity Between Each Anode		–	1:1.5	1:3	–

NOTE : Anode characteristics are measured with the voltage distribution ration A shown below.

ⓐ : Measured with the special voltage distribution ratio B (Tapered Bleeder) shown below.

VOLTAGE DISTRIBUTION RATIO AND SUPPLY VOLTAGE

Electrodes	K	Dy1	Dy2	Dy3	Dy4	Dy5	Dy6	Dy7	Dy8	Dy9	Dy10	P
Ratio A	1.5	1.5	1.5	1	1	1	1	1	1	1	1	1
Ratio B (Tapered Bleeder)	1.5	1.5	1.5	1	1	1	1	1	1	2	3.6	

Supply Voltage: 800 Vdc, K: Cathode, Dy: Dynode, P: Anode

MULTIANODE PHOTOMULTIPLIER TUBE R5900U-00-M4

Figure 1: Typical Spectral Response

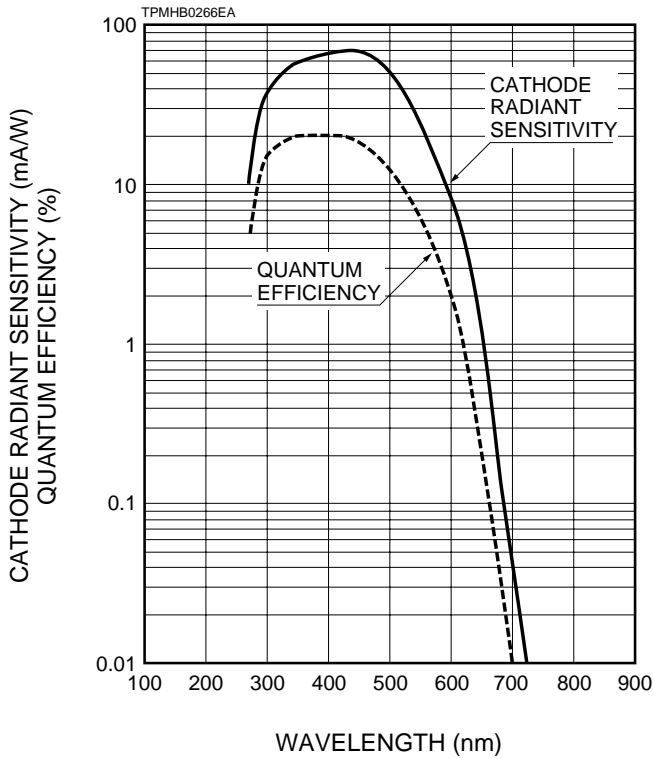


Figure 2: Typical Gain and Anode Dark Current

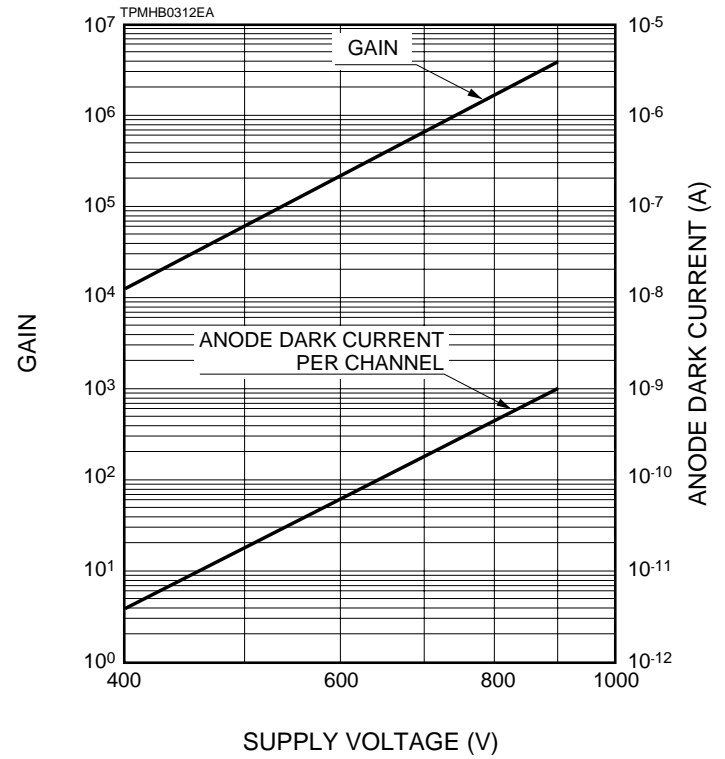


Figure 3: Typical Time Response

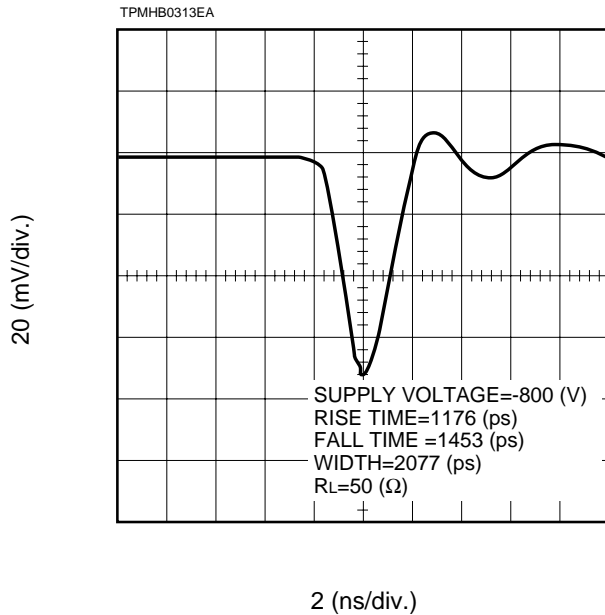


Figure 4: Typical T.T.S. Characteristic

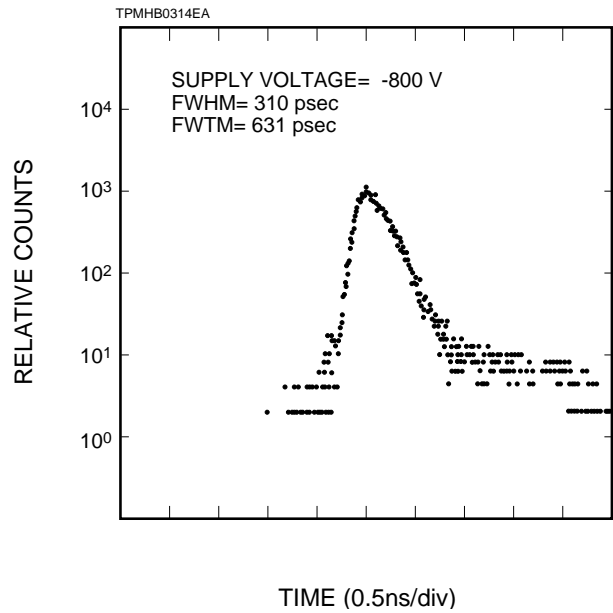


Figure 5: Pulse Linearity per Channel

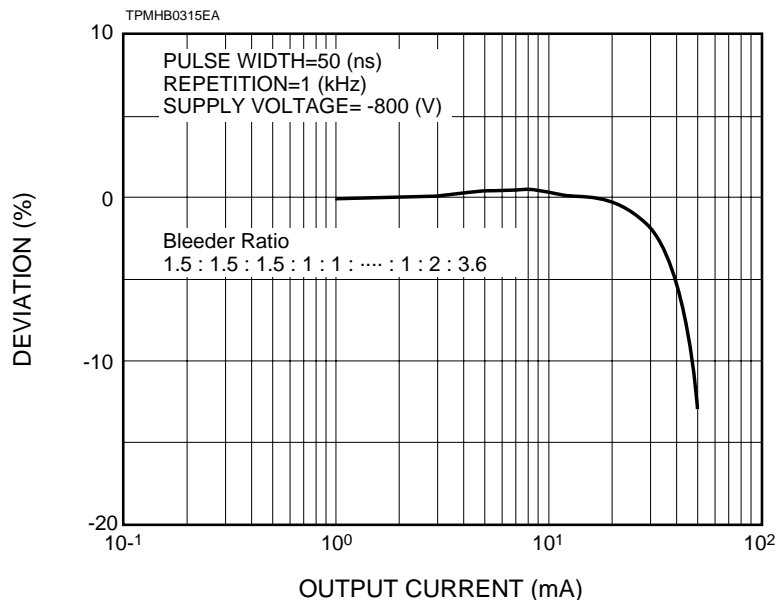


Figure 6: Anode Uniformity (Example)

82	95
97	100


Supply Voltage : 800 V
 Light Source : Lamp(uniform DC light)
 Full Illumination

Figure 7: Anode Cross Talk (Example)

0.1	0.9
1.3	100

Supply Voltage : 800 V
 Light Source : Lamp(uniform DC light)
 Spot Illumination : $9 \times 9 \text{ mm}^2$


Figure 8: Dimensional Outline and Basing Diagram (Unit: mm)

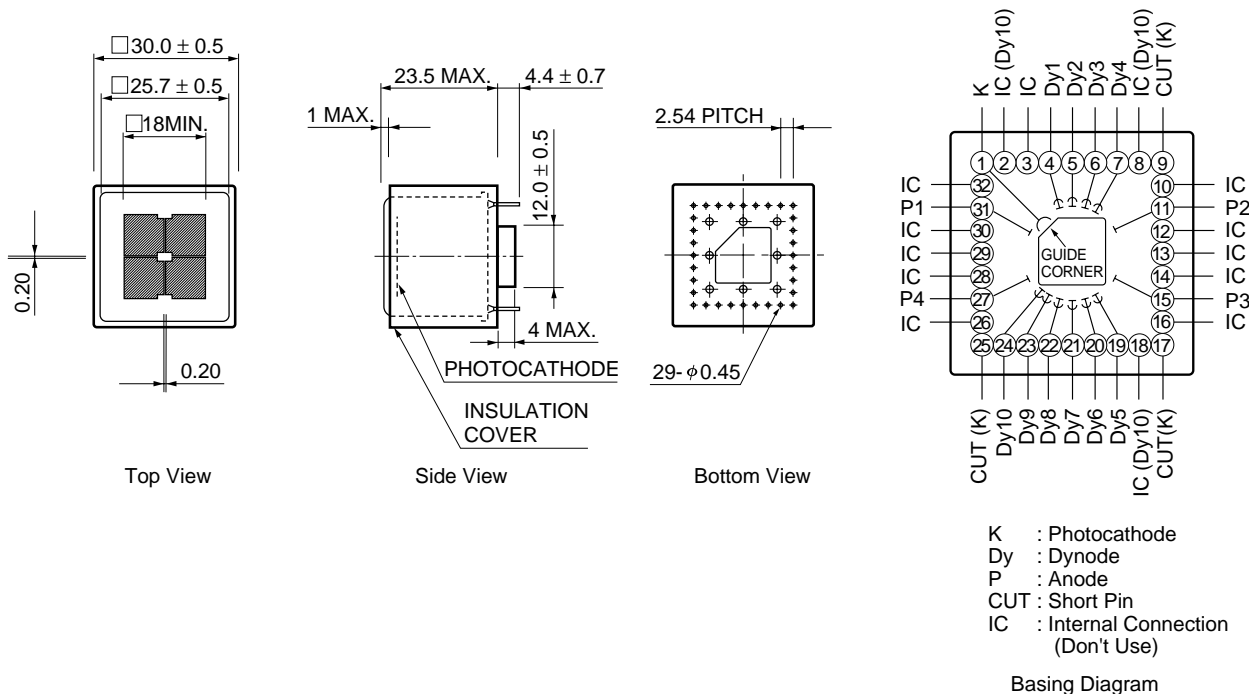

MULTIANODE PHOTOMULTIPLIER TUBE R5900U-00-M4

[ACCESSORIES] OPTION


● Socket E678-32B

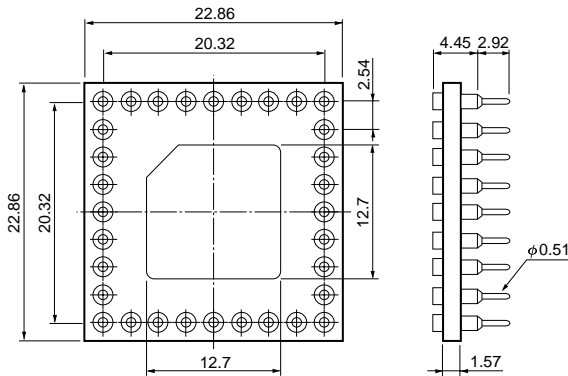


MATERIAL: Glass Epoxy

TACCA0094ED

● D Type Socket Assembly E7083

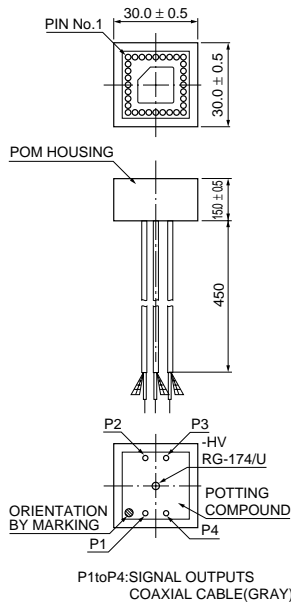

P1toP4: SIGNAL OUTPUTS
COAXIAL CABLE (GRAY)

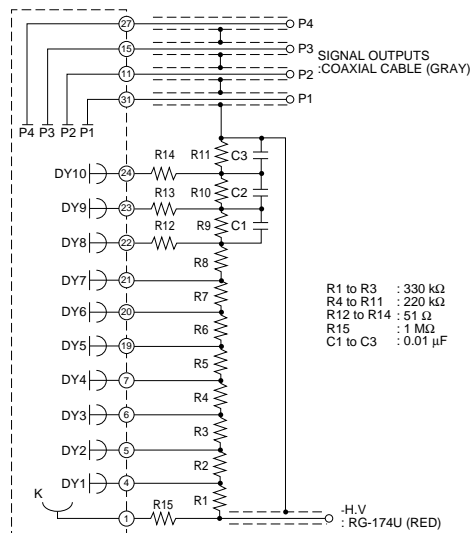

R1 to R3 : 330 kΩ
R4 to R11 : 220 kΩ
R12 to R14 : 51 Ω
R15 : 1 MΩ
C1 to C3 : 0.01 μF

*For a stable operation, all of anodes should be connected to ground potential through load resistors such as 100 k ohm or so, even if they are not used.

WARNING ~ High Voltage ~

TACCA0162EC

The product is operated at high voltage potential. Further, the metal housing of the product is connected to the photocathode (potential) so that it becomes a high voltage potential when the product is operated at a negative high voltage (anode grounded). Accordingly, extreme safety care must be taken for the electrical shock hazard to the operator or the damage to the other instruments.

* PATENT: USA Pat. No. 5410211 PATENT PENDING: JAPAN11, USA1, EUROPE2

HAMAMATSU

HOME PAGE URL <http://www.hamamatsu.com>

HAMAMATSU PHOTONICS K.K., Electron Tube Center

314-5, Shimokanzo, Toyooka-village, Iwata-gun, Shizuoka-ken, 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P. O. Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: Lough Point, 2 Gladbeck Way, Windmill Hill, Enfield, Middlesex EN2 7JA, United Kingdom, Telephone: 44(20)8-367-3560, Fax: 44(20)8-367-6384

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171-41 SOLNA, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01

Italy: Hamamatsu Photonics Italia: S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741

TPMH1126E09

DEC. 1999 SI

Printed in Japan(1000)