



SCL4040B

TWELVE STAGE BINARY COUNTER



LOGIC DIAGRAM

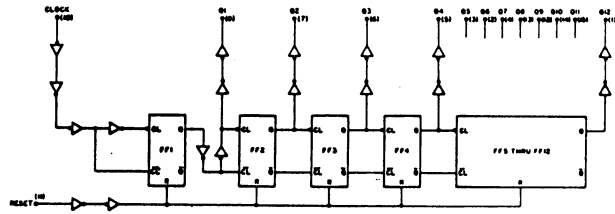

STATIC CHARACTERISTICS: ($V_{SS} = 0 V$)

PARAMETER	CONDITIONS	V_{DD} (Vdc)	T_{LOW}^*		+25°C			T_{HIGH}^{**}		UNIT
			MIN	MAX	MIN	TYP	MAX	MIN	MAX	
QUIESCENT DEVICE CURRENT I_{DD}	$V_{IN} = V_{SS}$ OR V_{DD}	5		5	0.05	5		150	μA_{dc}	
		10		10	0.1	10		300		
		15		20	0.2	20		600		

Note: * T_{LOW} = -55°C for C / H devices, -40°C for E / S devices, ** T_{HIGH} = +125°C for C / H devices, +85°C for E / S devices.

DYNAMIC CHARACTERISTICS: ($C_L = 50pF, T_A = 25°C$)

PARAMETER	V_{DD} (Vdc)	MINIMUM	TYPICAL	MAXIMUM	UNIT
PROPAGATION DELAY TIME t_{PLH}, t_{PHL} (CLOCK TO Q1)	5		180	320	ns
	10		80	160	
	15		65	130	
PROPAGATION DELAY TIME t_{PLH}, t_{PHL} (Q_i TO Q_{i+1})	5		100	200	ns
	10		40	60	
	15		30	30	
OUTPUT TRANSITION TIME t_{TLH}, t_{THL}	5		100	200	ns
	10		40	80	
	15		30	60	
CLOCK PULSE WIDTH MINIMUM PW_{CL}	5		70	140	ns
	10		30	60	
	15		20	40	
CLOCK FREQUENCY MAXIMUM f_{CL}	5	3	4.5		MHz
	10	6	9		
	15	7.5	11		
CLOCK RISE & FALL TIME MAXIMUM t_{rCL}, t_{fCL}	5	50	100		μs
	10	50	100		
	15	50	100		

RESET OPERATIONS

PROPAGATION DELAY TIME t_{PHL}	5		200	400	ns
	10		100	200	
	15		75	150	
RESET PULSE WIDTH MINIMUM PW_R	5		100	200	ns
	10		40	80	
	15		30	60	
RESET REMOVAL TIME t_{rem}	5		150	300	ns
	10		65	125	
	15		40	75	

Note: Refer to "SCL4000B SERIES FAMILY SPECIFICATIONS" for remaining Dynamic & Static Characteristics, and, for recommended and maximum operating conditions.

DIE DRAWING
SCL4040B
80 x 78 mils

