


# UVV Series

## 5x7 mm, 3.3 Volt, LVPECL/LVDS, VCXO



Ordering Information	
Product Series	UVV 1 0 R 1 L N 00.0000 MHz
Temperature Range	1: 0°C to +70°C 2: -40°C to +85°C 6: -20°C to +70°C 8: 0°C to +50°C
Stability	0: Nominal per APR selection
Output Type	R: Complementary, Enable Z: Complementary, w/o Enable
Absolute Pull Range	1: ±50 ppm (±35 ppm typ. Stability) 2: ±100 ppm (±20 ppm typ. Stability) 5: ±80 ppm (±25 ppm typ. Stability) 8: ±25 ppm (±50 ppm typ. Stability)
Symmetry/Output Logic Type	L: 45/55% LVDS P: 45/55% PECL H: 40/60% LVDS Q: 40/60% PECL
Package/Lead Configurations	N: Leadless Ceramic (6 pads)
Frequency (customer specified)	

- Versatile VCXO to 800 MHz with good jitter (3 ps typical)
- Used in low jitter clock synthesizers and SONET applications

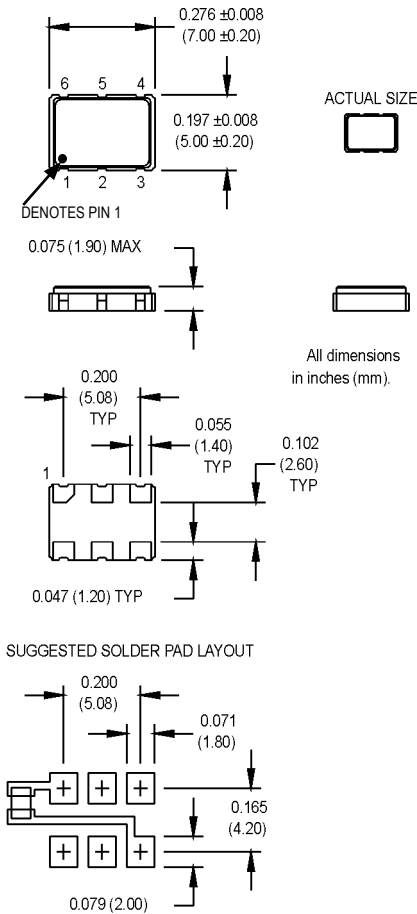

### Pin Connections

PIN	FUNCTION
1	Control Voltage
2	Enable
3	Ground
4	Output1/ Q
5	Output2/ $\bar{Q}$
6	+Vdd

PARAMETER	Symbol	Min.	Typ.	Max.	Units	Condition	
Frequency Range	F	0.75		800	MHz		
Operating Temperature	TA	(See ordering information)					
Storage Temperature	TS	-55		+125	°C		
Frequency Stability	$\Delta F/F$	(See ordering information)					
Aging						See Note 1	
1st Year		-3/-5		+3/+5	ppm	<52 MHz / ≥52 MHz	
Thereafter (per year)		-1/-2		+1/+2	ppm	<52 MHz / ≥52 MHz	
Pullability/APR		(See ordering information)					
Control Voltage	Vc	0.3	1.65	3	V	Pin 1 Voltage	
Linearity			5	15	%	Positive Monotonic Slope	
Modulation Bandwidth	f <sub>m</sub>	10			kHz	-3 dB bandwidth	
Input Impedance	Z <sub>in</sub>	50k			Ohms		
Input Voltage	V <sub>cc</sub>	3.135	3.3	3.456	V		
Input Current	I <sub>cc</sub>						
0.75 MHz to 24 MHz				70/30	mA	PECL/LVDS	
24 MHz to 96 MHz				100/60	mA	PECL/LVDS	
96 MHz to 800 MHz				110/60	mA	PECL/LVDS	
Output Type						PECL/LVDS	
Load		50 Ohms to V <sub>cc</sub> -2 VDC					See Note 3
		100 Ohms differential load					PECL waveform LVDS waveform
Symmetry (Duty Cycle) (Per Symmetry Code)		(See ordering information)					V <sub>cc</sub> -1.3 VDC (PECL) 0.5x (V <sub>max</sub> -V <sub>min</sub> ) LVDS
Output Skew				200	ps	PECL	
Differential Voltage	V <sub>o</sub>	250	340	450	mV	LVDS	
Logic "1" Level	V <sub>oh</sub>	V <sub>cc</sub> -1.02			V	PECL	
Logic "0" Level	V <sub>ol</sub>	V <sub>cc</sub> -1.63			V	PECL	
Rise/Fall Time	Tr/Tf		.35 .50	.55 1.0	ns	@ 20/80% LVPECL @ 20/80% LVDS	
Enable/Disable Logic		80% V <sub>cc</sub> min or N/C: output active 20% V <sub>cc</sub> max: output disables to high-Z				Output Option R	
Start up Time			5		ms		
Phase Jitter	φ <sub>J</sub>		3	5	ps RMS	Integrated 12 kHz - 20 MHz	
Phase Noise (Typical)						Offset from carrier	
@ 19.44 MHz		-60	-90	-112	-140	-150	dBc/Hz
@ 155.52 MHz		-60	-90	-112	-123	-120	dBc/Hz

- Stability given for deviation over temperature
- APR specification inclusive of initial tolerance, deviation over temperature, shock, vibration, supply voltage, and aging.
- PECL - See load circuit diagram #5 on page 116. LVDS - See load circuit diagram #9 on page 117.

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see [www.mtronpti.com](http://www.mtronpti.com) for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.