

TOSHIBA

TOSHIBA Original CMOS 16-Bit Microcontroller

TLCS-900/L Series

TMP93CW44

TOSHIBA CORPORATION

Semiconductor Company

Preface

Thank you very much for making use of Toshiba microcomputer LSIs.
Before use this LSI, refer the section, "Points of Note and Restrictions".
Especially, take care below cautions.

****CAUTION****

How to release the HALT mode

Usually, interrupts can release all halts status. However, the interrupts = ($\overline{\text{NMI}}$, INT0), which can release the HALT mode may not be able to do so if they are input during the period CPU is shifting to the HALT mode (for about 3 clocks of f_{FPH}) with IDLE1 or STOP mode (IDLE2/RUN are not applicable to this case). (In this case, an interrupt request is kept on hold internally.)

If another interrupt is generated after it has shifted to HALT mode completely, halt status can be released without difficulty. The priority of this interrupt is compare with that of the interrupt kept on hold internally, and the interrupt with higher priority is handled first followed by the other interrupt.

Low Voltage/Low Power

CMOS 16-Bit Microcontroller TMP93CW44DF

1. Outline and Device Characteristics

The TMP93CW44 are high speed, advanced 16-bit microcontroller developed for controlling medium to large-scale equipment.

The TMP93CW44DF are housed in 80-pin flat package (P-QFP80-1420-0.80B).

The device characteristics are as follows:

- (1) Original 16-bit CPU (900/L CPU)
 - TLCS-90 instruction mnemonic upward compatible
 - 16-Mbyte linear address space
 - General-purpose registers and register bank system
 - 16-bit multiplication/division and bit transfer/arithmetic instructions
 - Micro DMA: 4 channels (1.6 μ s per 2 bytes at 20 MHz)
- (2) Minimum instruction execution time: 200 ns at 20 MHz
- (3) Internal RAM: 4 Kbytes
Internal ROM: 128 Kbytes
- (4) External memory expansion
 - Can be expanded up to 16 Mbytes (for both programs and data)
 - $\overline{\text{AM8}}/\overline{\text{AM16}}$ pin (Select the external data bus width)
 - Can mix 8- and 16- bit external data buses (Dynamic bus sizing)
- (5) 8-bit timer: 4 channels
- (6) 16-bit timer: 2 channels
- (7) Serial interface: 2 channels

030619EBP1

• The information contained herein is subject to change without notice.

• The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.

• TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.

In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..

• The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.

• The products described in this document are subject to the foreign exchange and foreign trade laws.

• TOSHIBA products should not be embedded to the downstream products which are prohibited to be produced and sold, under any law and regulations.


• For a discussion of how the reliability of microcontrollers can be predicted, please refer to Section 1.3 of the chapter entitled Quality and Reliability Assurance/Handling Precautions.



Purchase of TOSHIBA I²C components conveys a license under the Philips I²C Patent Rights to use these components in an I²C system, provided that the system conforms to the I²C Standard Specification as defined by Philips.

- (8) Serial bus interface: 1 channel
 - I²C bus mode/clocked-synchronous 8-bit serial interface mode
- (9) 10-bit AD converter: 8 channels
- (10) High current output: 8 ports
- (11) Watchdog timer
- (12) Bus width/wait controller: 3 blocks
- (13) Interrupt functions: 33
 - 9 CPU interrupts
 - 17 internal interrupts
 - 7 external interrupts

] 7-level priority can be set (except $\overline{\text{NMI}}$ and INTWD).
- (14) I/O ports: 62 pins
- (15) Standby function
 - 4 HALT modes (RUN, IDLE2, IDLE1, STOP)
- (16) Clock gear function
 - Dual clock operation
 - High-frequency clock can be changed from f_c to $f_c/16$.
- (17) Wide range of operating voltage
 - $V_{CC} = 2.7$ to 5.5 V (The operation voltage of TMP93PW44A which is OTP product is $V_{CC} = 4.5$ to 5.5 V.)
- (18) Package
 - P-QFP80-1420-0.80B

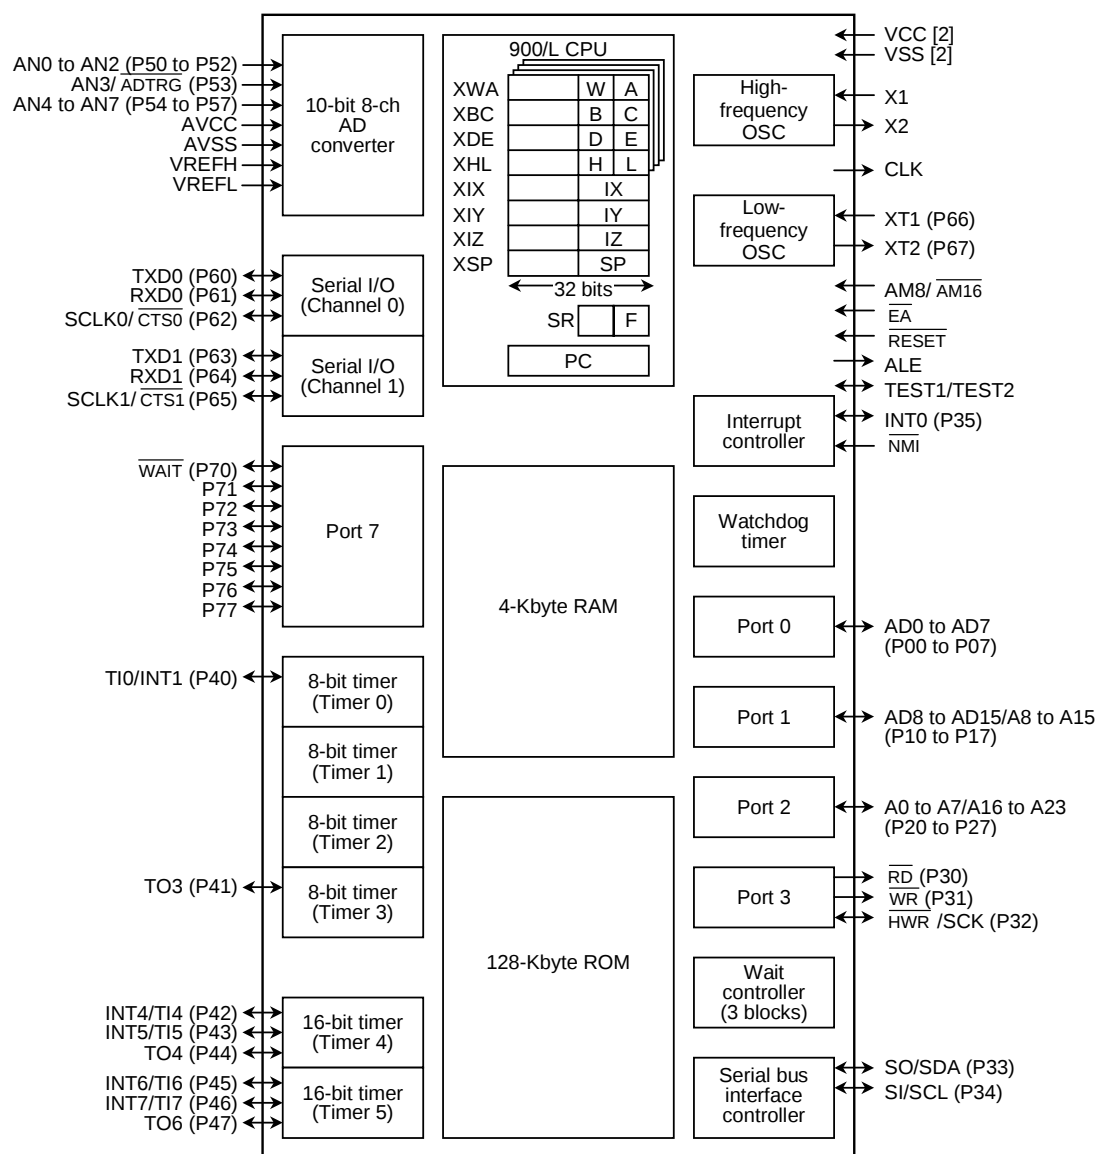

Note: The items in parentheses () are the initial setting after reset.

Figure 1.1 TMP93CW44 Block Diagram

2. Pin Assignment and Functions

The assignment of input and output pins for the TMP93CW44, their names and functions are described below.

2.1 Pin Assignment

Figure 2.1.1 shows pin assignment of the TMP93CW44DF.

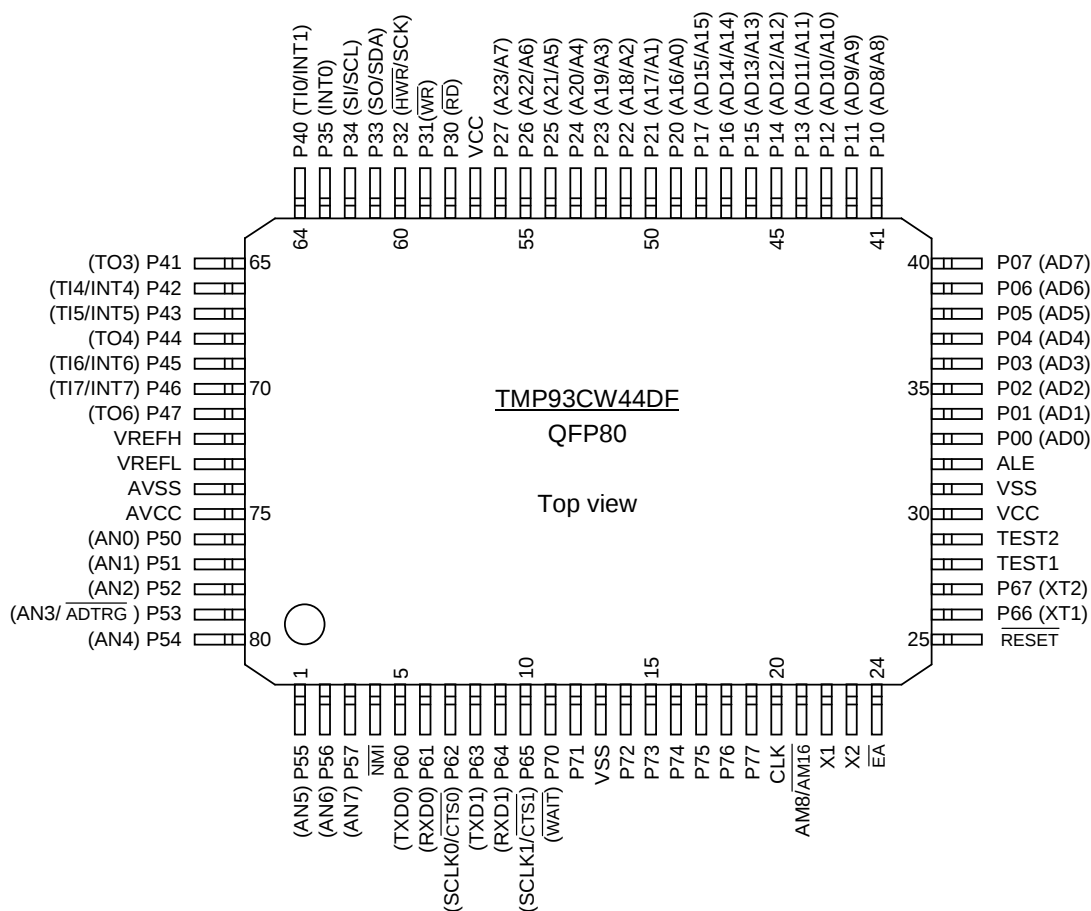


Figure 2.1.1 Pin Assignment (P-QFP80-1420-0.80B)

2.2 Pin Names and Functions

The names of input/output pins and their functions are described below.

Table 2.2.1 Pin Names and Functions (1/3)



Pin Name	Number of Pins	I/O	Functions
P00 to P07 AD0 to AD7	8	I/O	Port 0: I/O port that allows selection of I/O on a bit basis
		3-state	Address/data (Lower): Bits 0 to 7 for address/data bus
P10 to P17 AD8 to D15 A8 to A15	8	I/O	Port 1: I/O port that allows selection of I/O on a bit basis
		3-state	Address/data (Upper): Bits 8 to 15 for address/data bus
		Output	Address: Bits 8 to 15 for address bus
P20 to P27 A0 to A7 A16 to A23	8	I/O	Port 2: I/O port that allows selection of I/O on a bit basis (with pull-up resistor)
		Output	Address: Bits 0 to 7 for address bus
		Output	Address: Bits 16 to 23 for address bus
P30 RD	1	Output	Port 30: Output port
		Output	Read: Strobe signal for reading external memory
P31 WR	1	Output	Port 31: Output port
		Output	Write: Strobe signal for writing data on pins AD0 to AD7
P32 HWR SCK	1	I/O	Port 32: I/O port (with pull-up resistor)
		Output	High write: Strobe signal for writing data on pins AD8 to AD15
		I/O	Mode clock SBI SIO mode clock
P33 SO SDA	1	I/O	Port 33: I/O port
		Output	Serial send data
		I/O	SBI I ² C bus mode channel data
P34 SI SCL	1	I/O	Port 34: I/O port
		Input	Serial receive data
		I/O	SBI I ² C bus mode clock
P35 INT0	1	I/O	Port 35: I/O port
		Input	Interrupt request pin 0: Interrupt request pin with programmable level/rising edge 
P40 TI0 INT1	1	I/O	Port 40: I/O port
		Input	Timer input 0: Timer 0 input
		Input	Interrupt request pin 1: Interrupt request pin with rising edge 
P41 TO3	1	I/O	Port 41: I/O port
		Output	Timer output 3: 8-bit timer 3 output
P42 TI4 INT4	1	I/O	Port 42: I/O port
		Input	Timer input 4: Timer 4 input
		Input	Interrupt request pin 4: Interrupt request pin with programmable rising/falling edge 

Table 2.2.2 Pin Names and Functions (2/3)



Pin Name	Number of Pins	I/O	Functions
P43	1	I/O	Port 43: I/O port
T15		Input	Timer input 5: Timer 4 input
INT5		Input	Interrupt request pin 5: Interrupt request pin with rising edge 
P44	1	I/O	Port 44: I/O port
TO4		Output	Timer output 4: Timer 4 output
P45	1	I/O	Port 45: I/O port
T16		Input	Timer input 6: Timer 5 input
INT6		Input	Interrupt request pin 6: Interrupt request pin with programmable rising/falling edge 
P46	1	I/O	Port 46: I/O port
T17		Input	Timer input 7: Timer 5 input
INT7		Input	Interrupt request pin 7: Interrupt request pin with rising edge 
P47	1	I/O	Port 47: I/O port
TO6		Output	Timer output 6: Timer 5 output pin
P50 to P52, P54 to P57	7	Input	Port 50 to port 52, port 54 to port 57: Input port
AN0 to AN2, AN4 to AN7		Input	Analog input: Analog signal input for AD converter
P53	1	Input	Port 53: Input port
AN3		Input	Analog input: Analog signal input for AD converter
ADTRG		Input	AD converter external start trigger input
P60	1	I/O	Port 60: I/O port (with pull-up resistor)
TXD0		Output	Serial send data 0
P61	1	I/O	Port 61: I/O port (with pull-up resistor)
RXD0		Input	Serial receive data 0
P62	1	I/O	Port 62: I/O port (with pull-up resistor)
SCLK0		I/O	Serial Clock I/O 0
CTS0		Input	Serial data send enable 0 (Clear to send)
P63	1	I/O	Port 63: I/O port (with pull-up resistor)
TXD1		Output	Serial send data 1
P64	1	I/O	Port 64: I/O port (with pull-up resistor)
RXD1		Input	Serial receive data 1
P65	1	I/O	Port 65: I/O port (with pull-up resistor)
SCLK1		I/O	Serial clock I/O 1
CTS1		Input	Serial data send enable 1 (Clear to send)
P66	1	I/O	Port 66: I/O port (Open-drain output)
XT1		Input	Low-frequency oscillator connecting pin
P67	1	I/O	Port 67: I/O port (Open-drain output)
XT2		Output	Low-frequency oscillator connecting pin

Table 2.2.3 Pin Names and Functions (3/3)

Pin Name	Number of Pins	I/O	Functions
P70 WAIT	1	I/O	Port 70: I/O port (High current output available)
		Input	WAIT: Pin used to request CPU bus wait (It is active in (1 + N) WAIT mode. Set by the bus-width/wait control register.)
P71 to P77	7	I/O	Port 71 to port 77: I/O port (High current output available)
AVCC	1	Input	Power supply pin for AD converter
AVSS	1	Input	GND pin for AD converter (0 V)
VREFH	1	Input	Pin for high level reference voltage input to AD converter
VREFL	1	Input	Pin for low level reference voltage input to AD converter
NMI	1	Input	Non-maskable interrupt request pin: Interrupt request pin with falling edge. Can also be operated at falling and rising edges by program. 
X1	1	Input	High-frequency oscillator connecting pin
X2	1	Output	High-frequency oscillator connecting pin
RESET	1	Input	Reset: Initializes TMP93CW44 (with pull-up resistor).
ALE	1	Output	Address latch enable Can be disabled for reducing noise.
CLK	1	Output	Clock output: Outputs "f _{SYS} ÷ 2" clock. Pulled-up during reset. Can be disabled for reducing noise.
EA	1	Input	External access: "1" should be inputted with TMP93CW44.
AM8/ AM16	1	Input	Address mode: Selects external data bus width. "1" should be inputted. The data bus width for external access is set by chip select/WAIT control register, port 1 control register.
VCC	2	Input	Power supply pin (All VCC pins should be connected with GND (0 V)).
VSS	2	Input	GND pin (0 V) (All VSS pins should be connected with GND (0 V)).
TEST1 TEST2	2	Output/Input	TEST1 Should be connected with TEST2 pin. Do not connect to any other pins.

Note: Built-in pull-up resistors can be released from the pins other than the RESET pin by software.

3. Operation

This section describes the functions and basic operational blocks of TMP93CW44 devices.

3.1 CPU

TMP93CW44 devices have a built-in high-performance 16-bit CPU (900/L CPU). (For CPU operation, see TLCS-900/L CPU in the previous section.)

3.2 Memory Map

Figure 3.2.1 is a memory map of the TMP93CW44.

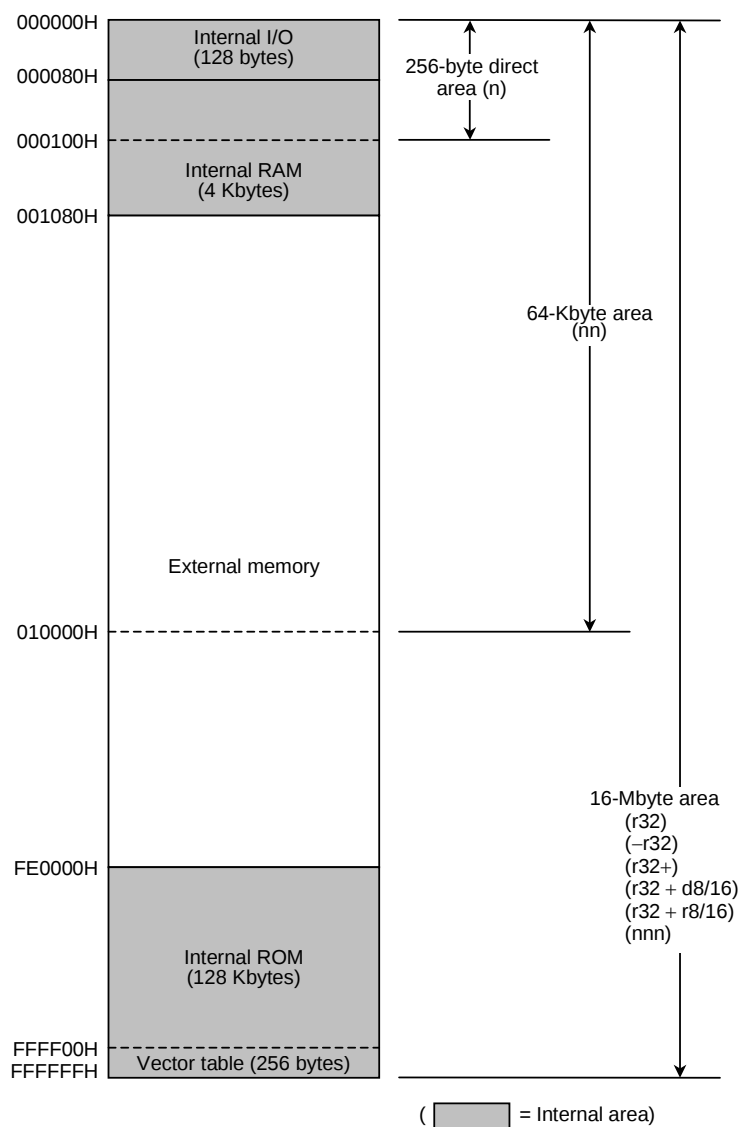


Figure 3.2.1 Memory Map

4. Electrical Characteristics

4.1 Maximum Ratings (TMP93CW44D)

"X" used in an expression shows a cycle of clock f_{PPH} selected by SYSCR1<SYSCK>. If a clock gear or a low speed oscillator is selected, a value of "X" is different. The value as an example is calculated at f_c , gear = 1/ f_c (SYSCR1<SYSCK, GEAR2:0> = "0000").

Parameter	Symbol	Rating	Unit
Power supply voltage	V_{CC}	-0.5 to 6.5	V
Input voltage	V_{IN}	-0.5 to $V_{CC} + 0.5$	
Output current (Per 1 pin) P7	I_{OL1}	20	mA
Output current (Per 1 pin) except P7	I_{OL2}	2	
Output current (P7 total)	ΣI_{OL1}	80	
Output current (Total)	ΣI_{OL}	120	
Output current (Total)	ΣI_{OH}	-80	
Power dissipation ($T_a = 85^\circ\text{C}$)	P_D	350	mW
Soldering temperature (10 s)	T_{SOLDER}	260	$^\circ\text{C}$
Storage temperature	T_{STG}	-65 to 150	
Operating temperature	T_{OPR}	-40 to 85	

Note: The maximum ratings are rated values which must not be exceeded during operation, even for an instant. Any one of the ratings must not be exceeded. If any maximum rating is exceeded, a device may break down or its performance may be degraded, causing it to catch fire or explode resulting in injury to the user. Thus, when designing products which include this device, ensure that no maximum rating value will ever be exceeded.

4.2 DC Characteristics (1/2)

$T_a = -40$ to 85°C

Parameter		Symbol	Condition		Min	Typ. (Note 1)	Max	Unit
Power supply voltage $\left(\begin{array}{l} AV_{CC} = V_{CC} \\ AV_{SS} = V_{SS} = 0\text{ V} \end{array} \right)$		V_{CC}	$f_c = 4$ to 20 MHz	$f_s = 30$ to 34 kHz	4.5		5.5	V
			$f_c = 4$ to 12.5 MHz		2.7 (Note 2)			
Input low voltage	AD0 to AD15	V_{IL}	$V_{CC} \geq 4.5\text{ V}$		-0.3		0.8	
			$V_{CC} < 4.5\text{ V}$				0.6	
	Port 2 to 7 (except P35)	V_{IL1}	$V_{CC} = 2.7$ to 5.5 V				$0.3 V_{CC}$	
	$\overline{\text{RESET}}$, $\overline{\text{NMI}}$, INT0	V_{IL2}					$0.25 V_{CC}$	
	$\overline{\text{EA}}$, AM8/ $\overline{\text{AM16}}$	V_{IL3}					0.3	
	X1	V_{IL4}					$0.2 V_{CC}$	
Input high voltage	AD0 to AD15	V_{IH}	$V_{CC} \geq 4.5\text{ V}$		2.2	$V_{CC} + 0.3$		
			$V_{CC} < 4.5\text{ V}$		2.0			
	Port 2 to 7 (except P35)	V_{IH1}	$V_{CC} = 2.7$ to 5.5 V		$0.7 V_{CC}$			
	$\overline{\text{RESET}}$, $\overline{\text{NMI}}$, INT0	V_{IH2}			$0.75 V_{CC}$			
	$\overline{\text{EA}}$, AM8/ $\overline{\text{AM16}}$	V_{IH3}			$V_{CC} - 0.3$			
	X1	V_{IH4}			$0.8 V_{CC}$			
Output low voltage		V_{OL}	$I_{OL} = 1.6\text{ mA}$ ($V_{CC} = 2.7$ to 5.5 V)			0.45		
Output low current (P7)		I_{OL7}	$V_{OL} = 1.0\text{ V}$	$(V_{CC} = 5\text{ V} \pm 10\%)$ $(V_{CC} = 3\text{ V} \pm 10\%)$	16 7			mA
Output high voltage		V_{OH1}	$I_{OH} = -400\text{ }\mu\text{A}$ ($V_{CC} = 3\text{ V} \pm 10\%$)		2.4			V
		V_{OH2}	$I_{OH} = -400\text{ }\mu\text{A}$ ($V_{CC} = 5\text{ V} \pm 10\%$)		4.2			

Note 1: Typical values are for $T_a = 25^\circ\text{C}$ and $V_{CC} = 5\text{ V}$ unless otherwise noted.

Note 2: The minimum operation voltage of TMP93PW44A is $V_{CC} = 4.5\text{ V}$.

DC Characteristics (2/2)

Parameter	Symbol	Condition	Min	Typ. (Note 1)	Max	Unit	
Darlington drive current (8 output pins max)	I _{DAR} (Note 2)	V _{EXT} = 1.5 V R _{EXT} = 1.1 kΩ (V _{CC} = 5 V ± 10% only)	−1.0		−3.5	mA	
Input leakage current	I _{LI}	0.0 ≤ V _{IN} ≤ V _{CC}		0.02	±5	μA	
Output leakage current	I _{LO}	0.2 ≤ V _{IN} ≤ V _{CC} − 0.2		0.05	±10		
Power down voltage (at STOP, RAM backup)	V _{STOP}	V _{IL2} = 0.2V _{CC} , V _{IH2} = 0.8V _{CC}	2.0		6.0	V	
$\overline{\text{RESET}}$ pull-up resistance	R _{RST}	V _{CC} = 5.5 V	45		130	kΩ	
		V _{CC} = 4.5 V	50		160		
		V _{CC} = 3.3 V	70		280		
		V _{CC} = 2.7 V	90		400		
Pin capacitance	C _{IO}	fc = 1 MHz			10	pF	
Schmitt width $\overline{\text{RESET}}$, $\overline{\text{NMI}}$, INT0	V _{TH}		0.4	1.0		V	
Programmable pull-up resistance	R _{KH}	V _{CC} = 5.5 V	45		130	kΩ	
		V _{CC} = 4.5 V	50		160		
		V _{CC} = 3.3 V	70		280		
		V _{CC} = 2.7 V	90		400		
NORMAL (Note 3)	I _{CC}	V _{CC} = 5 V ± 10% fc = 20 MHz		21	28	mA	
RUN				17	25		
IDLE2				12.5	17		
IDLE1				2.5	4		
NORMAL (Note 3)		V _{CC} = 3 V ± 10% fc = 12.5 MHz (Typ: V _{CC} = 3.0 V)		7	10		
RUN				5.5	9		
IDLE2				4.5	6		
IDLE1				0.7	1		
SLOW (Note 3)		V _{CC} = 3 V ± 10% fs = 32.768 kHz (Typ: V _{CC} = 3.0 V)		20	35	μA	
RUN				16	30		
IDLE2				11	25		
IDLE1				4	15		
STOP		Ta ≤ 50°C	V _{CC} = 2.7 V to 5.5 V		0.2		10
		Ta ≤ 70°C					20
		Ta ≤ 85°C					50


Note 1: Typical values are for $T_a = 25^\circ\text{C}$ and $V_{CC} = 5\text{ V}$ unless otherwise noted.

Note 2: I_{DAR} is guaranteed for total of up to 8 ports.

Note 3: I_{CC} measurement conditions (NORMAL, SLOW).

Only CPU is operational; output pins are open and input pins are fixed.

(Reference) Definition of I_{DAR}



4.3 AC Characteristics

(1) $V_{CC} = 5\text{ V} \pm 10\%$

No.	Parameter	Symbol	Variable		16 MHz		20 MHz		Unit
			Min	Max	Min	Max	Min	Max	
1	Osc. period (= X)	t_{OSC}	50	31250	62.5		50		ns
2	CLK pulse width	t_{CLK}	$2X - 40$		85		60		ns
3	A0 to A23 valid $\rightarrow$ CLK hold	t_{AK}	$0.5X - 20$		11		5		ns
4	CLK valid $\rightarrow$ A0 to A23 hold	t_{KA}	$1.5X - 70$		24		5		ns
5	A0 to A15 valid $\rightarrow$ ALE fall	t_{AL}	$0.5X - 15$		16		10		ns
6	ALE fall $\rightarrow$ A0 to A15 hold	t_{LA}	$0.5X - 20$		11		5		ns
7	ALE high pulse width	t_{LL}	$X - 40$		23		10		ns
8	ALE fall $\rightarrow$ $\overline{RD}$ / $\overline{WR}$ fall	t_{LC}	$0.5X - 25$		6		0		ns
9	$\overline{RD}$ / $\overline{WR}$ rise $\rightarrow$ ALE rise	t_{CL}	$0.5X - 20$		11		5		ns
10	A0 to A15 valid $\rightarrow$ $\overline{RD}$ / $\overline{WR}$ fall	t_{ACL}	$X - 25$		38		25		ns
11	A0 to A23 valid $\rightarrow$ $\overline{RD}$ / $\overline{WR}$ fall	t_{ACH}	$1.5X - 50$		44		25		ns
12	$\overline{RD}$ / $\overline{WR}$ rise $\rightarrow$ A0 to A23 hold	t_{CA}	$0.5X - 25$		6		0		ns
13	A0 to A15 valid $\rightarrow$ D0 to D15 input	t_{ADL}		$3.0X - 55$		133		95	ns
14	A0 to A23 valid $\rightarrow$ D0 to D15 input	t_{ADH}		$3.5X - 65$		154		110	ns
15	$\overline{RD}$ fall $\rightarrow$ D0 to D15 input	t_{RD}		$2.0X - 60$		65		40	ns
16	$\overline{RD}$ low pulse width	t_{RR}	$2.0X - 40$		85		60		ns
17	$\overline{RD}$ rise $\rightarrow$ D0 to D15 hold	t_{HR}	0		0		0		ns
18	$\overline{RD}$ rise $\rightarrow$ A0 to A15 output	t_{RAE}	$X - 15$		48		35		ns
19	$\overline{WR}$ low pulse width	t_{WW}	$2.0X - 40$		85		60		ns
20	D0 to D15 valid $\rightarrow$ $\overline{WR}$ rise	t_{DW}	$2.0X - 55$		70		45		ns
21	$\overline{WR}$ rise $\rightarrow$ D0 to D15 hold	t_{WD}	$0.5X - 15$		16		10		ns
22	A0 to A23 valid $\rightarrow$ $\overline{WAIT}$ input $\left(\begin{smallmatrix} (1+N) \text{ WAIT} \\ \text{mode} \end{smallmatrix} \right)$	t_{AWH}		$3.5X - 90$		129		85	ns
23	A0 to A15 valid $\rightarrow$ $\overline{WAIT}$ input $\left(\begin{smallmatrix} (1+N) \text{ WAIT} \\ \text{mode} \end{smallmatrix} \right)$	t_{AWL}		$3.0X - 80$		108		70	ns
24	$\overline{RD}$ / $\overline{WR}$ fall $\rightarrow$ $\overline{WAIT}$ hold $\left(\begin{smallmatrix} (1+N) \text{ WAIT} \\ \text{mode} \end{smallmatrix} \right)$	t_{CW}	$2.0X + 0$		125		100		ns
25	A0 to A23 valid $\rightarrow$ Port input	t_{APH}		$2.5X - 120$		36		5	ns
26	A0 to A23 valid $\rightarrow$ Port hold	t_{APH2}	$2.5X + 50$		206		175		ns
27	$\overline{WR}$ rise $\rightarrow$ Port valid	t_{CP}		200		200		200	ns

AC measuring conditions

- Output level: High 2.2 V/Low 0.8 V, $CL = 50\text{ pF}$
(However $CL = 100\text{ pF}$ for AD0 to AD15, A0 to A23, ALE, $\overline{RD}$, $\overline{WR}$, $\overline{HWR}$, CLK)
- Input level: High 2.4 V/Low 0.45 V (AD0 to AD15)
High $0.8 \times V_{CC}$ /Low $0.2 \times V_{CC}$ (except for AD0 to AD15)


(2) $V_{CC} = 3\text{ V} \pm 10\%$

No.	Parameter	Symbol	Variable		12.5 MHz		Unit
			Min	Max	Min	Max	
1	Osc. period (= X)	t_{OSC}	80	31250	80		ns
2	CLK pulse width	t_{CLK}	$2X - 40$		120		ns
3	A0 to A23 valid $\rightarrow$ CLK hold	t_{AK}	$0.5X - 30$		10		ns
4	CLK valid $\rightarrow$ A0 to A23 hold	t_{KA}	$1.5X - 80$		40		ns
5	A0 to A15 valid $\rightarrow$ ALE fall	t_{AL}	$0.5X - 35$		5		ns
6	ALE fall $\rightarrow$ A0 to A15 hold	t_{LA}	$0.5X - 35$		5		ns
7	ALE high pulse width	t_{LL}	$X - 60$		20		ns
8	ALE fall $\rightarrow$ $\overline{RD}$ / $\overline{WR}$ fall	t_{LC}	$0.5X - 35$		5		ns
9	$\overline{RD}$ / $\overline{WR}$ rise $\rightarrow$ ALE rise	t_{CL}	$0.5X - 40$		0		ns
10	A0 to A15 valid $\rightarrow$ $\overline{RD}$ / $\overline{WR}$ fall	t_{ACL}	$X - 50$		30		ns
11	A0 to A23 valid $\rightarrow$ $\overline{RD}$ / $\overline{WR}$ fall	t_{ACH}	$1.5X - 50$		70		ns
12	$\overline{RD}$ / $\overline{WR}$ rise $\rightarrow$ A0 to A23 hold	t_{CA}	$0.5X - 40$		0		ns
13	A0 to A15 valid $\rightarrow$ D0 to D15 input	t_{ADL}		$3.0X - 110$		130	ns
14	A0 to A23 valid $\rightarrow$ D0 to D15 input	t_{ADH}		$3.5X - 125$		155	ns
15	$\overline{RD}$ fall $\rightarrow$ D0 to D15 input	t_{RD}		$2.0X - 115$		45	ns
16	$\overline{RD}$ low pulse width	t_{RR}	$2.0X - 40$		120		ns
17	$\overline{RD}$ rise $\rightarrow$ D0 to D15 hold	t_{HR}	0		0		ns
18	$\overline{RD}$ fall $\rightarrow$ A0 to A15 output	t_{RAE}	$X - 25$		55		ns
19	$\overline{WR}$ low pulse width	t_{WW}	$2.0X - 40$		120		ns
20	D0 to D15 valid $\rightarrow$ $\overline{WR}$ rise	t_{DW}	$2.0X - 120$		40		ns
21	$\overline{WR}$ rise $\rightarrow$ D0 to D15 hold	t_{WD}	$0.5X - 40$		0		ns
22	A0 to A23 valid $\rightarrow$ $\overline{WAIT}$ input $\left(\begin{smallmatrix} (1+N) \text{ WAIT} \\ \text{mode} \end{smallmatrix} \right)$	t_{AWH}		$3.5X - 130$		150	ns
23	A0 to A15 valid $\rightarrow$ $\overline{WAIT}$ input $\left(\begin{smallmatrix} (1+N) \text{ WAIT} \\ \text{mode} \end{smallmatrix} \right)$	t_{AWL}		$3.0X - 100$		140	ns
24	$\overline{RD}$ / $\overline{WR}$ fall $\rightarrow$ $\overline{WAIT}$ hold $\left(\begin{smallmatrix} (1+N) \text{ WAIT} \\ \text{mode} \end{smallmatrix} \right)$	t_{CW}	$2.0X + 0$		160		ns
25	A0 to A23 valid $\rightarrow$ Port input	t_{APH}		$2.5X - 195$		5	ns
26	A0 to A23 valid $\rightarrow$ Port hold	t_{APH2}	$2.5X + 50$		250		ns
27	$\overline{WR}$ rise $\rightarrow$ Port valid	t_{CP}		200		200	ns

AC measuring conditions


- Output level: High $0.7 \times V_{CC}$ / Low $0.3 \times V_{CC}$, CL = 50 pF
- Input level: High $0.9 \times V_{CC}$ / Low $0.1 \times V_{CC}$

(3) Read cycle

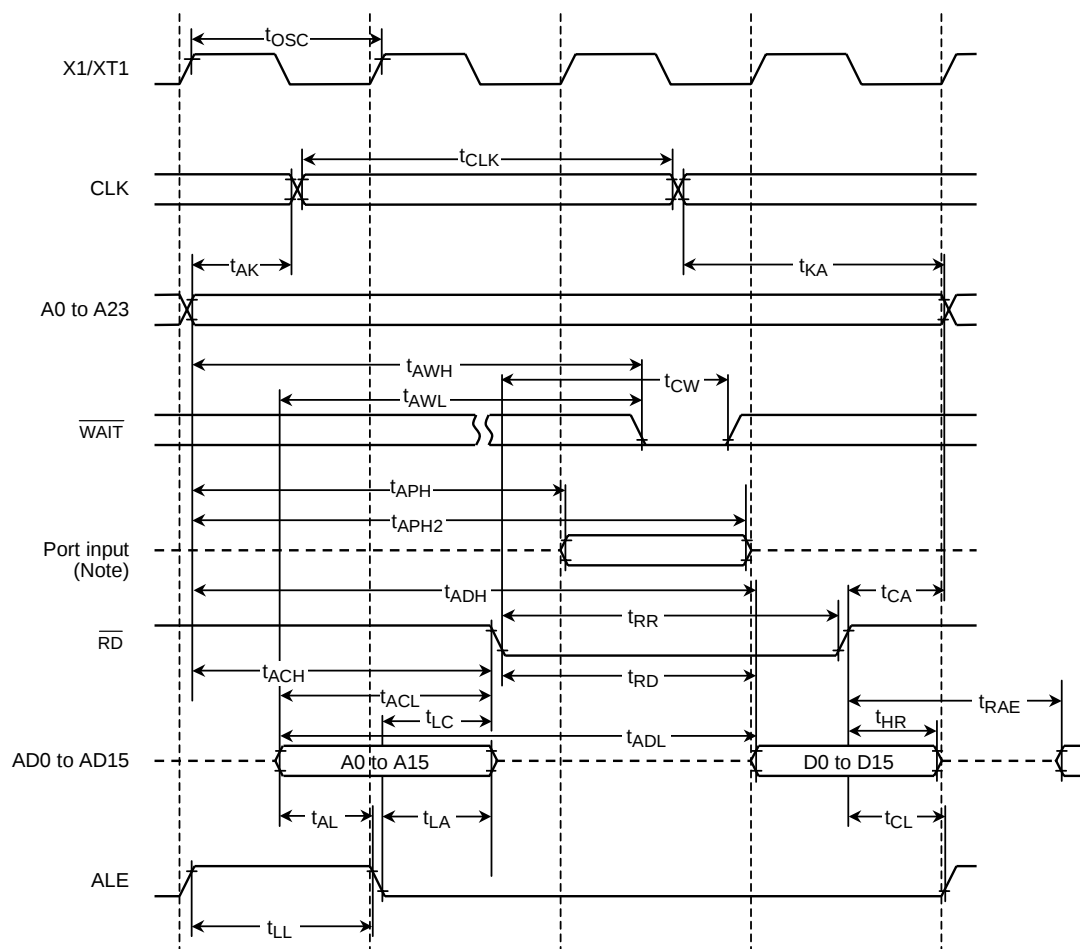

Note: Since the CPU accesses the internal area to read data from a port, the control signals of external pins such as $\overline{RD}$ and $\overline{CS}$ are not enabled. Therefore, the above waveform diagram should be regarded as depicting internal operation. Please also note that the timing and AC characteristics of port input/output shown above are typical representation. For details, contact your local Toshiba sales representative.

(4) Write cycle

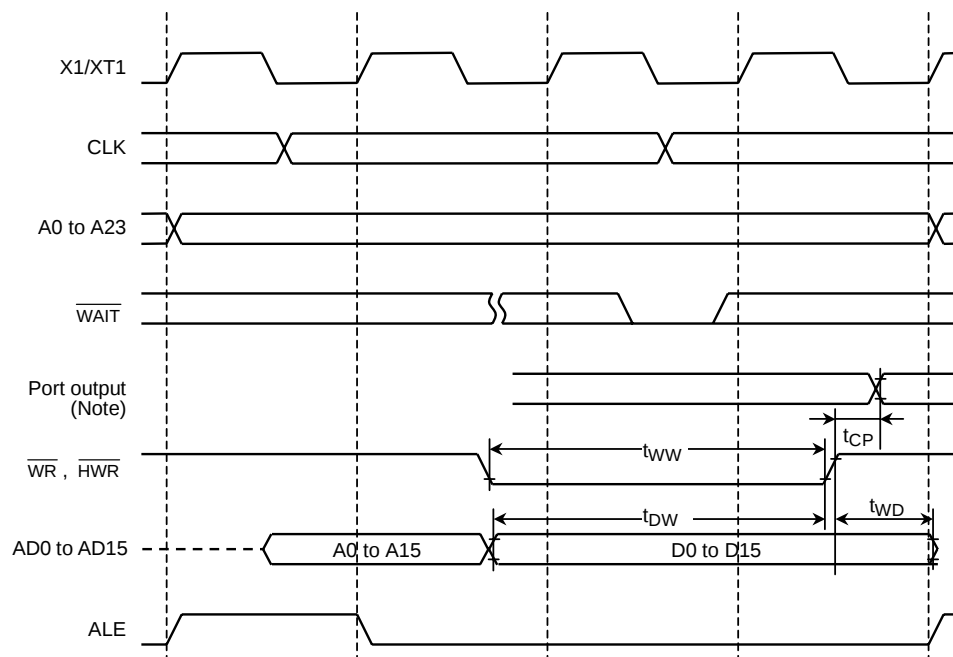

Note: Since the CPU accesses the internal area to write data to a port, the control signals of external pins such as $\overline{WR}$ and $\overline{CS}$ are not enabled. Therefore, the above waveform diagram should be regarded as depicting internal operation. Please also note that the timing and AC characteristics of port input/output shown above are typical representation. For details, contact your local Toshiba sales representative.

4.4 Serial Channel Timing

(1) I/O interface mode

1. SCLK input mode

Parameter	Symbol	Variable		32.768 MHz (Note)		12.5 MHz		20 MHz		Unit
		Min	Max	Min	Max	Min	Max	Min	Max	
SCLK cycle	t_{SCY}	16X		488 μ s		1.28 μ s		0.8 μ s		ns
Output Data → Falling edge of SCLK	t_{OSS}	$t_{SCY}/2 - 5X - 50$		91.5 μ s		190		100		ns
SCLK rising/falling edge → Output data hold	t_{OHS}	5X - 100		152 μ s		300		150		ns
SCLK rising/falling edge → Input data hold	t_{HSR}	0		0		0		0		ns
SCLK rising/falling edge → Effective data input	t_{SRD}		$t_{SCY} - 5X - 100$		336 μ s		780		450	ns


Note 1: When f_s is used as system clock or f_s divided by 4 is used as input clock to prescaler.

Note 2: SCLK rising/falling timing; SCLK rising in the rising mode of SCLK, SCLK falling in the falling mode of SCLK.

2. SCLK output mode

Parameter	Symbol	Variable		32.768 MHz (Note)		12.5 MHz		20 MHz		Unit
		Min	Max	Min	Max	Min	Max	Min	Max	
SCLK cycle (Programmable)	t_{SCY}	16X	8192X	488 μ s	250 ms	1.28 μ s	655.36 μ s	0.8 μ s	409.6 μ s	ns
Output data → SCLK rising edge	t_{OSS}	$t_{SCY} - 2X - 150$		427 μ s		970		550		ns
SCLK rising edge → Output data hold	t_{OHS}	2X - 80		60 μ s		80		20		ns
SCLK rising edge → Input data hold	t_{HSR}	0		0		0		0		ns
SCLK rising edge → Effective data input	t_{SRD}		$t_{SCY} - 2X - 150$		428 μ s		970		550	ns

Note: When f_s is used as system clock or f_s divided by 4 is used as input clock to prescaler.

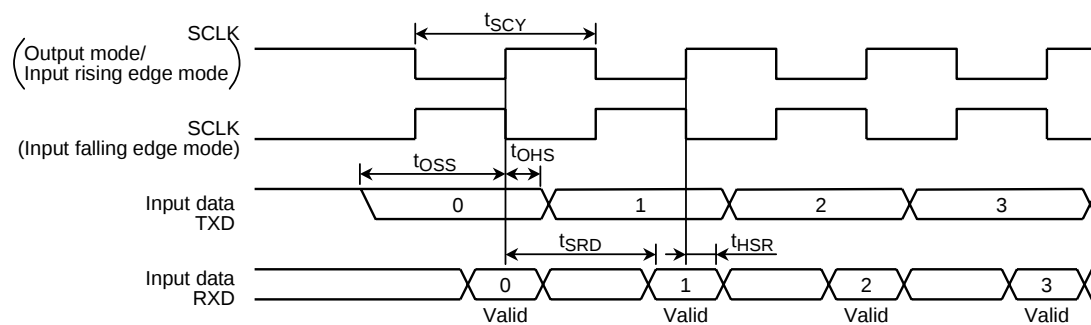

(2) UART mode (SCLK0 and SCLK1 are external input)

Parameter	Symbol	Variable		32.768 MHz (Note)		12.5 MHz		20 MHz		Unit
		Min	Max	Min	Max	Min	Max	Min	Max	
SCLK cycle	t_{SCY}	$4X + 20$		122 μ s		340		220		ns
SCLK low level pulse width	t_{SCYL}	$2X + 5$		6 μ s		165		105		ns
SCLK high level pulse width	t_{SCYH}	$2X + 5$		6 μ s		165		105		ns

Note: When f_s is used as system clock or f_s divided by 4 is used as input clock to prescaler.

4.5 AD Conversion Characteristics

$$AV_{CC} = V_{CC}, AV_{SS} = V_{SS}$$

Parameter	Symbol	Power Supply	Min	Typ.	Max	Unit
Analog reference voltage (+)	V_{REFH}	$V_{CC} = 5\text{ V} \pm 10\%$	$V_{CC} - 0.2\text{ V}$	V_{CC}	V_{CC}	V
		$V_{CC} = 3\text{ V} \pm 10\%$	$V_{CC} - 0.2\text{ V}$	V_{CC}	V_{CC}	
Analog reference voltage (-)	V_{REFL}	$V_{CC} = 5\text{ V} \pm 10\%$	V_{SS}	V_{SS}	$V_{SS} + 0.2\text{ V}$	
		$V_{CC} = 3\text{ V} \pm 10\%$	V_{SS}	V_{SS}	$V_{SS} + 0.2\text{ V}$	
Analog input voltage range	V_{AIN}		V_{REFL}		V_{REFH}	
Analog current for analog reference voltage <VREFON> = 1	I_{REF} ($V_{REFL} = 0\text{ V}$)	$V_{CC} = 5\text{ V} \pm 10\%$		0.5	1.5	mA
		$V_{CC} = 3\text{ V} \pm 10\%$		0.3	0.9	
<VREFON> = 0		$V_{CC} = 2.7\text{ to }5.5\text{ V}$		0.02	5.0	μA
Error (except quantization errors)	-	$V_{CC} = 5\text{ V} \pm 10\%$		± 1.0	± 3.0	LSB
		$V_{CC} = 3\text{ V} \pm 10\%$		± 1.0	± 5.0	

Note 1: $1\text{LSB} = (V_{REFH} - V_{REFL})/2^{10}$ [V]

Note 2: The operation above is guaranteed for $f_{FPH} \geq 4\text{ MHz}$.

Note 3: The value I_{CC} includes the current which flows through the AVCC pin.

4.6 Event Counter Input Clock (External input clock: TI0, TI4, TI5, TI6, TI7)

Parameter	Symbol	Variable		12.5 MHz		20 MHz		Unit
		Min	Max	Min	Max	Min	Max	
Clock cycle	t_{VCK}	$8X + 100$		740		500		ns
Low level clock pulse width	t_{VCKL}	$4X + 40$		360		240		ns
High level clock pulse width	t_{VCKH}	$4X + 40$		360		240		ns

4.7 Interrupt and Capture Operation

(1) $\overline{\text{NMI}}$, INT0 interrupts

Parameter	Symbol	Variable		12.5 MHz		20 MHz		Unit
		Min	Max	Min	Max	Min	Max	
$\overline{\text{NMI}}$, INT0 low level pulse width	t_{INTAL}	$4X$		320		200		ns
$\overline{\text{NMI}}$, INT0 high level pulse width	t_{INTAH}	$4X$		320		200		ns

(2) INT1, INT4 to INT7 interrupts and capture


Parameter	Symbol	Variable		12.5 MHz		20 MHz		Unit
		Min	Max	Min	Max	Min	Max	
INT1, INT4 to INT7 low level pulse width	t_{INTBL}	$4X + 100$		420		300		ns
INT1, INT4 to INT7 high level pulse width	t_{INTBH}	$4X + 100$		420		300		ns

4.8 Serial Bus Interface Timing

(1) I²C bus mode

Parameter	Symbol	Variable			Unit
		Min	Typ.	Max	
START command → SDA fall	t_{GSTA}	3X			ns
Hold time START condition	$t_{HD:STA}$	2 ⁿ X			ns
SCL low level pulse width	t_{LOW}	2 ⁿ X			ns
SCL high level pulse width	t_{HIGH}	2 ⁿ X + 12X			ns
Data hold time (Input)	$t_{HD:IDAT}$	0			ns
Data setup time (Input)	$t_{SU:IDAT}$	250			ns
Data hold time (Output)	$t_{HD:ODAT}$	7X		11X	ns
Data output → SCL rising edge	t_{ODAT}		2 ⁿ X - $t_{HD:ODAT}$		ns
STOP command → SDA fall	t_{FSDA}	3X			ns
SDA falling edge → SCL rising edge	t_{FDRC}	2 ⁿ X			ns
Setup time STOP condition	$t_{SU:STO}$	2 ⁿ X + 16X			ns

Note: “n” value is set by SBICR1<SCK2:0>

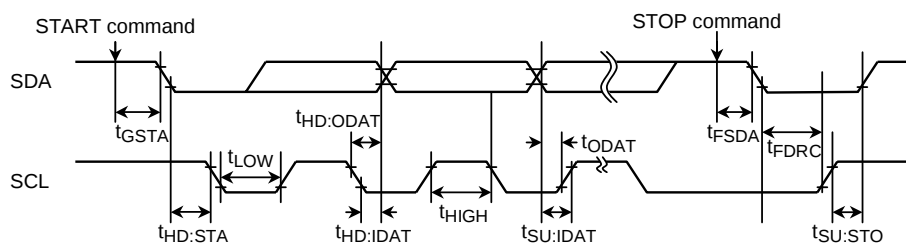


(2) Clocked-synchronous 8-bit SIO mode

1. SCK input mode

Parameter	Symbol	Variable		Unit
		Min	Max	
SCK cycle	t_{SCY2}	2^5X		ns
SCK falling edge → Output data hold	t_{OHS2}	$6X$		ns
Output data → SCK rising edge	t_{OSS2}	$t_{SCY2} - 6X$		ns
SCK rising edge → Input data hold	t_{HSR2}	$6X$		ns
Input data → SCK rising edge	t_{ISS2}	0		ns

2. SCK output mode

Parameter	Symbol	Variable		Unit
		Min	Max	
SCK cycle	t_{SCY2}	2^5X	$2^{11}X$	ns
SCK falling edge → Output data hold	t_{OHS2}	$2X$		ns
Output data → SCK rising edge	t_{OSS2}	$t_{SCY2} - 2X$		ns
SCK rising edge → Input data hold	t_{HSR2}	$2X$		ns
Input data → SCK rising edge	t_{ISS2}	0		ns

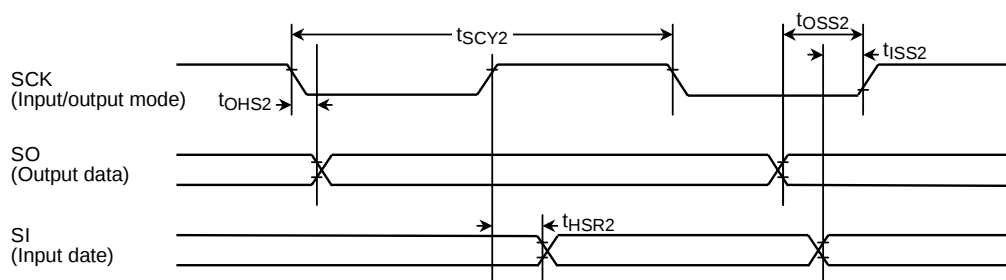

5. Package Dimensions

P-QFP80-1420-0.80B

Unit: mm

