



**SEMICELL CAL-DIODE**

## SKCD 11 C 120 I3

$I_F = 15\text{ A}$

$V_{RRM} = 1200\text{ V}$

Size: 3,35 mm X 3,35 mm

Package: wafer frame

### Features

- 600V, 1200V and 1700V
- low forward voltage drop
- easy paralleling due to a small forward voltage spread
- low temperature dependence
- very soft recovery behavior
- small switching losses
- high ruggedness
- compatible to thick wire bonding
- compatible to all standard solder processes

### Typical Applications

- freewheeling diode for IGBT
- optimal at frequencies > 8 kHz


Absolute Maximum Ratings			
Symbol	Conditions	Values	Units
$V_{RRM}$	$T_{vj} = 25\text{ °C}, I_R = 0,1\text{ mA}$	1200	V
$I_{F(AV)}$	$T_h = 80\text{ °C}, T_{vjmax} = 150\text{ °C}$	10	A
$I_{FSM}$	$T_{vj} = 25\text{ °C}, 10\text{ ms, half sine wave}$	110	A
	$T_{vj} = 150\text{ °C}, 10\text{ ms, half sine wave}$		A
$T_{vjmax}$		+ 150	°C


Electrical Characteristics					
Symbol	Conditions	min.	typ.	max.	Units
$I^2t$	$T_{vjmax}, 10\text{ ms, half sine wave}$				A <sup>2</sup> s
$I_R$	$T_{vj} = 25\text{ °C}, V_{RRM}$			0,1	mA
	$T_{vj} = 125\text{ °C}, V_{RRM}$				mA
$V_F$	$T_{vj} = 25\text{ °C}, I_F = 10\text{ A}$		2	2,5	V
	$T_{vj} = 125\text{ °C}, I_F = 10\text{ A}$		1,79	2,3	V
$V_{(TO)}$	$T_{vj} = 125\text{ °C}$		1,18		V
$r_T$	$T_{vj} = 125\text{ °C}$		62,7		mΩ

Dynamic Characteristics					
Symbol	Conditions	min.	typ.	max.	Units
$t_{rr}$	$T_{vj} = \text{°C}, , V, A/\mu\text{s}$				ns
	$T_{vj} = \text{°C}, , V, A/\mu\text{s}$				ns
$Q_{rr}$	$T_{vj} = \text{°C}, A, V, A/\mu\text{s}$				μC
	$T_{vj} = \text{°C}, A, V, A/\mu\text{s}$				μC
$I_{rrm}$	$T_{vj} = \text{°C}, A, V, A/\mu\text{s}$				A
	$T_{vj} = \text{°C}, A, V, A/\mu\text{s}$				A

Thermal Characteristics					
Symbol	Conditions	min.	typ.	max.	Units
$T_{vj}$		- 40		+ 150	°C
$T_{stg}$		- 40		+ 150	°C
$T_{solder}$	10 min			+ 250	°C
$T_{solder}$	5 min			+ 320	°C
$R_{th(j-h)}$	soldered on 0,38 mm DCB, reference point on copper heatsink close to the chip.		1,93		K / W

Mechanical Characteristics		
Parameter		Units
raster size	3,35 x 3,35	mm
Area total	11,22	mm <sup>2</sup>
Chips / wafer	932	pcs
Anode metallisation	bondable (Al)	
Cathode metallisation	solderable (Ag / Ni)	
wire bond	Al, diameter ≤ 500 μm	

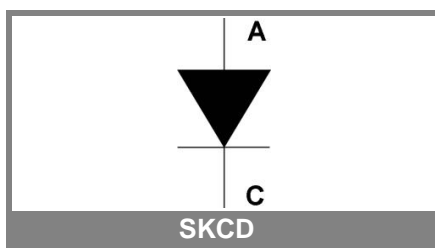

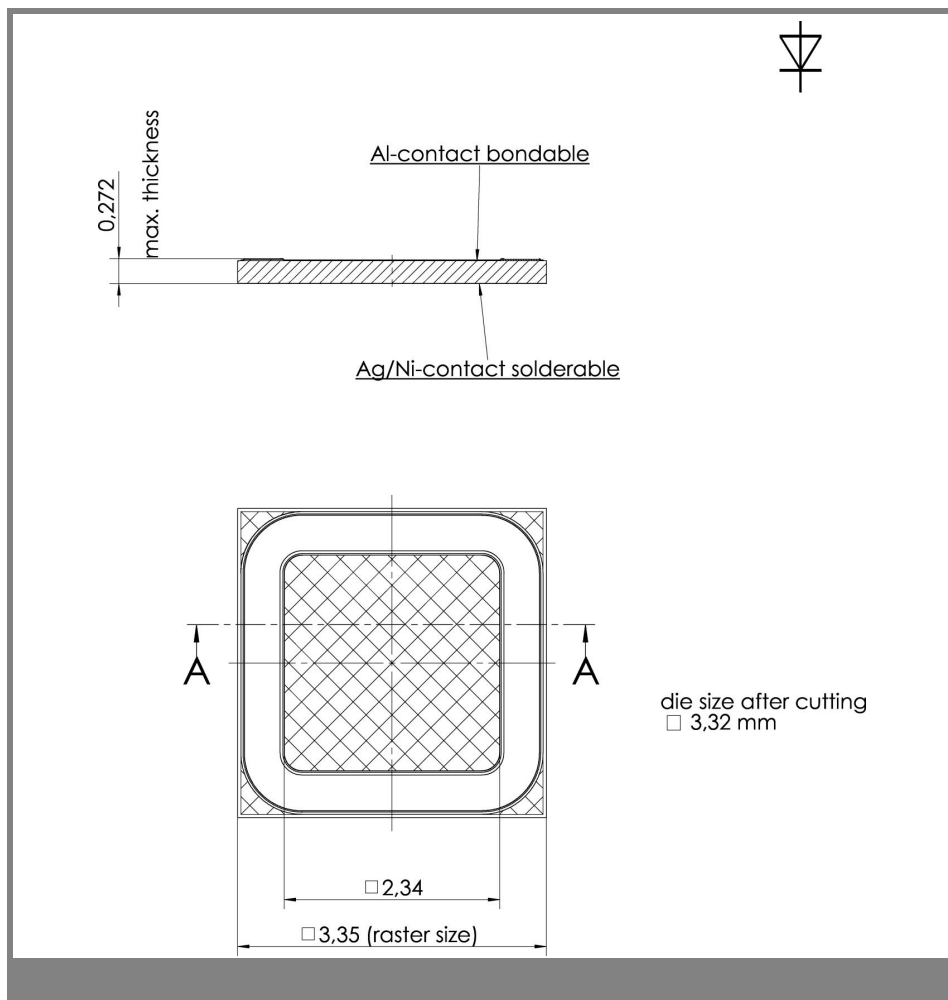

This technical information specifies semiconductor devices. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.