




**Reliability Delivered On Time**

P/N:SL22 5R006

**Mechanical Specifications**

D	20.0±1.0 mm
T	5.0±0.2 mm
Lead Diameter	1.0±0.1mm
S	7.8 ±2.0mm
L	38.0±9.0 mm
Straight Leads Coating run down	5.0±1.0mm
B	9.35±0.85mm
C	2.64±1.0mm

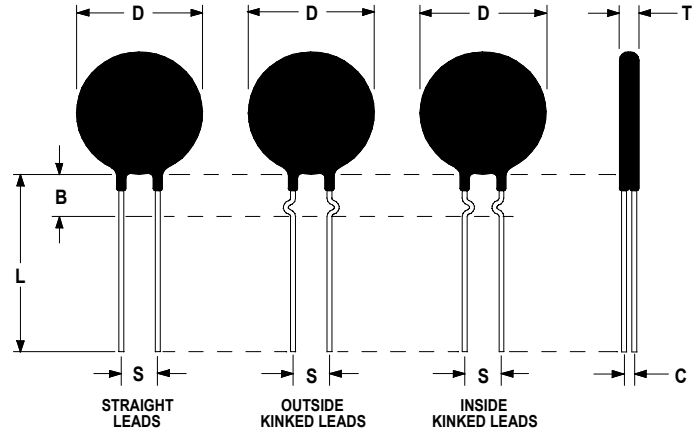

**Electrical Specifications**

Resistance @ 25°C	5.0Ω ± 20%
Max Steady State Current Up to 65°C	6.0 A
Max recommended energy rating (Joules)	50.0 J
Actual failure point of instantaneous energy (Joules)	200.0J
Maximum Capacitance @ 265VAC	1400µF
Resistance @ 100% of Max Current	0.102 Ω
Resistance @ 50% of Max Current	0.220 Ω
Body Temperature @ 100% Current rating	165°C
Dissipation Constant	32.4mW/°C
Thermal Time Constant	94seconds
Material Type	“G”

**Ametherm, Inc**  
 3111 N. Deer Run Road Bldg. 4  
 Carson City, NV 89701  
 Telephone: **800-808-2434**  
 Fax: 702 884-0670  
[www.Ametherm.com](http://www.Ametherm.com)

**Reliability Delivered On Time**