


● Features :

1. 0.36 inch (9.10mm) Digit Height.
2. Continuous uniform segments.
3. Low power requirement.
4. Excellent characters appearance.
5. Solid state reliability.
6. Categorized for luminous intensity.
7. Multiplex drive common anode.

● Description :

1. The BX-M326RD is a 9.10mm (0.36") high six digit seven segment display.
2. This product use super red chips, which are made from AlGaAs on GaAs substrate.
3. This product have a black face and white segments.
4. This product doesn't contain restriction substance, comply ROHS standard.


● Package Dimensions :

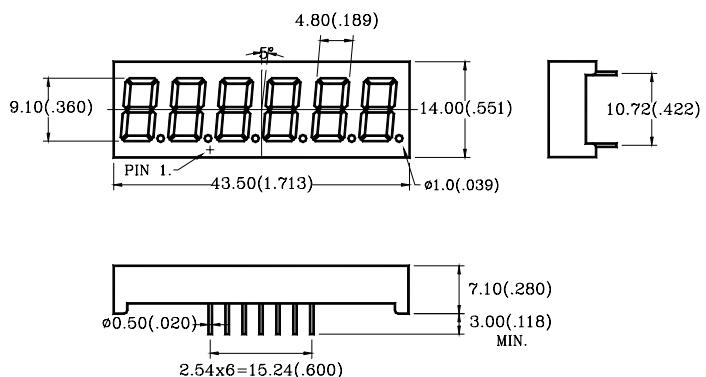

Notes:

1. All dimensions are in millimeters(inches).
2. Tolerance is $\pm 0.25\text{mm} (.01")$ unless otherwise specified.
3. Specifications are subject to change without notice.

● Internal Circuit Diagram :

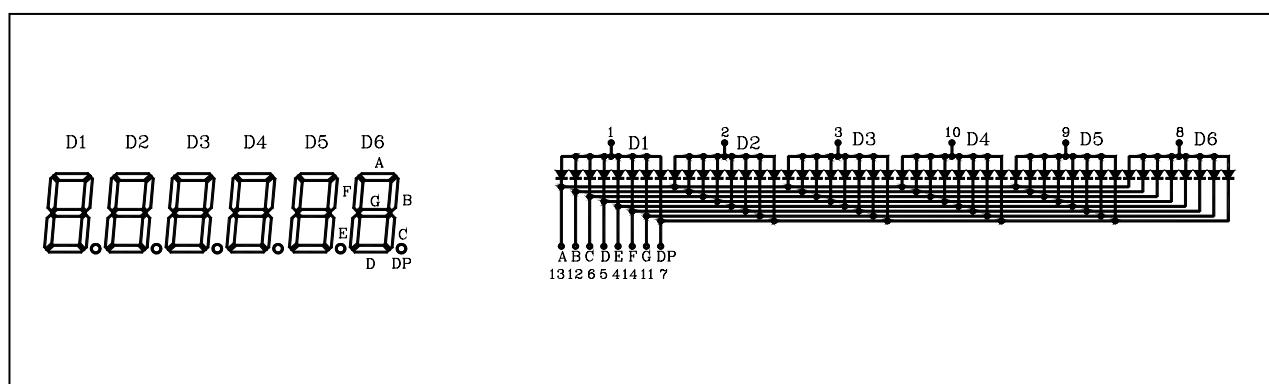

● Absolute Maximum Ratings(Ta=25°C)

| Parameter | Symbol | Rating | Unit |
|---|------------------|---------------------|------|
| Power Dissipation Per Segment | Pd | 80 | mW |
| Forward Current Per Segment | I _F | 30 | mA |
| Peak Forward Current Per Segment (Duty 1/10, 1KHZ) | I _{FP} | 150 | mA |
| Reverse Voltage Per Segment | V _R | 5 | V |
| Operating Temperature | T _{opr} | -40°C~80°C | - |
| Storage Temperature | T _{stg} | -40°C~85°C | - |
| Soldering Temperature (1/16" From Body) | T _{sol} | 260°C For 5 Seconds | - |

● Electrical And Optical Characteristics(Ta=25°C)

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|--------------------------------|----------------|----------------------|------|------|------|------|
| Forward Voltage Per Segment | V _f | I _F =10mA | - | 1.7 | 2.5 | V |
| Luminous Intensity Per Segment | I _v | I _F =10mA | - | 6.0 | - | mcd |
| Reverse Current Per Segment | I _R | V _R =5V | - | - | 100 | μA |
| Peak Wave Length | λ _p | I _F =10mA | - | 660 | - | nm |
| Dominant Wave Length | λ _d | I _F =10mA | 638 | - | 648 | nm |
| Spectral Line Half-width | Δλ | I _F =10mA | - | 20 | - | nm |

● Typical Electro-Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

Fig.1 Relative Radian Intensity VS. Wavelength

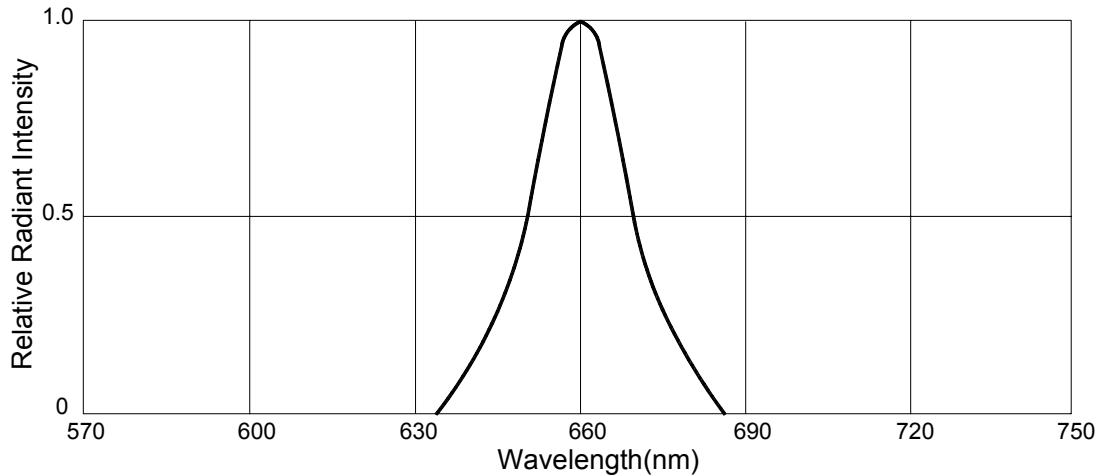


Fig.2 Forward Current VS.
Forward Voltage

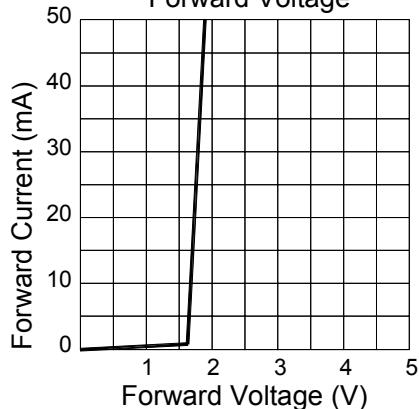


Fig.3 Relative Luminous
Intensity VS.
Ambient Temperature

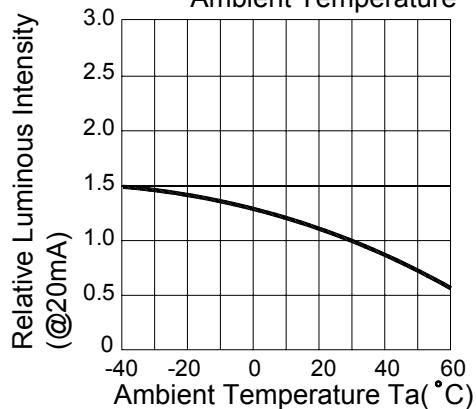


Fig.4 Relative Luminous
Intensity VS.
Forward Current

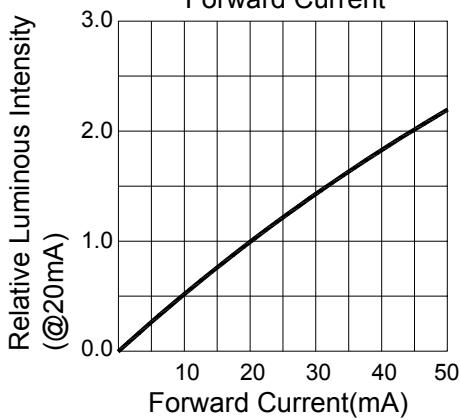


Fig.5 Forward Current
Derating Curve VS.
Ambient Temperature

